


1 2 3 4 5 6 7 8

MODEL		
STROKE	X AXIS	2020 mm
	Y AXIS	6220 mm
	Z AXIS	620 mm
	B AXIS	±100°
	C AXIS	±200°
TABLE SIZE		1300x6000 mm
MAX. FEED SPEED	X AXIS	60 M/min
	Y AXIS	80 M/min
	Z AXIS	24 M/min
	B,C AXIS	90°/sec
No.1 ATC ROUTER	No. OF SPINDLES	1
	ROTATION SPEED	1000~24000 RPM
No.2 BORING HEAD+4SIDE WAY DRILL	SPEED(VERTICAL DRILL)	4500 MRP
	VERTICAL DRILL	16
	PITCH	32 mm
CAROUSEL	NUMBER OF TOOLS	8
	SPINDLE INNER CONE	HSK-63F
TOOL DIA	FOR ROUTER BIT (OD.)	MAX. φ 25mm
POWER	No.1 ATC HEAD	11 Kw, water-cooled
	BORING HEAD	1.5Kw
	VACUUM BLOWER 250 CBM/HR	5.5Kw
AIR PRESSURE		6 atm
TOTAL CONNECTED LOAD		30Kw/52A
AIR CONSUMPTION		900 L/MIN
SUCTION CONNECTION AT CUSTOMER		φ 300



A
B
C
D
E
F

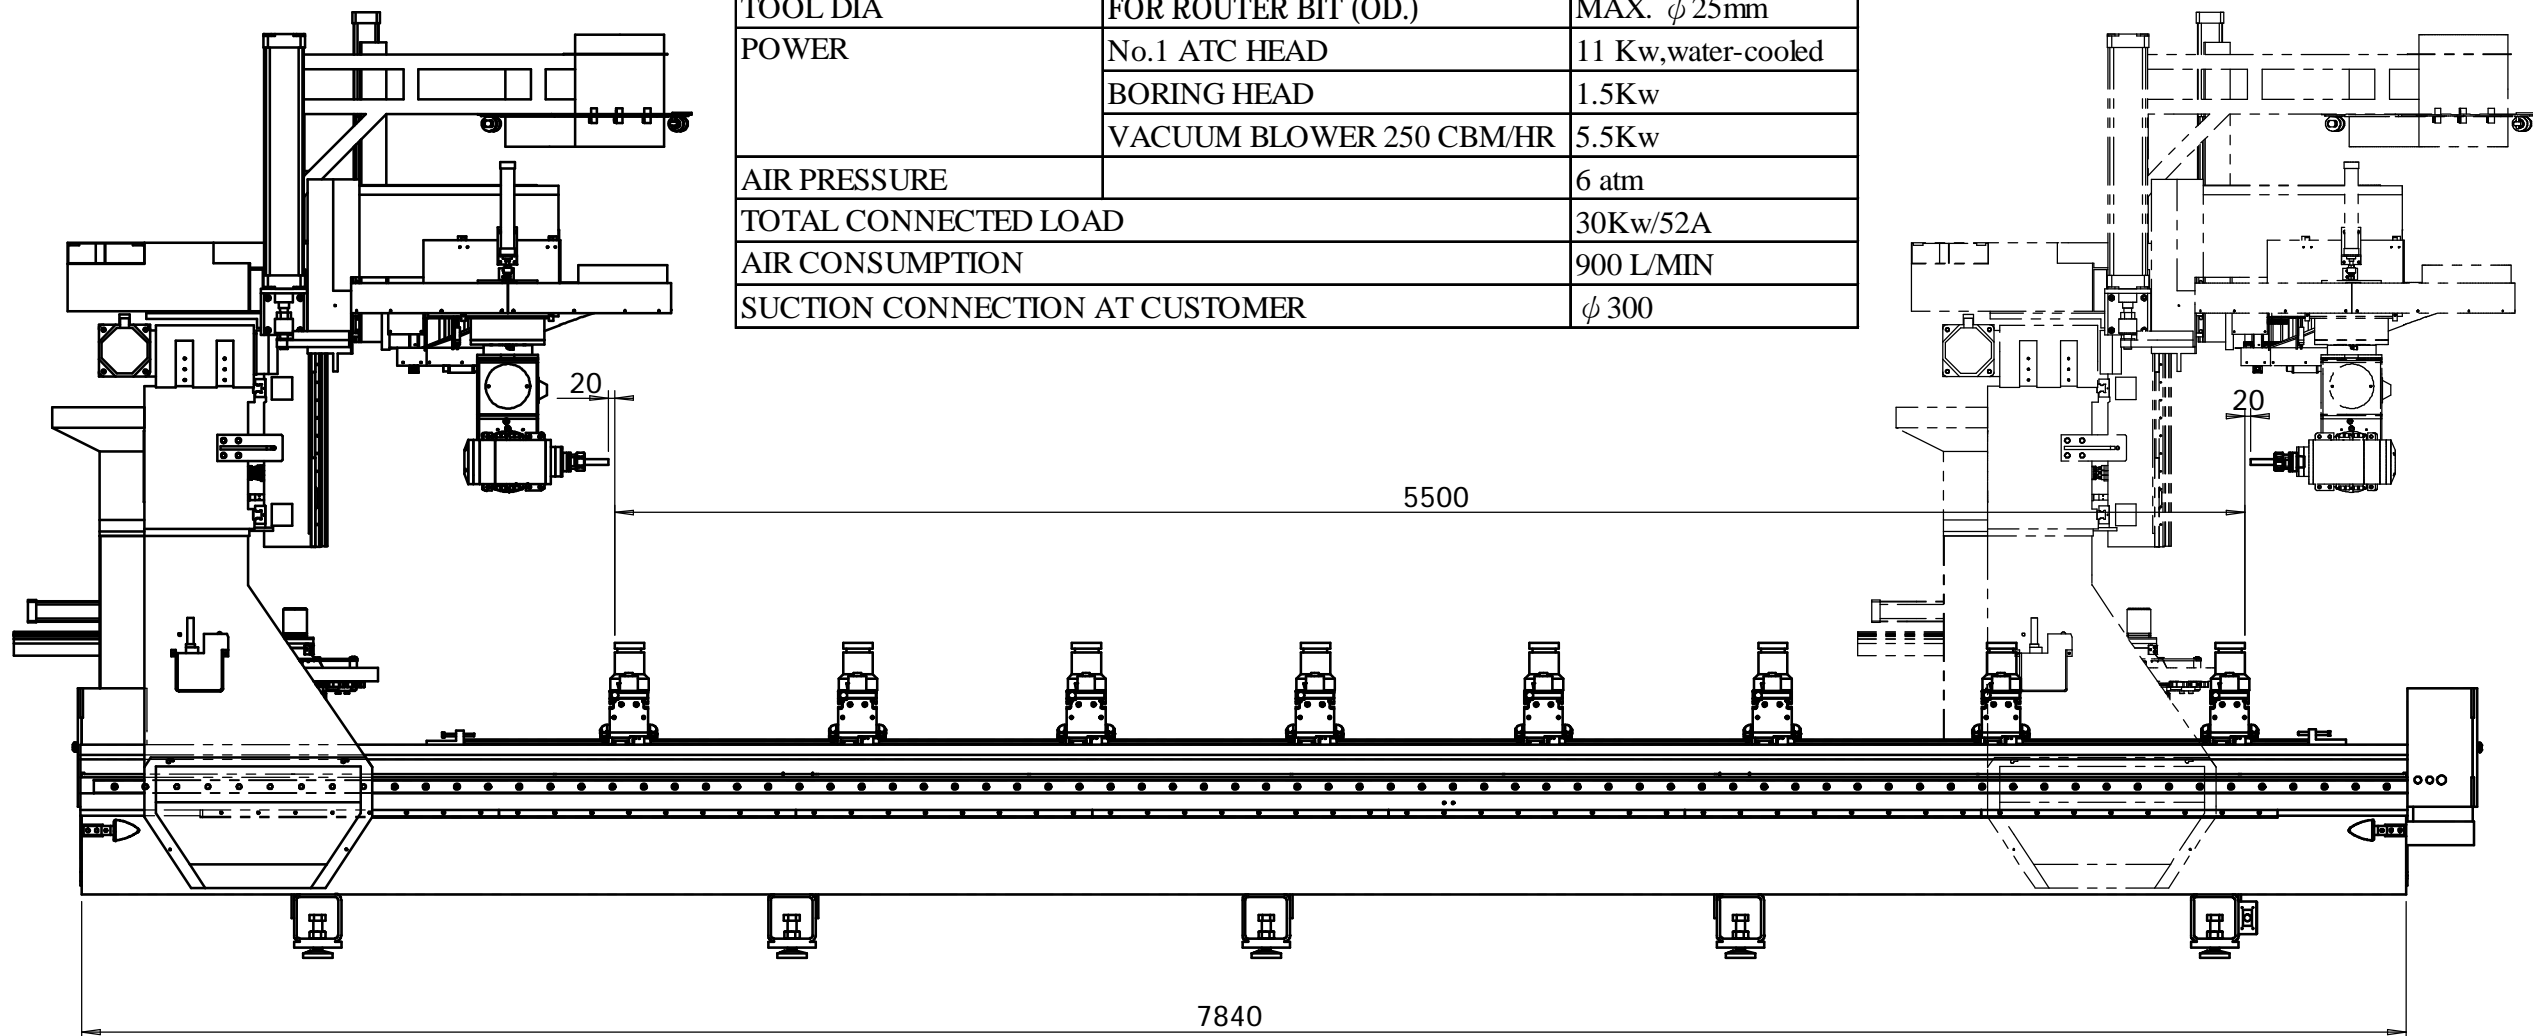