








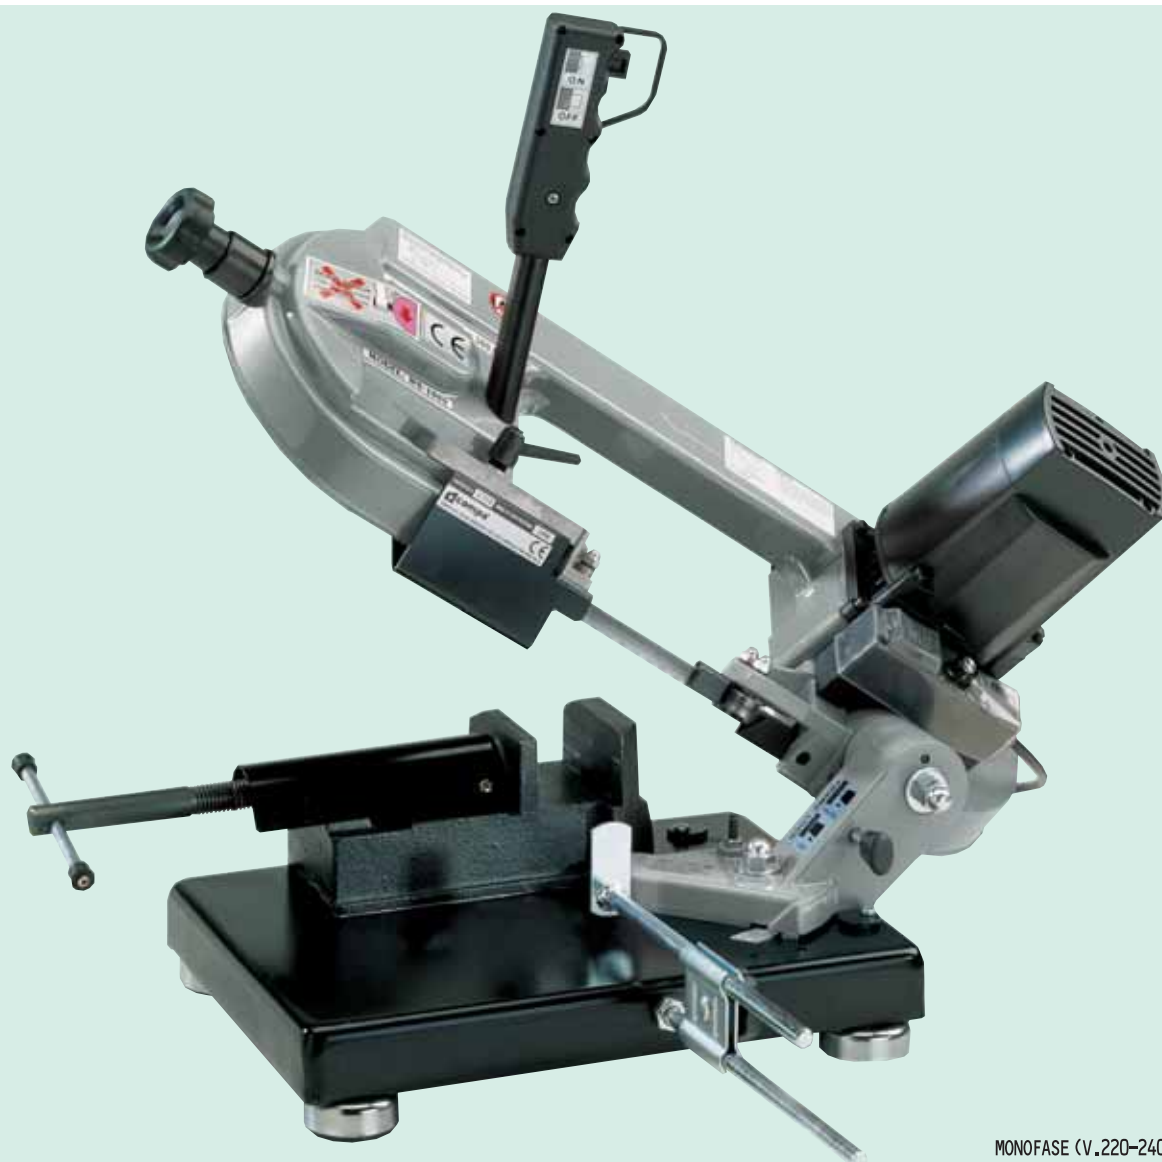


WS 1000



MONOFASE (V.220-240/50-60 HZ)



 90°	 90°	 45°	 45°		 G/min	 kW		 Kg
83 mm	110x83 mm	65 mm	85x65 mm	1.325x13x0,65 mm Z/1": 8/12MM OPTIONAL Z 6 - Z 14 - Z 18	30 / 88	1	700x350 x470 mm	17,5

Con variatore elettronico di velocità
Funzionamento a secco

Mit elektronischem Getriebe
Betrieb ohne Schmierung

With electronic speed variator
Oilless operation

Con transformador electrónico
de la velocidad
Funcionamiento en seco

Avec variateur électronique de la vitesse
Fonctionnement à sec