



KSA 8

SANDING MACHINE FOR LARGE SANDING WIDTHS



THE WHOLE PRODUCTION OF
HEESEMAN SANDING MACHINES IS
LOCATED AT THE HEADQUARTERS IN
BAD OEYNHAUSEN, GERMANY.

HEESEMANN

SANDING WITH PASSION

Heesemann has produced sanding machines for industry and handicraft for more than 80 years.

Numerous essential and trend-setting innovations were made during this time, many of which are now industry standards. Heesemann has consistently provided new impulses to the sanding technology and developed it further.


Our demand has always been to be the innovation leader in sanding technology and we do everything possible to comply with this demand.

Today Heesemann has about one hundred fifty employees in Bad Oeynhausen, Germany and is world market leader in the area of wood sanding machines. The production program includes machines for sophisticated handicraft as well as heavy duty industry machines.

A world-wide organized dealer network as well as distribution and service subsidiaries in the most important regions and markets provide appropriate contact persons on-site and guarantee short communication channels and highest-performance service.


We support our customers with diversified service offers covering the entire life-time of our machines. We offer all services starting with an extensive consultation, professional training of your staff and technical service up to functional upgrades.

*One of the first Heesemann
belt sanding machines.*

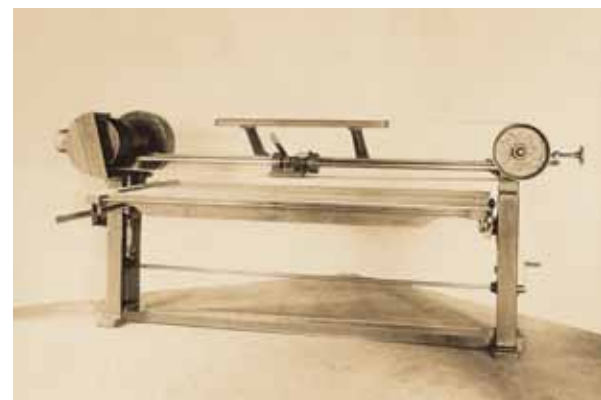



THE KSA 8 IS UNIVERSALLY IN WORKING WIDTHS AND MACHINE CONFIGURATIONS APPLICABLE FOR DIVERGENT SANDING TASKS.



up to 2 600 mm
Sanding width




5 - 25 m/min
Feed speed



up to 6
Sanding units

KSA 8

THE SANDING MACHINE FOR LARGE WORKING WIDTHS



The KSA 8 is the universal solution for working widths up to 2 600 mm. Up to 6 calibration, cross and longitudinal sanding units can be combined on the machinery base. It can be utilized for divergent sanding tasks like calibrating, fine sanding and lacquer sanding of assembled window sashes, for the industrial sanding of wide panels, for sanding wall trimmings, conference tables or desktops as well as the top covers of grand pianos.

As a sanding line consisting of a machine sanding from above and a machine sanding from underneath the KSA 8 minimizes the necessary handling costs on large work pieces.



All Heesemann sanding machines are operated via an intuitive user interface based on Microsoft® Windows® on a touch screen device.



KSA 8 AVAILABLE SANDING UNITS



Contact roller unit



Cross sanding unit



Longitudinal sanding unit



Orbital sanding unit OSR


LSM 8

EFFECT SANDING

Utilizing Heesemann surface sanding machines equipped with at least one cross sanding unit and one longitudinal sanding unit you can achieve stunning sanding effects. This is a brief description of what you can achieve and how it works:

ROUGH SAW-CUT PATTERN

Utilizing a Heesemann cross sanding unit and a very rough abrasive grain you can create an outstanding rough saw-cut pattern onto the surface of veneered boards in through-feed operation.

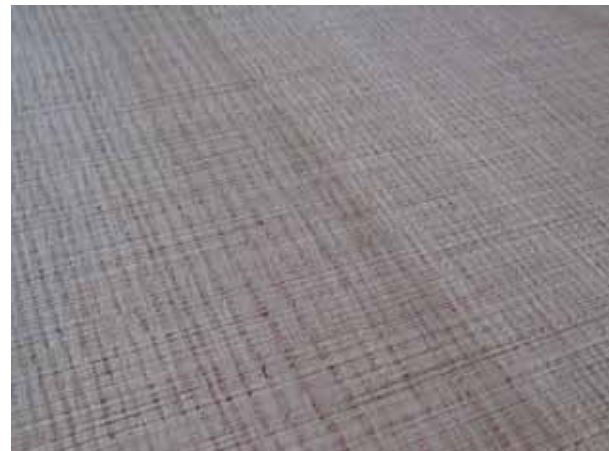

SCATTERED DEEPENINGS

Using a Heesemann longitudinal sanding unit in combination with highly flexible sanding belts, a special steel plate and a special sanding program you can create scattered deepenings onto the surface of your work pieces.



VINTAGE LOOK

You can achieve a vintage look of your work pieces using a Heesemann longitudinal sanding unit on a surface with two different lacquers. Work pieces primed with a dark paint and then lacquered with a lighter varnish can be processed using a special sanding program to create a deliberately irregular sanding result.





THE HESEMANN CONTACT ROLLER UNITS ARE OFFERED WITH STEEL ROLLERS AS WELL AS WITH RUBBER-COATED ROLLERS IN DIFFERENT SHORE HARDNESSES.


HEESEMANN CONTACT ROLLER UNIT

The Heesemann contact roller units are offered with steel rollers as well as with rubber-coated rollers in different Shore hardnesses. Both models are available with different roller diameters.

The contact roller unit with a steel roller with a diameter of 300 mm or 400 mm for example allows the exact calibration of materials like solid wood, flake boards, MDF or plastics. The surface of the roller is grooved in a spiral shape. This allows a better cooling of the roller and makes it easier to extract the generated abrasive dust.

Contact roller units with rubber-coated rollers with a diameter of 400 mm can be delivered as well. Depending on their Shore hardness they can be used for varying sanding tasks.

The contact roller unit can be equipped with different kinds of press-on lips depending on the requirements.



The contact roller unit working from underneath.





Produktionsnummer: 9999 X 100
Druckmittel: 5.450

ACHTUNG!
Gefahr bei laufender Maschine!
Nicht in den Arbeitsbereich greifen!

ATTENTION!
Danger when the machine is running!
Never reach into working area!


THE CROSS SANDING UNIT IS AVAILABLE WITH SANDING BELT LENGTHS FROM 6 600 MM UP TO 7 000 MM.

HEESEMANN CROSS SANDING UNIT

For wooden surfaces the cross sanding method achieves the worldwide accepted best sanding result. The work pieces are sanded crosswise to the grain direction first and are afterwards sanded in direction of the grain with one or more sanding units.

This way the upper harder areas of the annual rings are leveled and loosened fibres are sheared off whereby a wash out effect is avoided and the fibres cannot straighten up again after lacquering.

The Heesemann cross sanding units are equipped with the Heesemann CSD® magnetic pressure beam system and a pressure segment belt. They are available as three-point and four-point units as well as with commonly or separately driven pressure segment belt.



The sanding dust is removed from the sanding belt directly after the sanding process.





THE LONGITUDINAL SANDING UNIT
WITH THE LONG BELT LENGTH
OF 3 250 MM.

Plaque de lecture 14mm
avec 3 boutons de réglage (rouge, blanc, noir)
Plaque de lecture 14mm
avec 3 boutons de réglage (rouge, blanc, noir)
Niveau de réglage en vert de lecture
avec 3 boutons de réglage (rouge, blanc, noir)
de la position de réglage
avec 3 boutons de réglage (rouge, blanc, noir)

HEESEMANN

LONGITUDINAL SANDING UNIT

A longitudinal sanding unit with an optimized distance between the lower return drums allows a large amount of a freely suspended sanding belt for a highly flexible pressure onto the work piece. This way a smooth sanding and high working speeds are achieved.


The longitudinal sanding units are available for sanding belts with belt lengths of 2 620 mm or 3 250 mm.

Optionally the longitudinal sanding unit can be equipped with an eccentric bearing of the front return drum for slight calibration work (**combi unit**). The return drum is activated via the terminal. The return drums may either be flat or grooved.

The **longitudinal unit with an internally running pressure segment belt** is a reasonable addition to many applications that makes sense. The pressure segment belt interrupts the sanding traces of the grit and thus offers a harmonious and more even sanding pattern.

If a particularly fine grit is being used for lacquer sanding, the pressure segment belt may significantly increase the lifetime of the abrasive material.

Two eccentrics are located on the unit by means of which the guide drums can be readjusted in accordance with the wear of the pressure segment belt. This compensates the wear on the pressure segment belt, and its lifetime is extended several times.



The longitudinal sanding unit is equipped with the Heesemann CSD® system that has proven its worth for more than 25 years.




HEESEMANN BRUSH UNITS

For Heesemann sanding machines a wide variety of brush units with different trimmings for sanding and structuring are available. The brush units can be mounted inclined to the feed direction or can be equipped with an oscillation.

Heesemann offers brushes with horse hair, fibre, sisal strings and mixed trimmings to clean the work pieces, fleece brushes for satin lacquered surfaces, brushes with Flex Trim abrasive trimmings to sand 3-dimensional work pieces and brushes with Anderlon or stranded wire trimmings as well as twisted knot brushes to structure the work pieces.

THE HEESEMANN BRUSH UNITS CAN
OPTIONALLY BE EQUIPPED WITH A OSCILLATION
MECHANISM.



The Heesemann brush units can be equipped with different trimmings for sanding or structuring.



Zahnriemenabmessung
Pas zabaty HTD 560





THE COMPUTER-CONTROLLED SELECTIVE PRESSURE REGULATION OF THE CSD® MAGNETIC BEAM SYSTEM CAN SMOOTHLY ADJUST THE SANDING PRESSURE TO EVERY INDIVIDUAL ELEMENT IN THE PRESSURE BEAM WITHIN MILLISECONDS.

HEESEMANN

CSD® MAGNETIC PRESSURE BEAM


The precise control of the sanding pressure is decisive for a consistently high-grade sanding quality.

The computer-controlled selective pressure regulation of the CSD® magnetic beam system infinitely adjusts the sanding pressure within milliseconds to every individual element in the pressure beam. A highly sensitive sensing system at the infeed supplies the data for exact calculation of the required pressure.

The elastic pressure beam compensates for work piece thickness differences of 2 mm and more, whether the variation occurs within a single work piece or from one work piece to another.

A pollution of the pressure beam elements as it may occur on pneumatically working systems is impossible at the electromagnetically working CSD® pressure beam system.

The CSD® magnetic pressure beam is an integral part of all Heesemann cross and longitudinal sanding units.

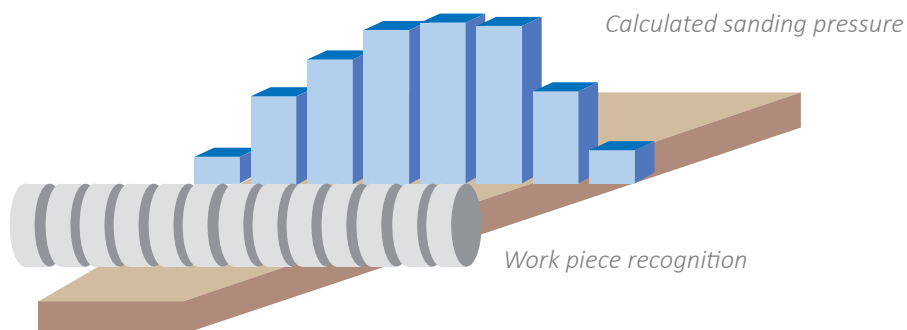

The elastic pressure beam compensates for workpiece thickness differences of 2 mm and more.




From our EnergyManagement-System our environment and the machine-user benefit to the same degree. A diminished energy consumption unburdens the environment and reduces the cost.

HEESEMANN ENERGYMANAGEMENT-SYSTEM (EMS)


The KSA 8 can optionally be equipped with the EMS system. Both, our environment and our users, benefit from this energy-saving system to the same degree. A diminished energy consumption unburdens the environment and reduces the cost.

If no work pieces are being fed into the machine, the drive motors of the sanding units are run down to a low speed and a flap is closed on the suction blower in order to extremely reduce the air throughput. Depending on its actual load, this reduces the energy consumption of the machine quite considerably. When new work pieces are fed into the machine, all motors are rapidly started up again.

If the customer-supplied extraction system provides this option the machine can prevent the airflow through units that are not in operation by controlling closure flaps attached to the individual extraction hoods and thus make the extraction system save energy.

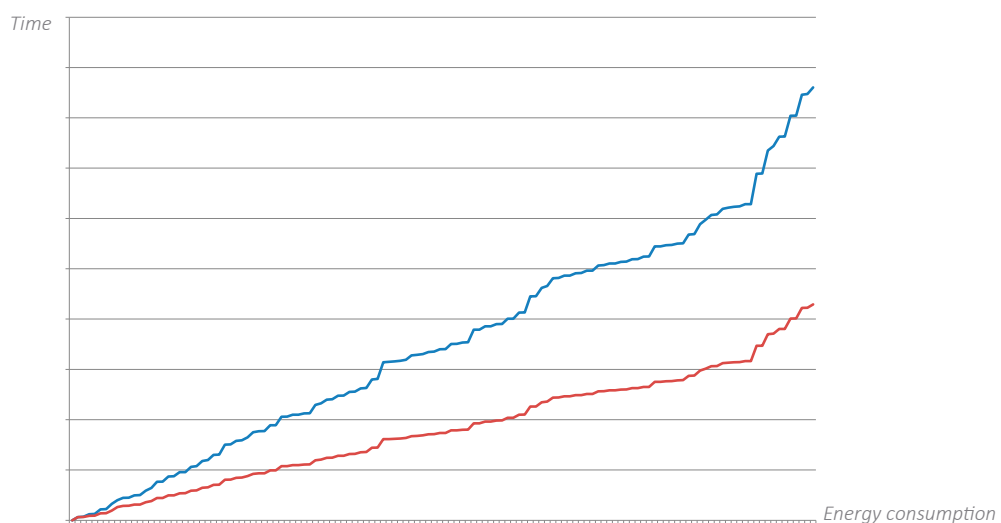

The use of our EnergyManagement System leads to significant savings at the power consumption of the machine and the whole installation.

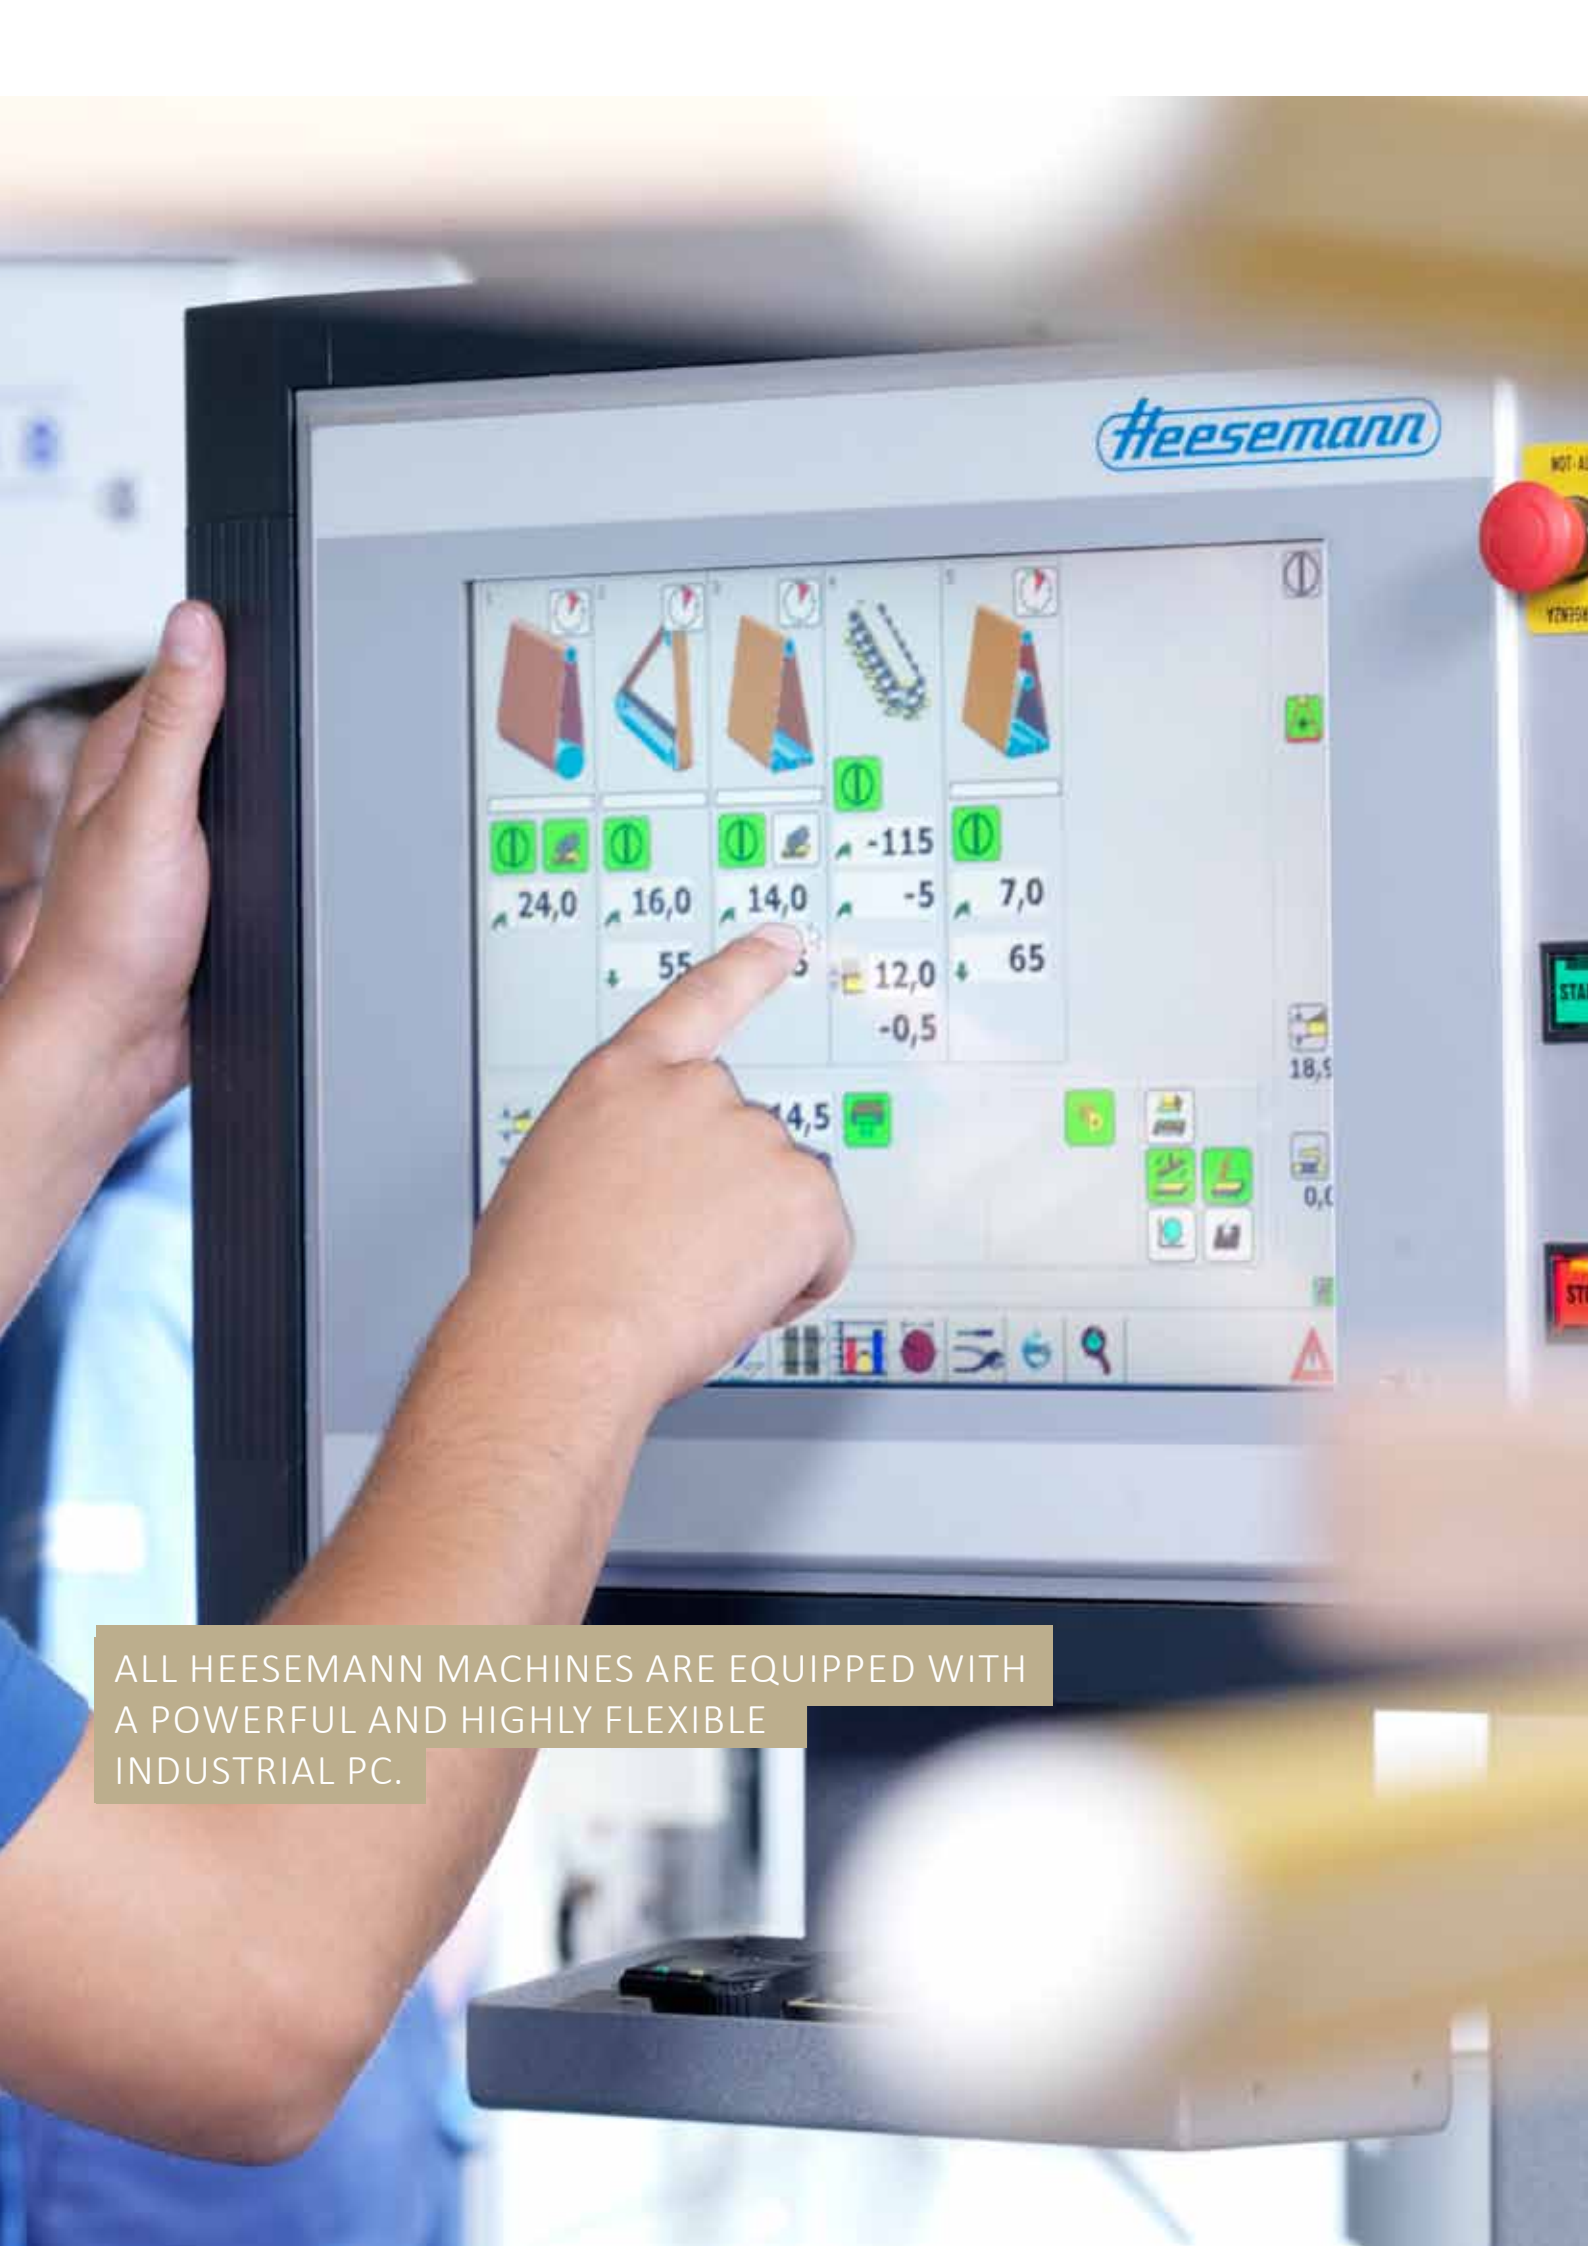

ALL HEESEMANN MACHINES ARE EQUIPPED WITH A POWERFUL AND HIGHLY FLEXIBLE INDUSTRIAL PC.

HEESEMANN

IPC WITH TOUCHSCREEN

All Heesemann machines are equipped with a powerful and highly flexible industrial PC. All frequently repeated adjustment values are graphically displayed clearly on one screen page.

In addition, this industrial PC provides diversified applications for diagnosis and the ability to use peripheral equipment via standard interfaces. Furthermore, it can be connected to internal and external networks using Ethernet TCP/IP. The industrial PC acts like a web server and is diagnosable via standard browsers.

The industrial PC of the KSA 8 has a screen size of 15". It provides an operating data recording and is moveable to the operators' eye-height by a pivot mounted arm.



The industrial PC of the KSA 8 has a screen size of 15".



KSA 8

WORK PIECE DETECTION

The delicate work piece detection by means of control rollers at distances of 21 mm or optionally 16 mm provides the machine control system with information about the shape and size of the work pieces to be processed as well as its position on the transport belt.



KSA 8

POLY-V DRIVE BELTS

The units are driven by a vibration-free poly-V belt. The profile of the drive belt is integrated into the most finely balanced drive roller (quality class G1, cf. car tyre G40). This way a permanently low vibration run is ensured. All bearings have been lubricated for life; this excludes maintenance errors in the selection of the lubricant and the lubrication intervals as well as assembly faults; any maintenance work is not required.



KSA 8


SANDING BELT CLEANING

All sanding units are equipped with a cleaning device that loosens the sanding dust from the sanding belt and makes it ascertainable for the dust extraction. This cleaning takes place directly after the sanding process has been completed so that the sanding belt does not move the sanding dust through the machine.



KSA 8 SERVO DRIVES

Due to the use of new and extremely thin lacquer systems it can become necessary to reduce the sanding belt speeds to lower speeds than generally achievable with frequency inverters. Water-cooled servo drives allow a constantly safe belt run with full sanding power at minimal sanding belt speeds of 0.1 m/s. Machines equipped with these servo drives can be used for water lacquer systems for example. The water-cooled servo drives are comparable to efficiency class IE 4.

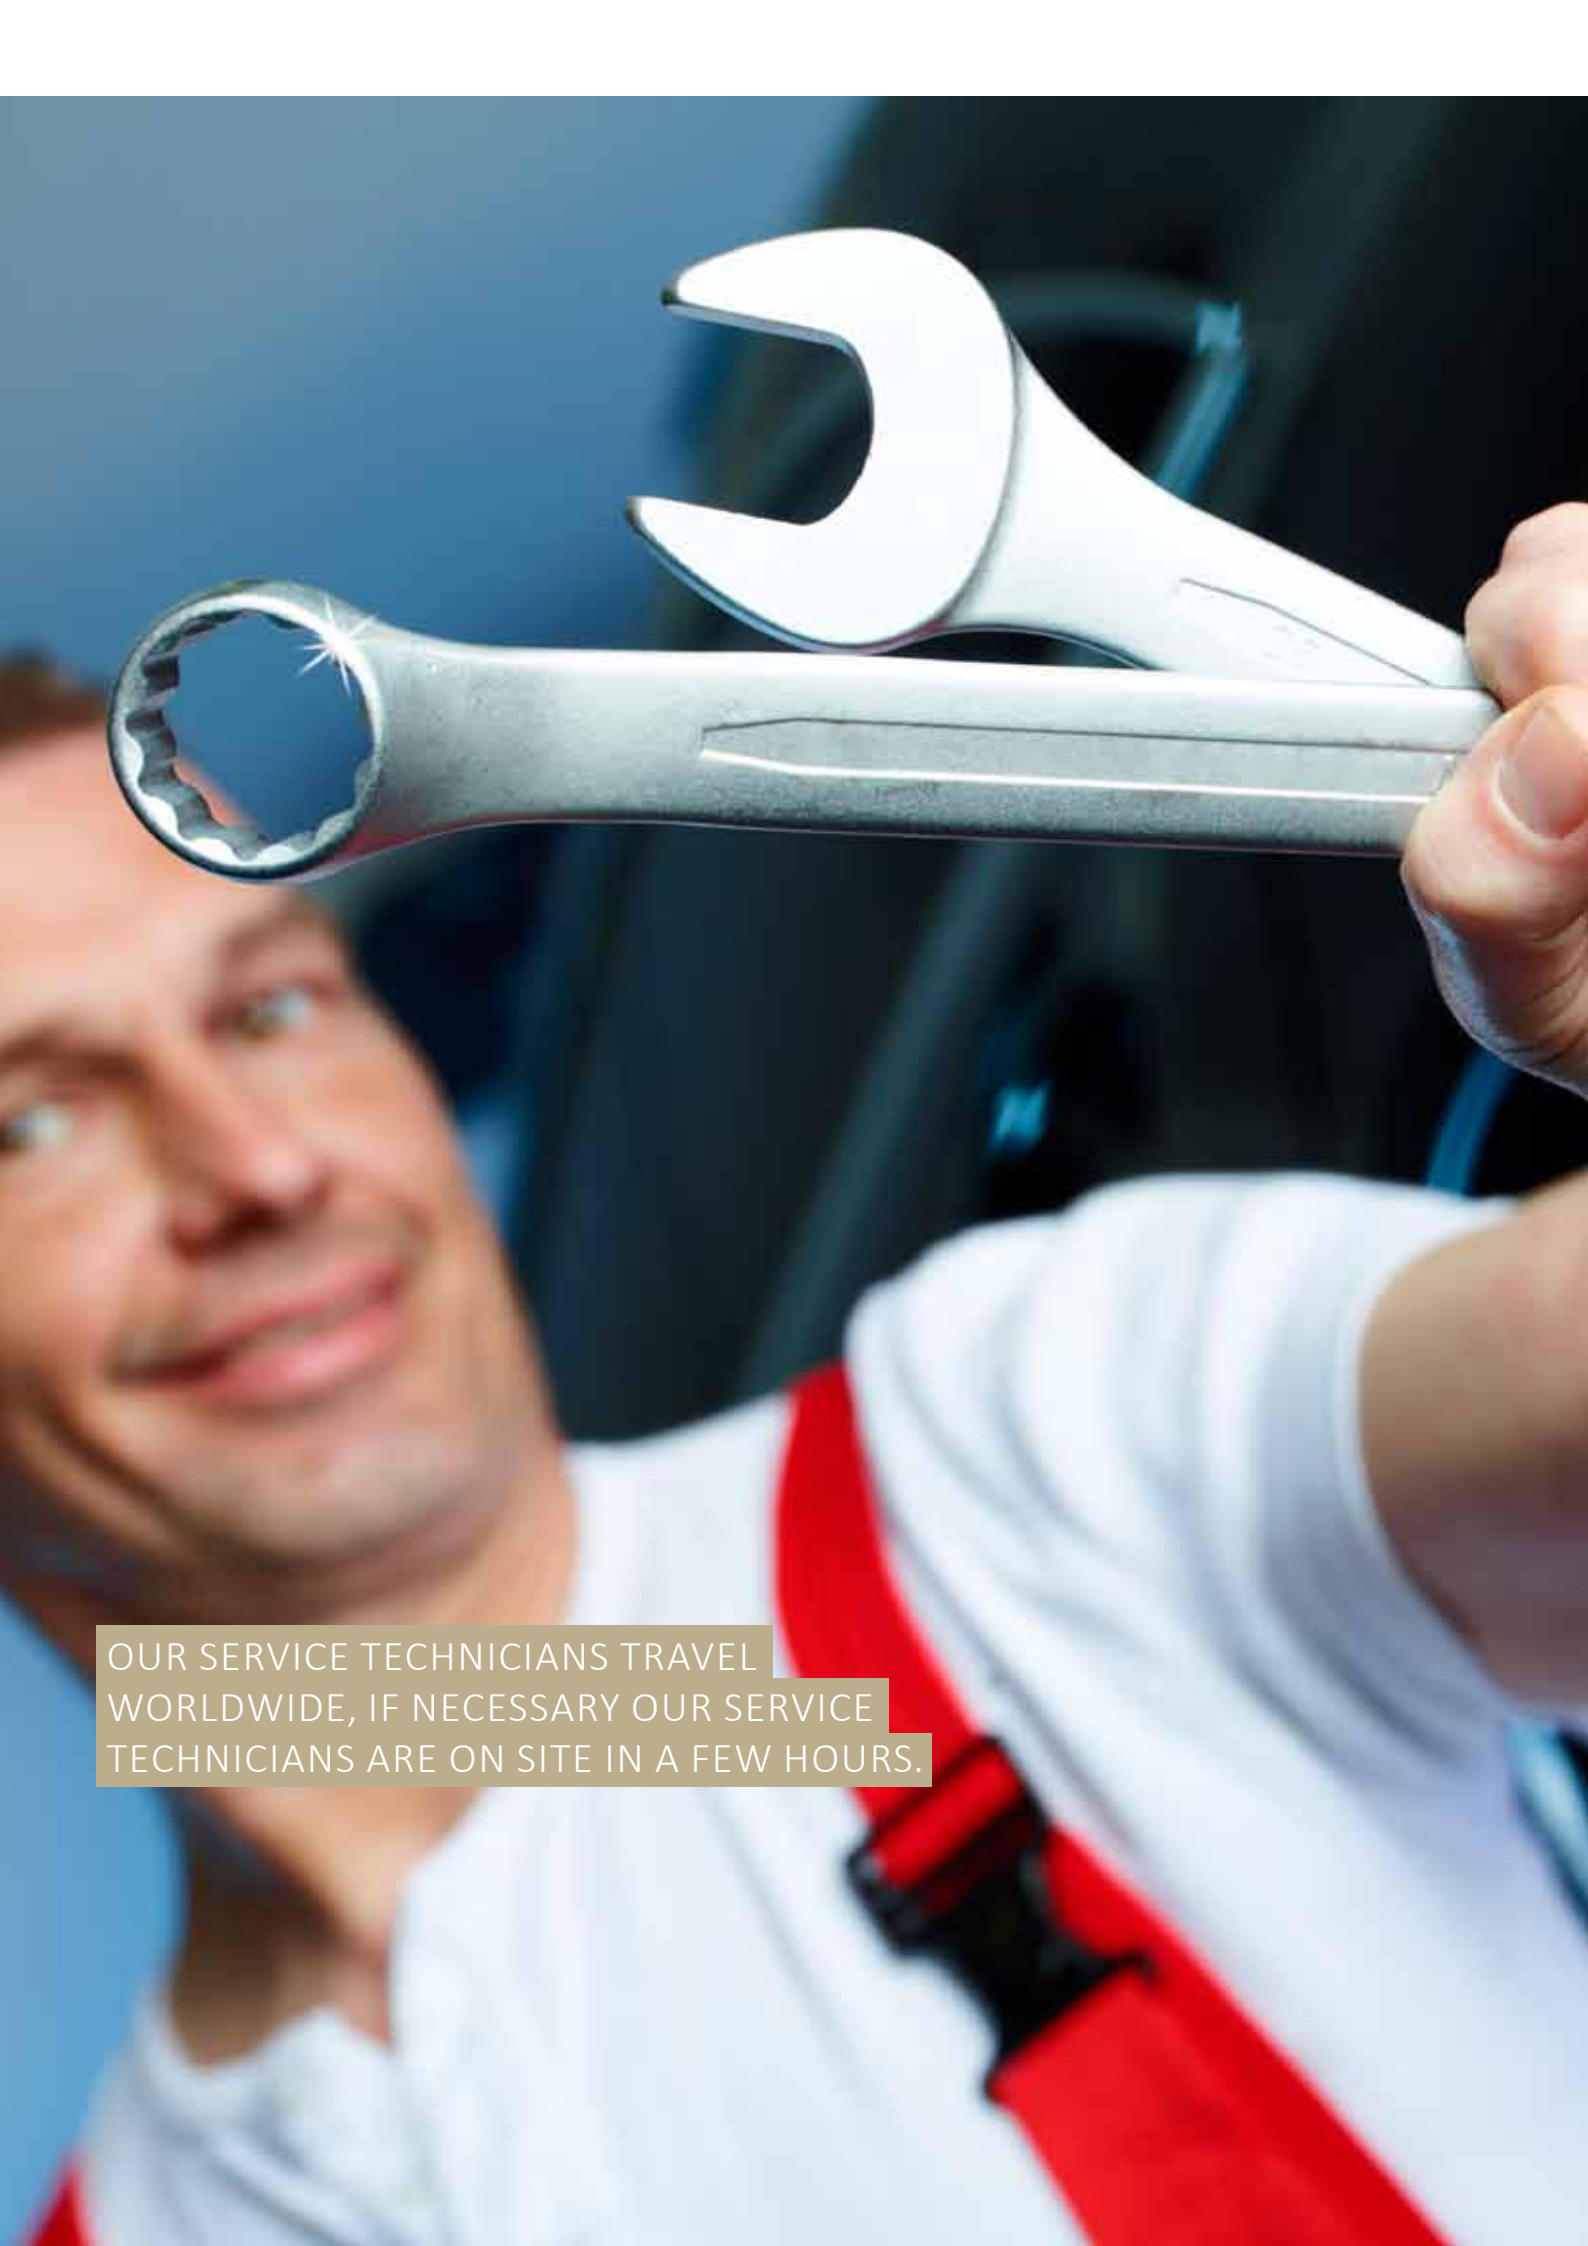

OUR SERVICE TECHNICIANS TRAVEL
WORLDWIDE, IF NECESSARY OUR SERVICE
TECHNICIANS ARE ON SITE IN A FEW HOURS.

HEESEMANN

SERVICE - ONSITE WORLD-WIDE

As a manufacturer of technically mature and individual machines with a long machine life our customers' satisfaction is our highest priority. To prove our customers' confidence in our competence is one of our most important tasks.

Our technical customer service supports you discovering an effective solution for possible problems. If an advice by phone is insufficient, an online diagnosis via tele service can take place. If the intervention of a technician is necessary, no problem- our service technicians travel worldwide, if necessary our service technicians are on site in a few hours.

Heesemann offers their customers all classical service activities like installation, maintenance and repair. We ensure a fast supply of wear and spare parts by our extensive spare parts warehouse. In cooperation with our logistic partners we deliver worldwide, fast and reliable. Heesemann delivers original spare parts exclusively which meet our high demands in their fitting accuracy, material properties, durability and functionality.

Our inspection service provides a detailed evaluation of your machines' technical condition. On demand we prepare offers for further provisions, installation possibilities of latest sanding technology and control upgrades.

Such as our machines our customer service and spare parts are warrantors for quality and reliability "made in Germany".



Service hotline:
+49 5731 - 188-0


*Our service team is available on working days
between 7 am and 5 pm.*






MACHINE CONFIGURATIONS FREQUENTLY CHOSEN

Solid wood sanding




KSA 8 R/C/L

Calibration and fine sanding machine for very high surface qualities




KSA 8 R/R/L

Calibration and fine sanding machine for high stock removal



KSA 8 R/C/L/L


Calibration and fine sanding machine for high surface qualities with fine final grains



KSA 8 R/R/R/R/L/L


Calibration and fine sanding machine for high material removal or very high speeds

Veneer sanding




KSA 8 C/L

Cross sanding machine for low feed speeds




KSA 8 C/L/Lef

Cross sanding machine with pressure segment belt for medium feed speeds



KSA 8 C/L/L/L


Cross sanding machine for high feed speeds



KSA 8 L/Q/Q/L/Lef


Sanding machine for workpieces with different veneer directions

Lacquer sanding




KSA 8 L

Sanding machine for low application quantities




KSA 8 L/L

Sanding machine for higher application quantities



KSA 8 C/L/Lef


Sanding machine for higher application quantities and high feed speeds



KSA 8 C/L/C/C


Sanding machine for high gloss lacquers

Sanding machines working from below




KSA 8-U R

Calibration machine



KSA 8-U C/L

Cross sanding machine for low feed speeds






KSA 8-U W/L

Calibration and fine sanding machine




TECHNICAL DATA

KSA 8 - UNITS



Modules

	Contact roller	Cross unit	Longitudinal unit	Longitudinal unit with pressure segment belt
Sanding belt dimensions (LxB mm)	2 620 x 1 650 3 250 x 1 650 3 250 x 2 050 3 250 x 2 350 3 250 x 2 650	6 600 x 150 7 400 x 150 8 000 x 150 8 600 x 150	2 620 x 1 650 3 250 x 1 650 3 250 x 2 050 3 250 x 2 350 3 250 x 2 650	2 620 x 1 650 3 250 x 1 650 3 250 x 2 050 3 250 x 2 350 3 250 x 2 650
Drive performance (kW)	37 - 75	16,5 / 21,0 20,0 / 24,0 26,0 / 31,0	16,5 / 21,0 20,0 / 24,0 26,0 / 31,0	16,5 / 21,0 20,0 / 24,0 26,0 / 31,0
Sanding belt speed (m/s)	24	12 / 24 0,2 - 12 0,6 - 24	10 / 20 0,5 - 12 0,5 - 20	10 / 20 0,5 - 12 0,5 - 20
Connection diameter (mm)	Ø 250	Ø 160	Ø 160	Ø 160
Air velocity (m/s)	min. 20	min. 20	min. 20	min. 20



Modules

	Brushes	Fleece brushes	Cleaning brushes
Sanding belt dimensions (LxB mm)	Ø 400	Ø 250	Ø 120
Drive performance (kW)	5,5 - 22,0	4,0 - 7,5	2,2 - 7,5
Sanding belt speed (m/s)	50 - 4 000		
Connection diameter (mm)	Ø 160	Ø 160	Ø 160
Air velocity (m/s)	min. 20	min. 20	min. 20

Extraction value for the transport belt cleaning 18.5 m³/min.

TECHNICAL DATA

KSA 8

Machinery base: Working height 880 mm

Sanding width (mm)	Width (mm)	Length 1 unit (mm)	Length additional unit (mm)	Weight (kg)
1 600	2 650	2 560	700	
2 000	3 050	2 180	830	
2 300	3 350	2 180	830	
2 600	3 650	2 200	830	


Subject to technical modifications.

PRODUCT MATRIX





SURFACE SANDING MACHINES

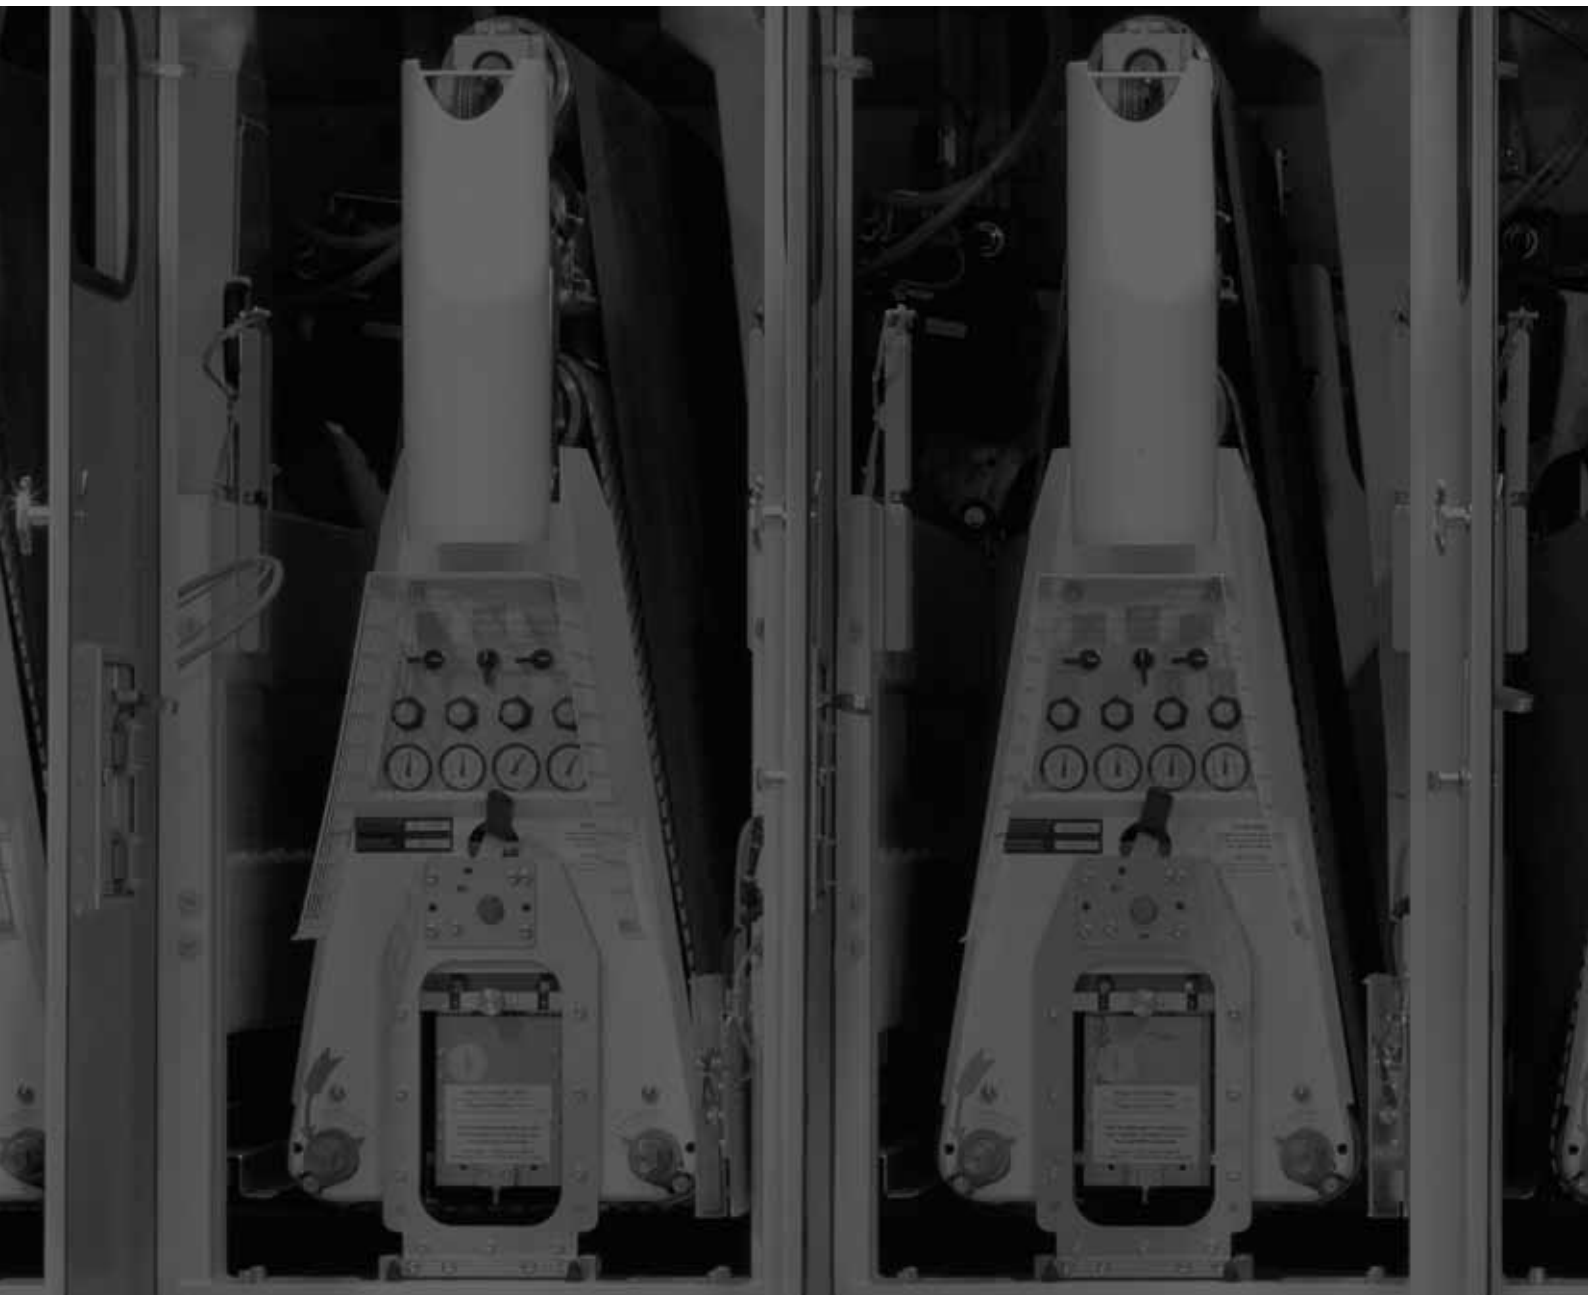

	Sanding width	Feed speed	Sanding units
HSM	1 300 mm	3 - 15 m/min	2 or 3
MFA Impression	1 350 mm	3 - 15 m/min	up to 4
MFA 10	1 350 mm	3 - 25 m/min	up to 6
BM 8	1 350 mm	3 - 25 m/min	up to 6
LSM 8	1 300 mm / 1 400 mm	5 - 25 m/min	up to 6
KSA 8	1 600 mm - 2 600 mm	3 - 25 m/min	up to 6
FBA 8	650 mm / 1 350 mm	6 - 30 m/min	up to 4



Karl Heesemann Maschinenfabrik GmbH & Co. KG
P. O. Box 10 05 52, 32505 Bad Oeynhausen
Reuterstraße 15, 32547 Bad Oeynhausen
Germany
Phone: +49 5731 188-0
Fax: +49 5731 188-129
www.heesemann.com
sales@heesemann.de

-  Surface sanding machines for wood
MFA Impression, KSA 8, LSM 8, KSA 8, BM 8, FBA 8
-  Surface sanding machines for metal
MSM 10
-  Edge and profile sanding machines
UKP 20
-  Sanding machines for 3D processing
BM 8, UKP 20