



Router Optimat BOF 41/R with grid table

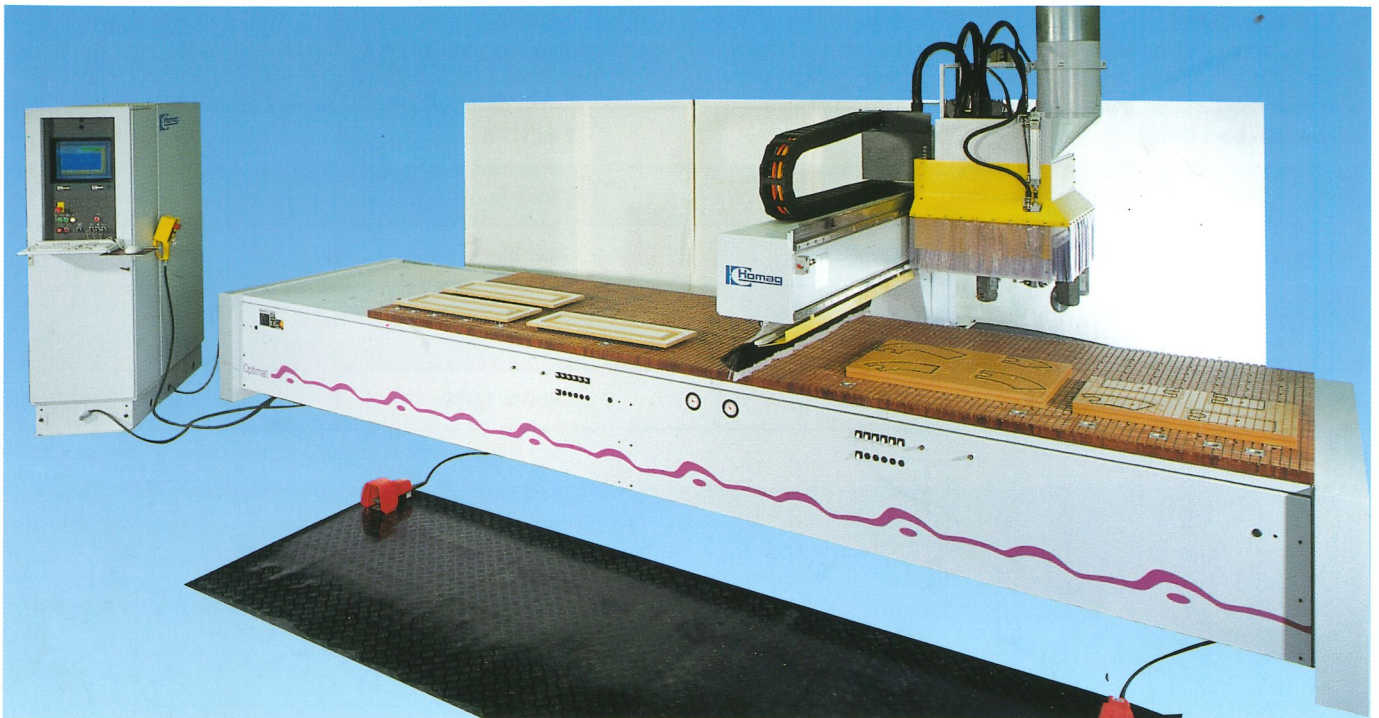


Low-cost all-round machine for cabinet shops and interior fitters


For all kinds of sizing and profiling, drilling, grooving and dividing work. Grid table with grooved surface designed to permit insertion of a rubber sealing cord or a flexible vacuum plug-in module for individual workpiece clamping.

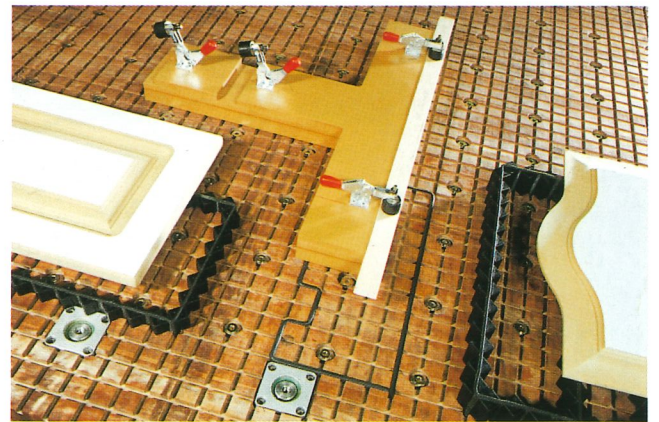


Vacuum plug-in module and clamping device
for the grid table

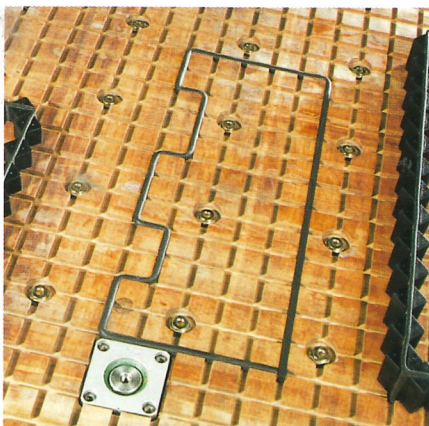

Grid table with sealing cord

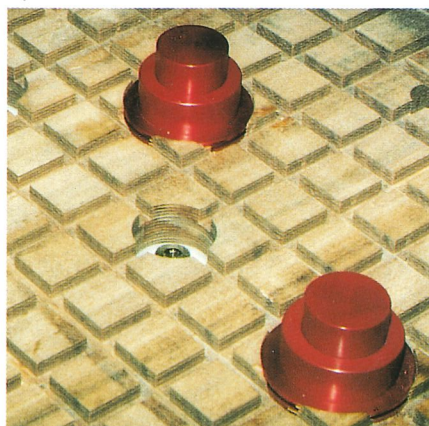


Stop bolts

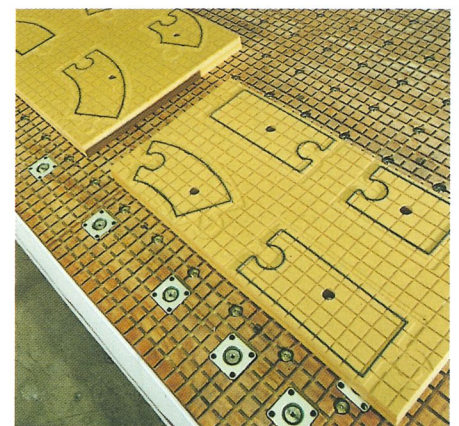

Grid table with clamped templates

Specifications

Type	Optimat BOF 41/30	Optimat BOF 41/45
A = Length [mm]	5.750	7.250
B = Width [mm]	4.000	4.000
C = Height [mm]	2.400	2.400
Extraction output for main spindle [m ³ /h]	7.850	7.850
Extraction port [mm]	1 x Ø 315	1 x Ø 315
Compressed air consumption [NL/min]	ca. 300	ca. 300
Connected load [kW]	ca. 25	ca. 25
Max. workpiece sizes [mm]	Single workpiece loading	3.000 x 1.150
	Dual workpiece loading	2 x 1.250 x 1.150
Alternate processing (optional)	2 x 900 x 1.050	2 x 1.650 x 1.150

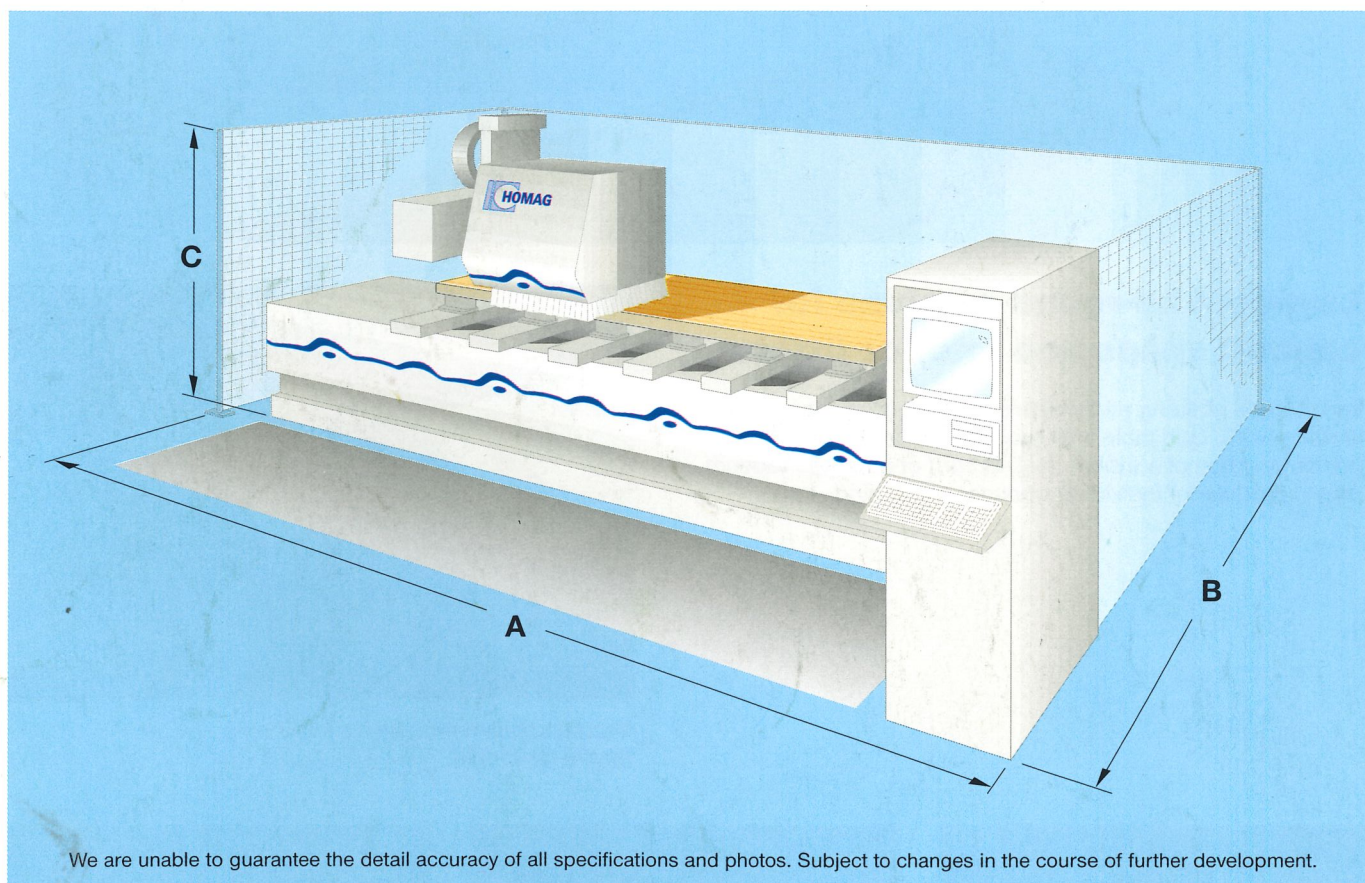

Homag Holzbearbeitungssysteme AG
 Homagstrasse 3-5
 D-72296 Schopfloch
 Tel. +49 (74 43) 13-0
 Fax +49 (74 43) 13 23 00
 info@homag.de
 http://www.homag.com