

Standard equipment

- | length of work table 2750 mm
- | size of fence 1300x180 mm
- | tiltable fence 0° - 45°
- | cutter head Ø 120 mm; 4 knives
- | manual star/delta switch
- | electromagnetic brake
- | exhaust outlet Ø = 150 mm
- | CE certification



| S E R I E

CE

SR

330/430/530


Technical data - Standard

SR		330	430	530
Work table width	mm	350	450	550
Length of work table front/rear	mm	1480/1220	1480/1220	1480/1220
Max. thickening width	mm	330	430	530
Cutter head diameter	mm	120	120	120
Number of knives	pcs	4	4	4
Cutter head speed	rpm	4700	4700	4700
Max. workpiece removal	mm	5	5	5
Motor	kW	3	4	4
Main motor speed	rpm	2880	2880	2880
Tiltable fence	°	0-45°	0-45°	0-45°
Exhaust outlet diameter	mm	150	150	150
Recommended min. exhaust capacity	m ³ /hr	1800	2000	2500
Exhaust air speed	m/s	22	22	22
Machine length	mm	2760	2760	2760
Machine width	mm	720	820	920
Machine height	mm	1300	1300	1300
Machine weight	kg	420	486	620



Optional equipment

- | motor 5,5HP (4kW) for SR 330
- | motor 7,5HP (5,5kW) for SR 430, 530
- | automatic star/delta switch
- | upper control panel
- | foldable cutter head guard
- | auxiliary fence for processing narrow workpiece
- | knife setting device with indicator
- | set of knives for standard 4 - knife cutter head
- | grooved table
- | cutter block for tersa knives

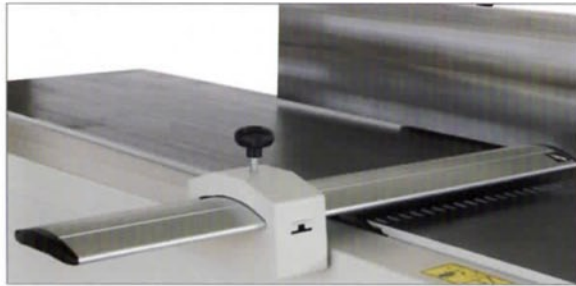

Ⓢ: CUTTER HEAD GUARD



Ⓞ: FOLDABLE CUTTER HEAD GUARD



Ⓢ: TILTABLE FENCE 0° - 45°



Ⓢ: ADJUSTMENT OF TILTABLE FENCE



Ⓢ: ADJUSTMENT OF WORKPIECE REMOVAL



Ⓢ: DEPTH OF CUT INDICATOR



Ⓞ: UPPER CONTROL PANEL