
Spindle Shapers



HOLYTEK

Heavy Duty Type Industrial Spindle Moulder 735 Series With Pedal Lock & Brake of Spindle Standard

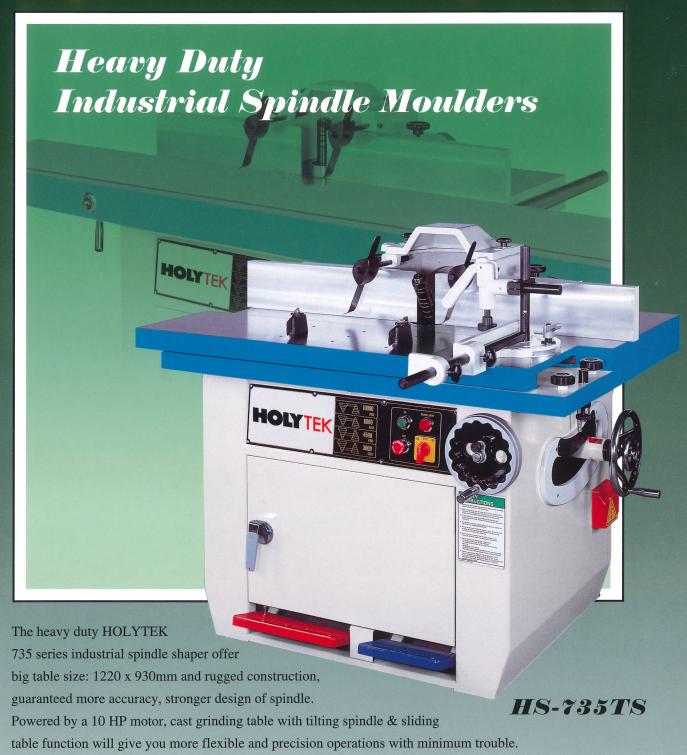

HS-735MS (W / Sliding table)

HS-735T (W / Tilting spindle)

HS-735M (Fixed Table)

FEATURES

INTERCHANGEABLE SPINDLES:

Choose from five spindle diameters: 1-1/4", 30mm, 35mm, 40mm and 50mm. The spindle has MK5 taper, thereby assuring precision fitting.

SPECIFICATIONS

MODEL	HS-73	5M, MS	HS-73	5T, TS
Spindle dia. for choice	1-1/4", 30mm, 35mm, 40mm			
Spindle speed	3,000, 4,500, 7,500, 10,000 rpm			
Taper of spindle	MK5			
Spindle motor	10 HP			
Spindle travel	180mm			
Tilting angle	-		-5° ~ 90° ~ +45°	
Max. table insert diameter	13-1/4" (336mm)			
Table size	48" x 36-1/2" (1220 x 930mm)			
Table height	35-1/2" (900mm)			
Sliding table size	48" x 13" (1220 x 330mm)			
Sliding table travel	46" (470mm)			
Fence size	23-1/2" x 5-3/4" (600 x 146mm)			
N.W.	650 kgs	700 kgs	700 kgs	750 kgs
G.W.	750 kgs	800 kgs	800 kgs	850 kgs
Packing dimensions (cm)	107(L) x 71(W) x 127(H)		107(L) x 107(W) x 127(H)	

^{*} Specifications and design characteristics are subject to change without prior notice.

QUICK CHANGE SPINDLE SPEED:

Spindle speeds of 3,000, 4,500, 7,500 and 10,000 rpm can be achieved, driven by a four-speed pulley. By simply loosening a lock lever and shifting the assembly, the speed may be changed quickly and efficiently.

VERSIBLE SPINDLE ROTATION:

The double-locked spindle guarantees safe rotation in both clockwise and counter-clockwise directions.

FIVE TABLE INSERTS : (Max. dia.13-1/4'')

LARGE FENCE (Heavy Type):

All cast aluminum alloy fence with micro adjustment knob and precise size.

HS-735L W/LONG TABLE

Table size: 2235x930mm & front support for large stocks ex. doors

OPTIONAL FOR ROUTING SPINDLE



HOLYTEK INDUSTRIAL CORP.

9F-1, NO. 400, SEC. I, CHANG PING RD., TAICHUNG, TAIWAN, R.O.C.
TEL: 886-4-2245-2818 (REP.) FAX: 886-4-2243-6928
E-mail: holytek@ms13.hinet.net
http://www.holytek.com.tw