

LINE BORING MACHINE






FEATURES

- Convenient detachable machine frame assures durability.
- Down feed boring operations.
- Mechanical digital read out allows for accurate and consistent depth setting without scratching the panel surface.
- Convenient operation is made by simply pressing on a foot pedal. Easy to maintain.

■ Motor starts only when in boring stroke to extend service life, save power consumption and reduce noise.

■ Fence and stop are fast set to the desired size.

■ Quick release chucks provide convenient changing of boring bits.

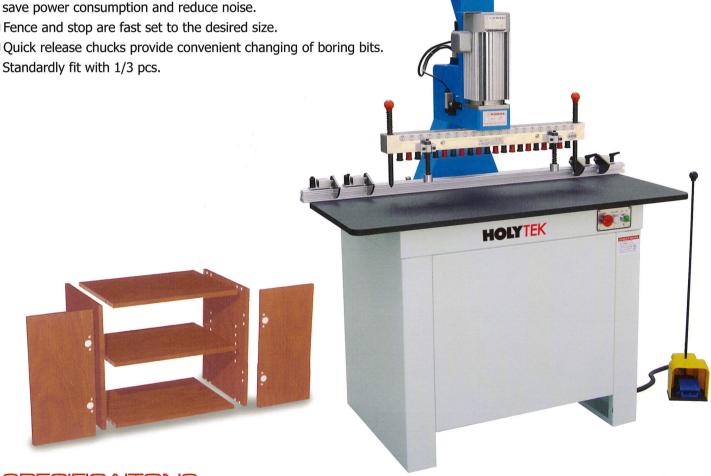

SPECIFICAITONS

MODEL	HS-A15	HS-A21
Motor	2 HP	2.5 HP
Table size	480×1200 mm	480×1200 mm
Max. drilling depth	60 mm	60 mm
Max. distance between centers	32 mm	32 mm
Compressed air required	6~8 kg/cm ²	6~8 kg/cm ²
Number of spindles per boring head	15	21
N.W. / G.W. (kgs)	140 / 190	150 / 200
Machine size (mm)	1200×700×1520	$1200 \times 700 \times 1520$
Packing size (mm)	1340×750×1720	1340×750×1720

^{*}Specifications subject to change without prior notice.