

# AUTO. DOVETAIL TENONER & PNEUMATIC CLAMP FOR DOVETAIL JOINTS



The new HOLYTEK Auto. Dovetail Tenoner & Pneumatic Clamp for Dovetail Joints is an excellent partner for drawer and box work.


It provides high performance and precision of dovetail tenoning on a high speed spindle with 20000 RPM rotation. It is designed for long-term operation, easy set-up and minimum maintenance.

## HOLYTEK


[www.hoechsmann.com](http://www.hoechsmann.com)




### Drawer Production Step Diagram

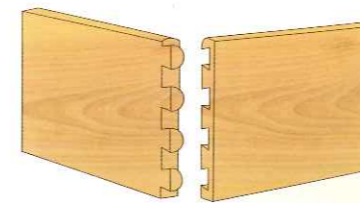

JD-75 Auto Dovetail Tenoner

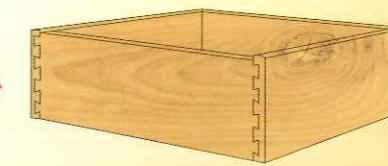

JDC-312 Pneumatic Clamp For Drawer

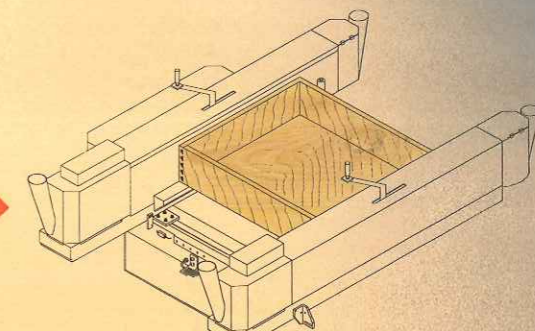

PW-12H Double End Drawer Sander

**The Most Efficient Dovetail Tenoner  
Now is Available!**



# AUTO. DOVETAIL TENONER

- Improved pneumatic control system. It allows for smooth feed and better quality cutting results.
- High speed spindle rotation, less noise, strong bearing design for long term use.
- Specialized for drawer production and furniture parts which require high quality dovetail joints.
- Spindle dust hood and safety rail bar of the machine are standard, all electrical components match CE regulations.
- High quality pneumatic components and special cast iron material ensures high stability and prevents vibration during cutting.
- Auto. continue working switches are standard, and eliminate downtime when changing workpieces.

## SPECIFICATIONS

MODEL	JD-75
Max. working width	480 mm
Max. working thickness	60 mm
Fixed dimensions of pitch	25 mm
Spindle power	2 HP
Spindle speed	20000 RPM
Number of joints per minute	15/25/35 (three speed)
N.W./G.W.	450/550 kgs
Machine size	1500 x 900 x 1210 mm
Packing size	1470 x 970 x 1400 mm

\*All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.

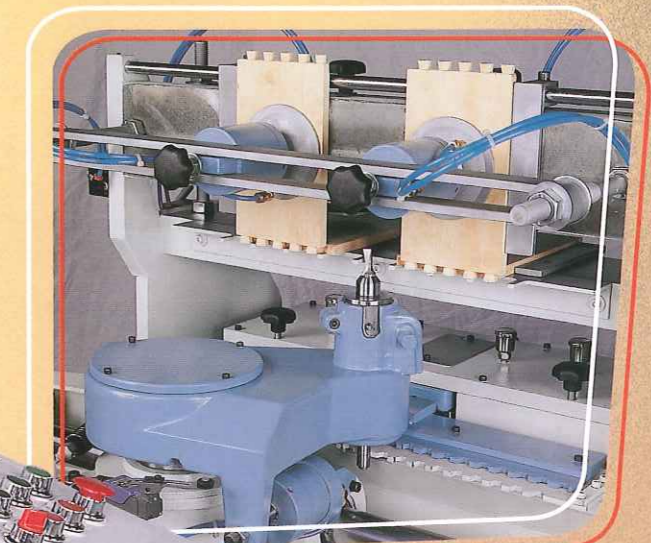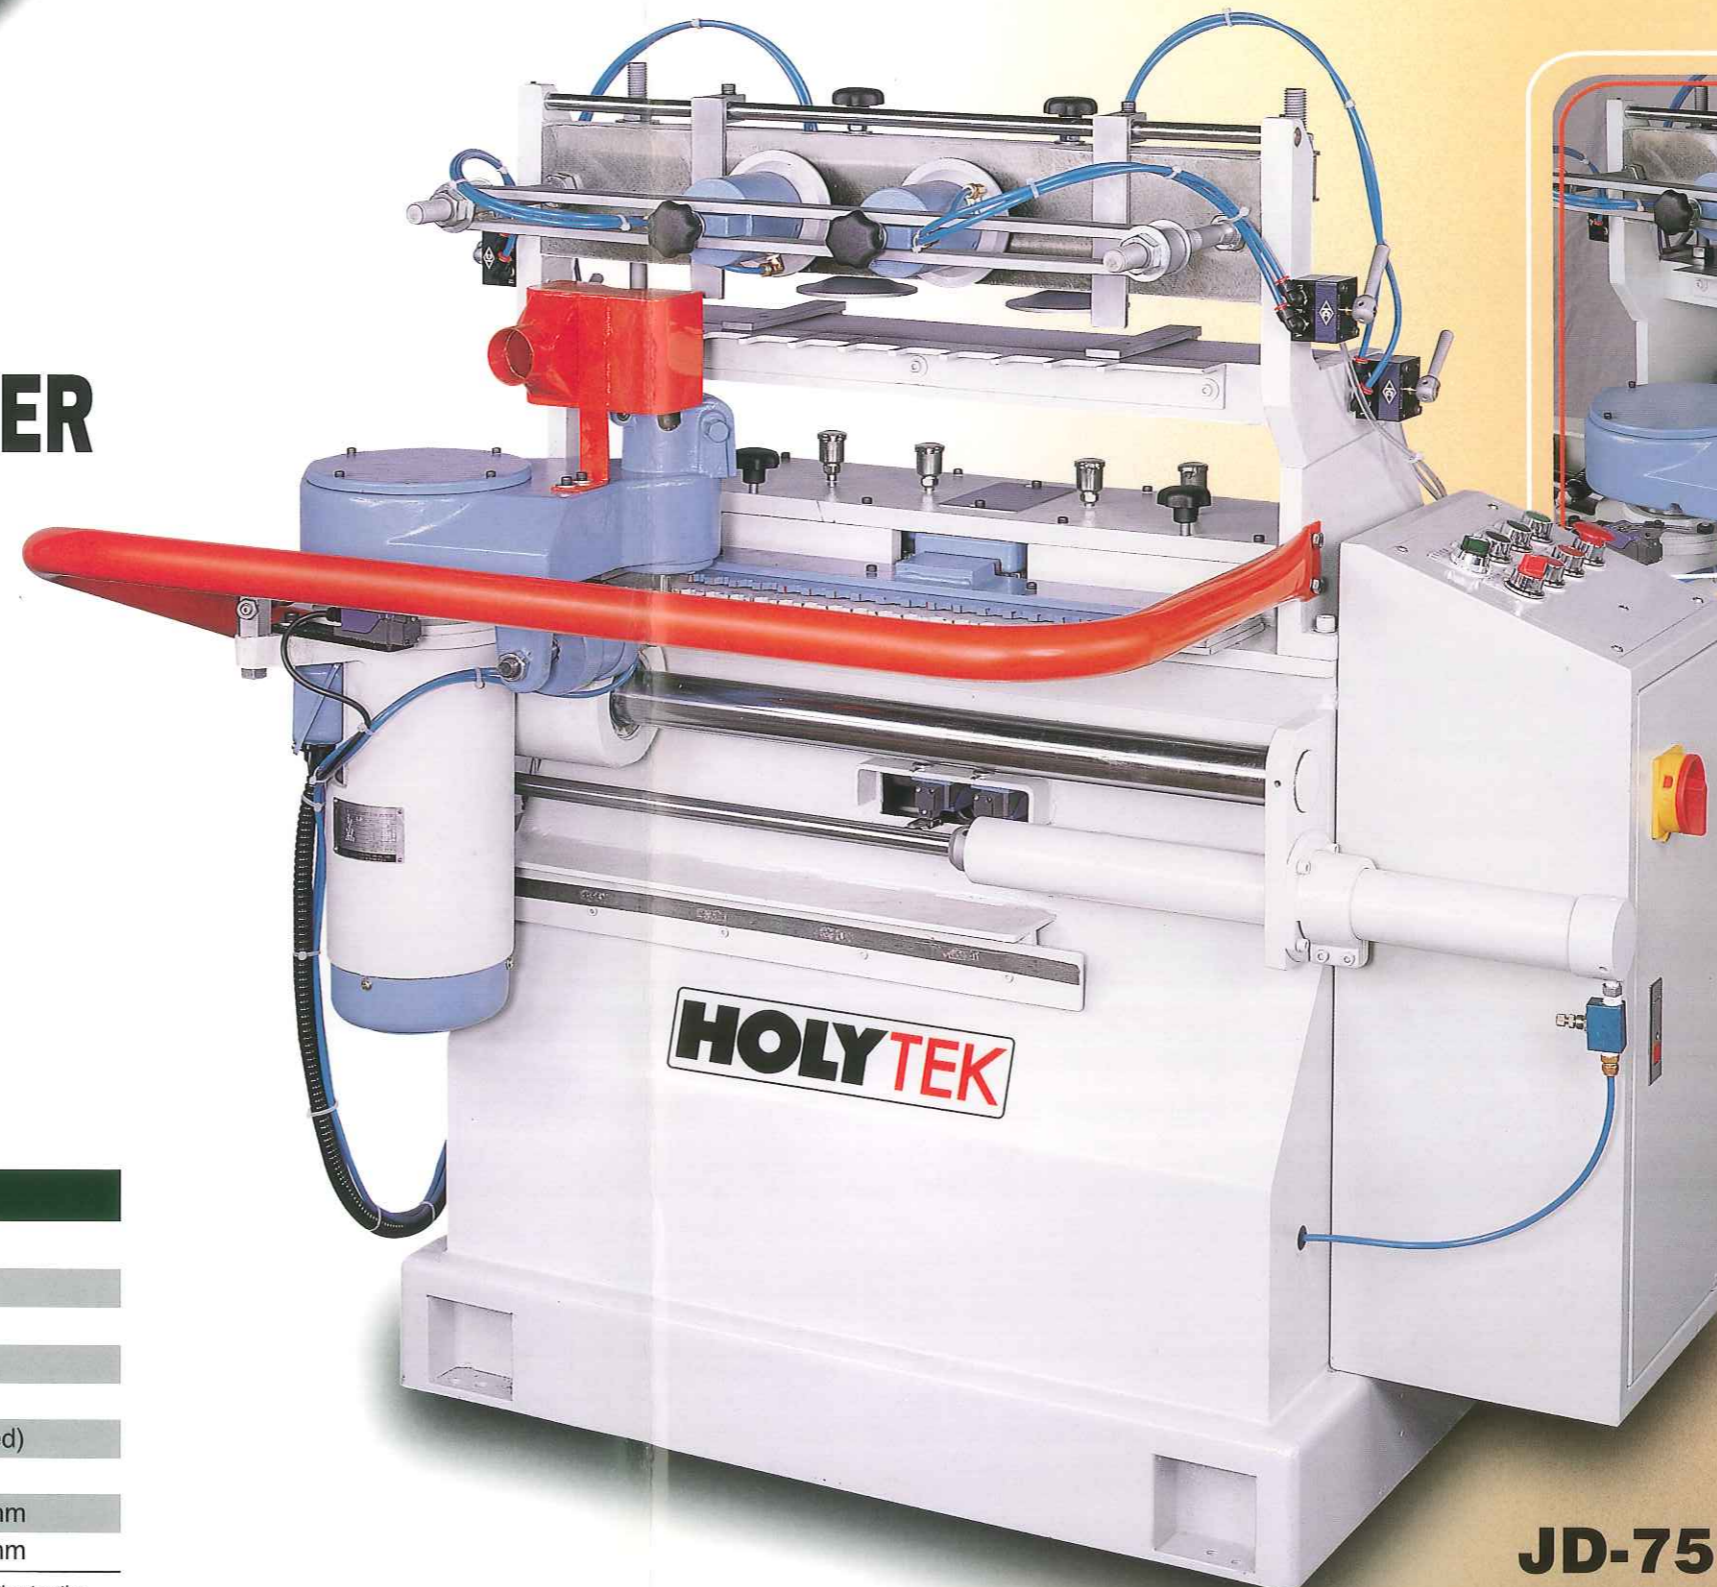

*Working example*


**JD-75**

[www.hoechsmann.com](http://www.hoechsmann.com)

## New Drawer Press With Pneumatic Clamp Reduces Your Cost Of Drawer Assembly

# PNEUMATIC CLAMP FOR DOVETAIL JOINTS

- Complete new "CLAMP" type Drawer Press suitable for all types of hardwood and softwood drawers.
- Increased productivity- each drawer assembled in under one minute.
- Very compact dimensions with easily assembled stand.
- Machine with double switch control for safety.
- Slideways are hard chrome plated for long-term use.
- Adjustable clamp pressure and clamp jaw stroke.
- Double dovetailed drawers can also be produced by one extra operation.
- The unique clamp plate design ensures that pressure is evenly applied to both sets of dovetails, creating perfect joints requiring minimum sanding.
- Individual fingertip adjustment of drawer taper is provided as standard, ensuring a symmetrical finished product tailored to the furniture manufacturer's own requirements every time.

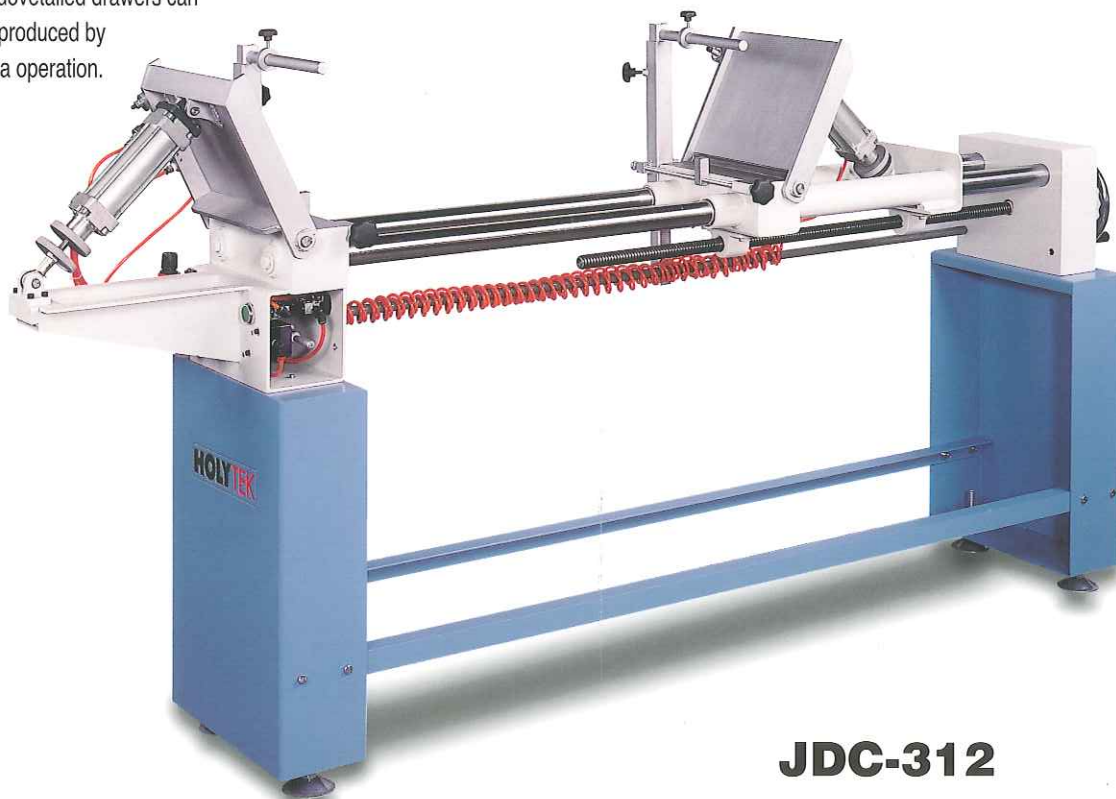

**JDC-312**

### SPECIFICATIONS

MODEL	JDC-312
Drawer width	225 - 1200mm
Drawer depth	280 - 500mm
Drawer height	100 ~ 275mm
Taper adjustment	0 ~ 5 mm/side
Machine size	2420 x 400 x 1140mm
Packing size	2360 x 480 x 650mm
N.W./G.W.	200/300 kgs
Pneumatic supply	7 bar

\*All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.

## HOLYTEK

**HOLYTEK INDUSTRIAL CORP.**

9F-I, NO. 400, SEC. I, CHANG PING RD., TAICHUNG, TAIWAN, R.O.C.

TEL: 886-4-22452818 (REP.) FAX: 886-4-22436928

E-mail: [holytek@ms13.hinet.net](mailto:holytek@ms13.hinet.net)

<http://www.holytek.com.tw>

[www.hoechsmann.com](http://www.hoechsmann.com)

CAT.NO: 2000.03.2004