


REMAXTM 500 CNC RESAW

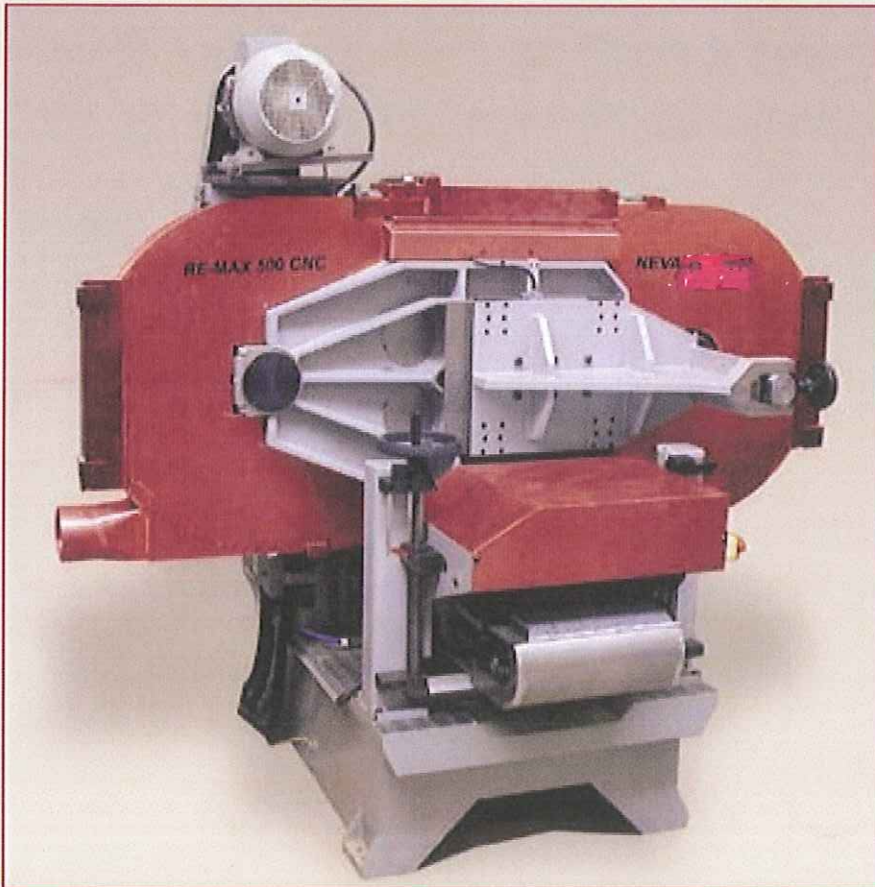

In a class by itself

Finally, a heavy-duty horizontal band saw for all your resawing applications, including flooring, windows doors, furniture and musical instruments.

Unlike other resaws, the REMAX 500 is built from solid cast iron, and incorporates a durable and effective guiding system and thin-kerf saw blades under high tension. The machine produces a smooth, glueable surface with superior tolerances.

The REMAX 500's modular construction gives your company room to grow. A single, stand-alone unit can be purchased initially; additional units can then be added in line as production requirements demand.

Put these advantages to work in your operation

- Heavy-duty, cast-iron construction—built for longevity and superior tolerances
- Thin-kerf, high-tension blades to minimize your waste
- Produces smooth, glueable surface
- Handles material to 15" wide, 6" thick
- Variable feed 10 fpm to 200 fpm





Modular design: add units for multiple cuts in a single pass



CNC touch-screen control panel for easy height adjustment of one or multiple heads

Features and specifications

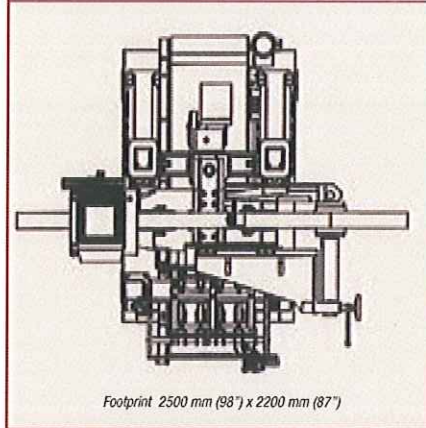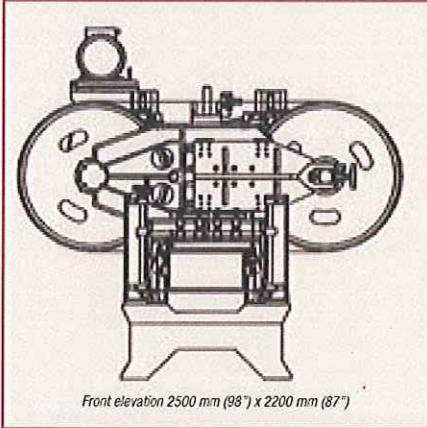

Machine dimensions

Width	2500 mm (98")
Length	2200 mm (87")
Height	2200 mm (87")
Weight	4000 kg (9000 lbs)

Detailed features

- Cutting width up to 500 mm (15")
- Feed speed from 10 to 60 m/min (35 to 200 ft/min) variable via frequency inverter
- Blade cutting speed infinitely variable depending upon type of wood and feed speed
- Infinitely adjustable saw blade tensioning
- Cast iron main frame offers sturdy construction for minimal machine vibration during production
- Air-loaded hold-down shoes prevent movement of lumber during cutting
- CNC touch-screen control panel for easy height adjustment of one or multiple heads
- Modular system can be purchased with a single sawing unit or multiple sawing units that are controlled via a central touchscreen

Technical specifications

Number of heads	1 or multiple
Machine voltage	3 phase (per customer specifications)
Main motor	15 kW to 22 kW (20 hp to 30 hp)
Feed speed	6 to 60 m/min (10 to 200 ft/min)
Pulley diameter	1000 mm (39")
Cutting width (adjustable)	500 mm (15")
Maximum cutting thickness	150 mm (6")
Minimum board length	300 mm (12")
Minimum slat thickness	2 mm (.080")
Cutting accuracy	± 0.10 mm (.004")
Saw kerf	1.0 to 1.5 mm (.040 to .055)
Saw blade life	20 to 80 hrs depending on wood and blade tooth material