


- LEVIGATRICE A NASTRO A DOPPIO COLLO D'OCA
- BELT SANDING MACHINE WITH DOUBLE GOOSE-NECK
- PONCEUSE A BANDE A DOUBLE COL DE CYGNE
- LANGSBANDSCHLEIFMASCHINE MIT DOPPEL KURBELGABEL
- LIJADORA DE BANDA

# PS 250 - 300




**SAC**  
suero

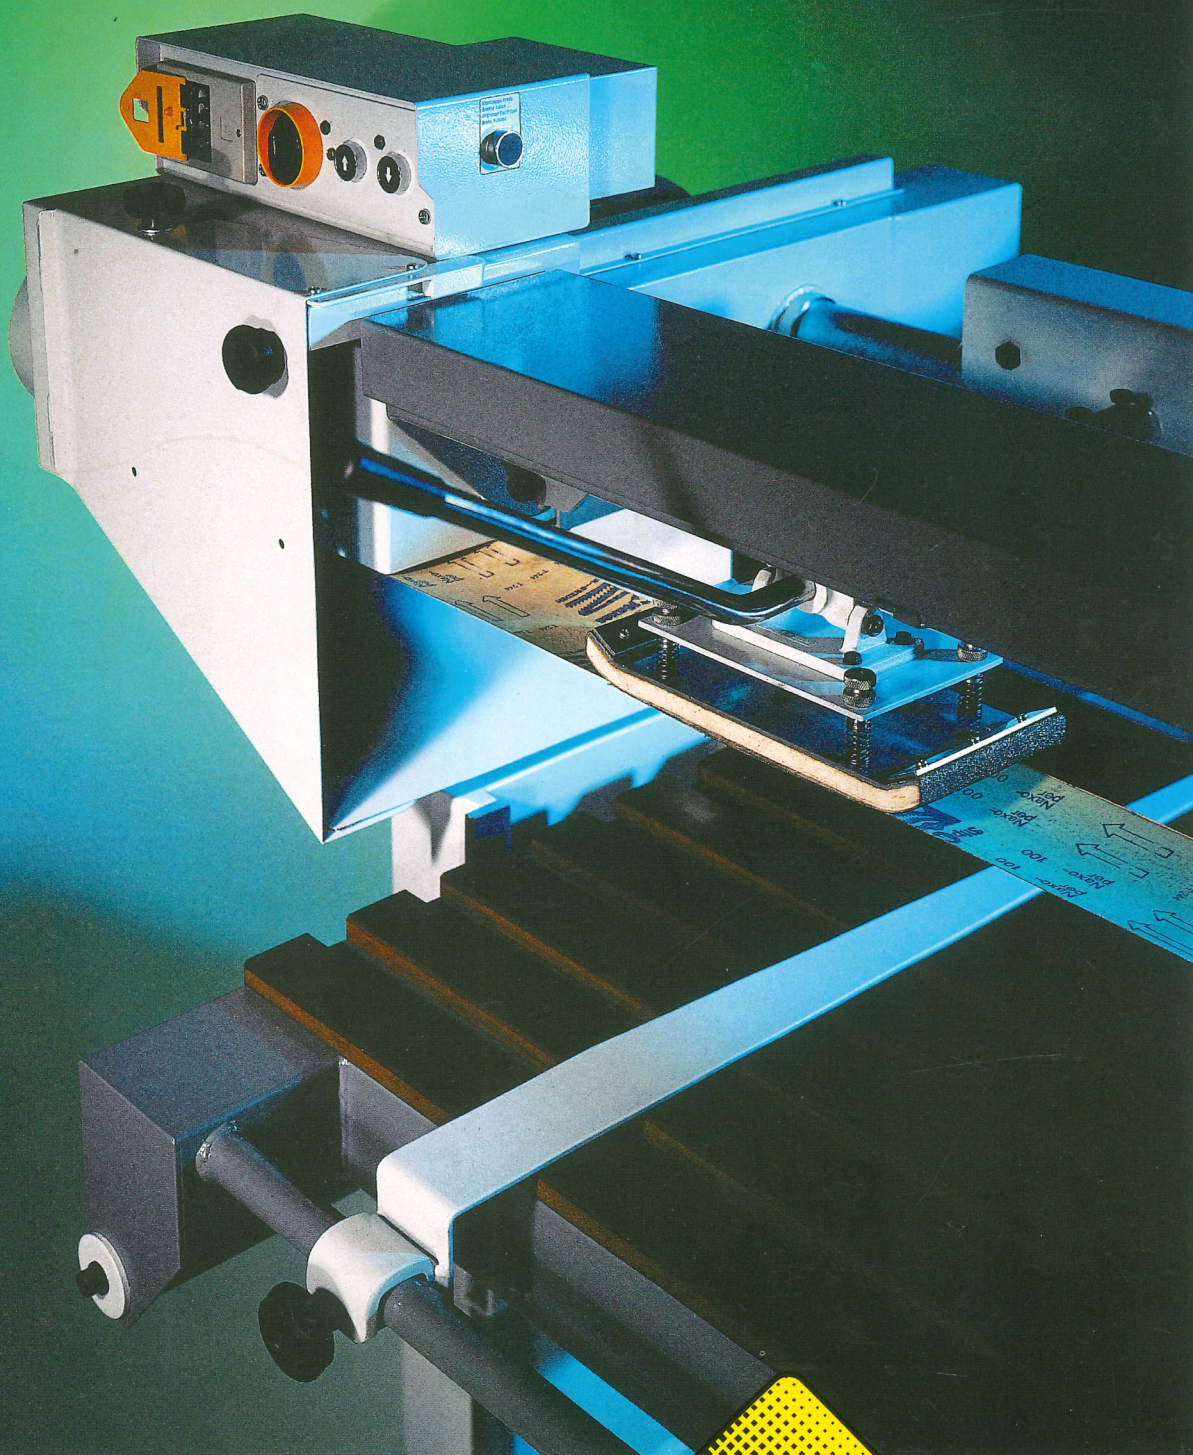

LEVIGATRICE A NASTRO A DOPPIO COLLO D'OCA  
BELT SANDING MACHINE WITH DOUBLE GOOSE-NECK  
PONCEUSE A BANDE A DOUBLE COL DE CYGNE  
LANGSBANSCHLEIFMASCHINE MIT DOPPEL KURBELGABEL  
LIJADORA DE BANDA

PS 250 - 300

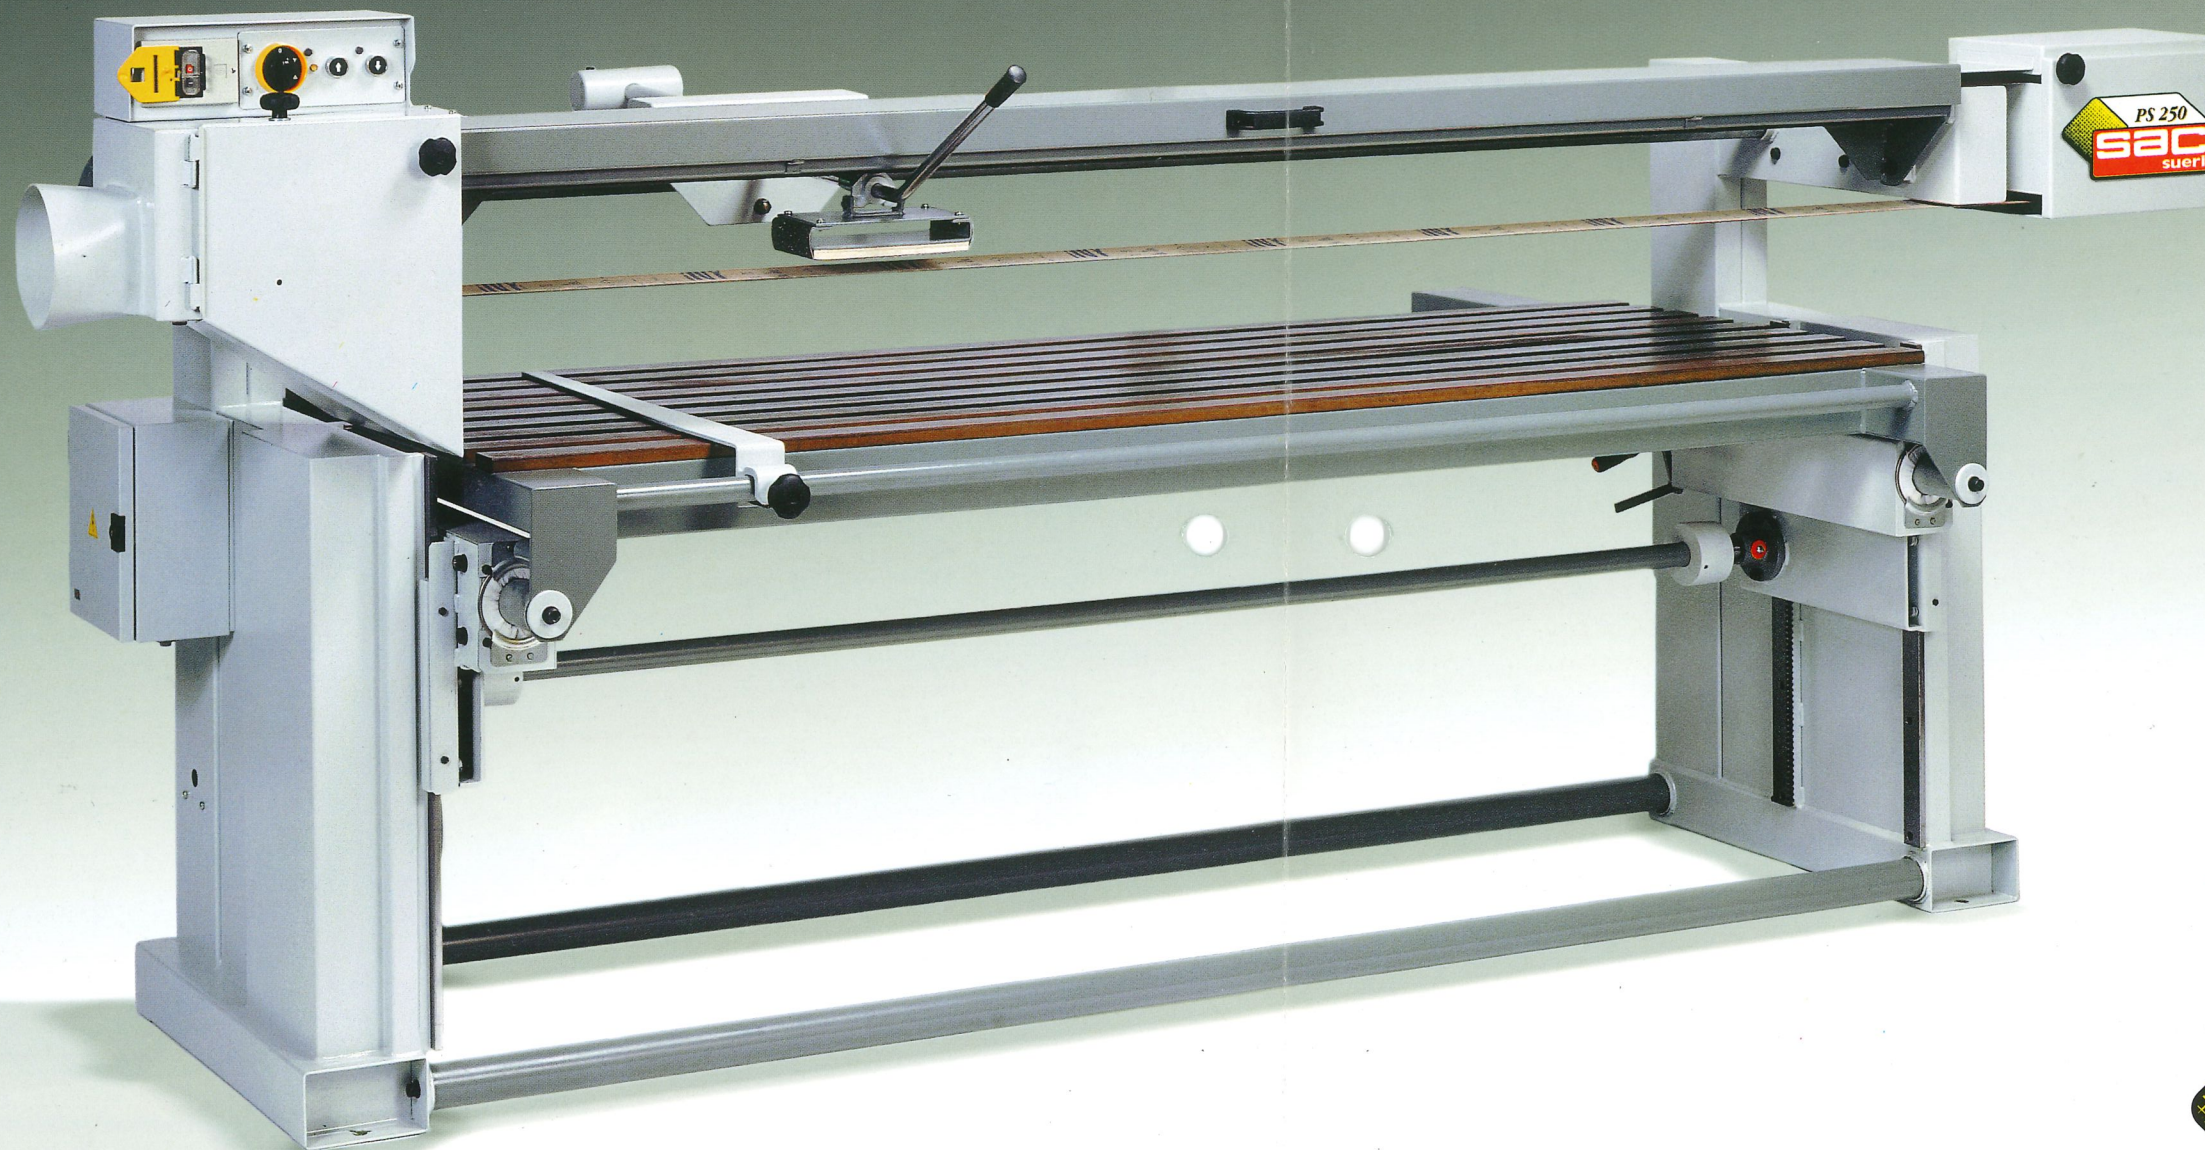



**DATI TECNICI - TECHNICAL DATA - DONNEES TECHNIQUES - TECHNISCHE DATEN - DATOS TECNICOS**

		<b>PS 250</b>	<b>PS 300</b>
Lunghezza del piano - Length of the table - Longueur de la table Tischlänge - Longitud de la mesa	mm	2400	2900
Larghezza del piano - Width of the table - Largeur de la table Tischbreite - Ancho de la mesa	mm	800	800
Spostamento verticale automatico del piano - Autom.Vertical stroke of the table - Déplacement vertical autom. de la table Automatische Tischverstellung - Desplazamiento vertical automático mesa	mm	600	600
Potenza motore principale (autofrenante) - Main motor power (Selfbraking) - Puissance du moteur principal Hauptmotor - Potencia motor principal (autofrenante)	kW	3	3
Potenza motore regolazione piano - Table adj. motor - Moteur de montée de la table Motor für Tischhöhenverstellung - Potencia motor regulación mesa	kW	0,4	0,4
Lunghezza massima del nastro - Max. lenght of sanding belt - Longueur maxi. de la bande Bandlänge - Longitud máxima de la banda	mm	6800	7800
Larghezza standard del nastro - Standard width of the sanding belt - Largeur standard de la bande Bandbreite - Ancho standard de la banda	mm	150	150
Velocità nastro - Peripheral belt speed - Vitesse de la bande Bandumlaufgeschwindigkeit - Velocidad de la banda	m/sec	29	29
Peso netto - Net weight - Poids net Netto Gewicht - Peso neto	Kg	620	670
Esecuzione conforme alla normativa CE - Execution complying with CE standards - Execution conforme aux normes CE Ausführung nach CE Vorschriften - Ejecución a normas CE			

**ACCESSORIA RICHIESTA - OPTIONAL EXTRA - ACCESSOIRES EXTRA - SONDERZUBEHÖR - ACCESORIOS OPCIONALES**

Guida sul piano - Table fence - Guide sur table Tischanschlag - Guía sobre la mesa
Tampone molleggiato - Springy pad - Patin souple Schleifschuh federnd - Patin blando
Inversione rotazione nastro - Reversing switch - Inversion de rotation Rechts und Linkslauf - Invertidor
Motore a 2 velocità - 2 speed motor - Moteur à 2 vitesses Polschaltbarer Motor - Motor a 2 velocidades

I DATI TECNICI NON SONO IMPEGNATIVI E POSSONO ESSERE VARIATI PER MIGLIORAMENTI.  
TECHNICAL DATA ARE NOT BINDING AND MAY BE ALTERED DURING CONSTRUCTION FOR IMPROVEMENTS.  
LES DONNEES CI-DESSUS NE SONT PAS OBLIGATOIRES ET PEUVENT ETRE VARIEES POUR DES AMELIORATIONS.  
TECHNISCHE DATEN UND ABBILDUNGEN SIND UNVERBINDLICH.  
CON DERECHO DE APORTAR PERFECCIONAMIENTOS TECNICOS.



**SUERI ALFREDO SpA**  
Costruzione Macchine per Legno

41010 LIMIDI DI SOLIERA (MO) ITALY  
Via Carpi - Ravarino, 115  
Tel. 059 / 56.17.50 - Fax 059 / 56.50.52  
E-MAIL : sac@sacsueri.com  
<http://www.sacsueri.com>