









serie FM 3T

FORATRICE SEMIAUTOMATICA
SEMI-AUTOMATIC BORIN MACHINE
HALBAUTOMATISCHE BOHRMASCHINE
PERCEUSE SEMI-AUTOMATIQUE
TALADRO SEMIAUTOMÁTICO
FURADORA SEMI-AUTOMATICA



 **STETON**

Interasse mandrini Centre distance between spindles Spindelabstand Entre-axe entre chaque broche Interejes mandriles Distancia entre brocas	32mm.	Spessore massimo pannelli Max. thickness of panels Max. Zwischenlageholzplatte Max. épaisseur des panneaux Altura maxima paneles Dimensao max de peça a furar	80mm.	Profondità massima di foratura Max. boring depth Max. Bohrköpfen Max. profondeur de perçage Profundidad maxima del taladrado Profundidad e max de furação	70mm.
Potenza totale motori Total motor power Motor Bohrköpfen (3) Puissance totale des moteurs Potencia total de los motores Potencia do motor	Hp. 1,5	Velocità rotazione mandrini Speed of spindles Spindeldrehzal Vitesse de rotation des broches Velocidad de revoluciones de los mandriles Velocidade de rotação	2800 rpm	Peso Net weight Gewicht Poids Peso Peso	750 kg.
Dimensioni d'ingombro Overall dimensions Gesamfabmessungen Dimension totales Medidas exteriores Dimensoes	1900X1200 X1300	Gruppo orizzontale mandrini Horizontal boring group spindles Horizontal Bohrkopf Spindeln Groupes horizontales mandrins Grupo horizontal mandrins Grupo horizontal mandrini	21		
Gruppi verticali mandrini Vertical boring group spindles Vertikal Bohrkopf Spindeln Groupes horizontales mandrins Grupos verticales mandrins Grupos verticoes mandrini	17+17 (21+21)	Distancia max. tra le teste Max. distance between the heads Max. arbeits breite zwischen den vertikal kopfen Largeur max. entre les testes verticales Distancia maxima entre los cabezales Distancia max entre os cabeçotes		850mm.	
Distanza min. tra le teste Min.distance between the heads Min arbeits breite zwischen den vertikal kopfen Largeur min. entre les testes verticales Distancia minima entre los cabezales Distanci min. entre os cabeçotes		150mm.			

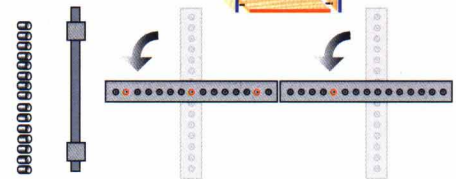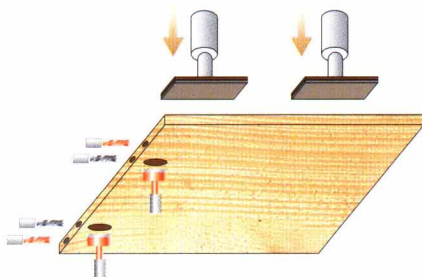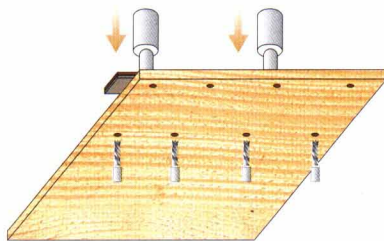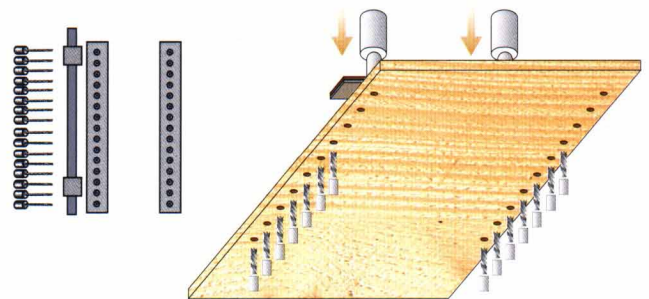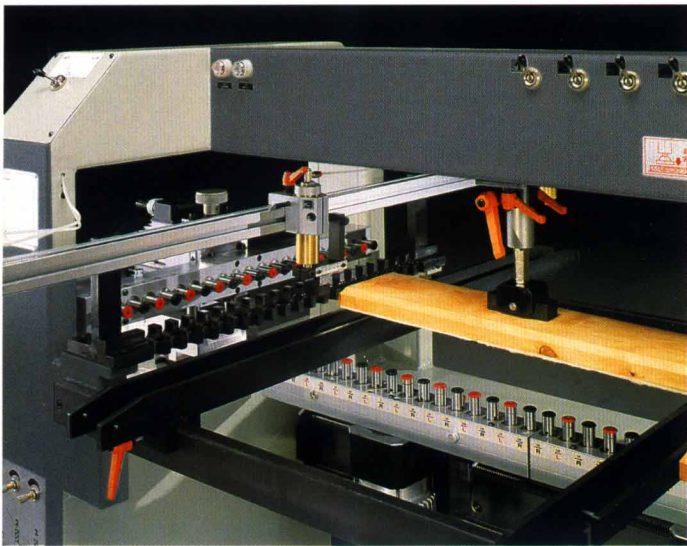

STETON S.p.A. - 41012 CARPI (MO) - ITALY
 TEL. 059.686.771 - FAX 059.681.774
 E-mail internet : steton@steton.it
 www internet address: http://www.steton.it

