


*Perfect Sanding*

# UniSander

2.4.0. K + 2.4.0. K + 1.2.0.

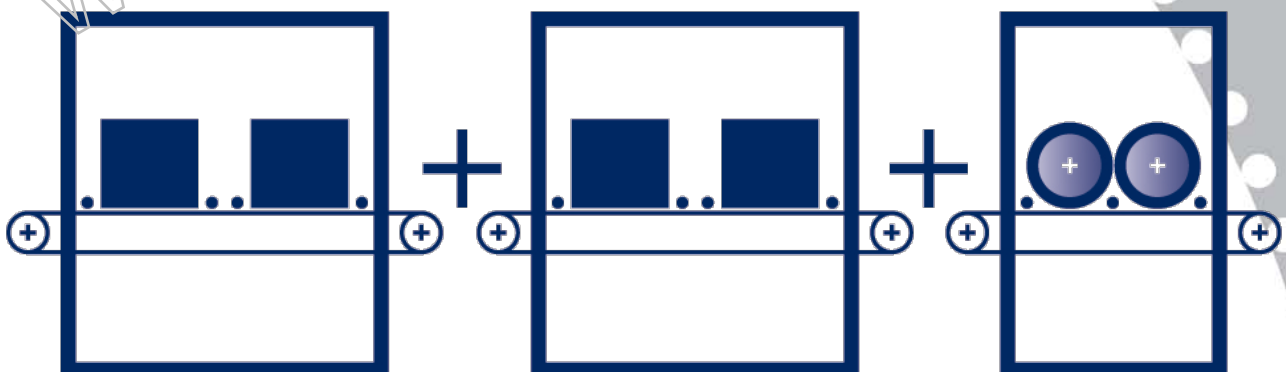

*UniSanding*

# UniSander

## Perfect Sanding

2.4.0. K + 2.4.0. K + 1.2.0.

**4 Sanding heads:** 2 running with /  
2 running against

**4 Sanding heads:** 2 running with /  
2 running against

**2 Sanding heads:** 1 running with /  
1 running against

**Feed rate:** 15 - 40 meter / min.

**Speed sanding heads:** 50 – 450 Rpm

**Operation side:** Right / Left

**Voltage:** 3 \* 400 V, 50 Hz +N+PE

**Safety:** 64 A

**Sucking out:** 4000 m<sup>3</sup>/hour – 25 m/sec

**Prepared for line installation.**

### Item size:

Length: min 100 mm

Height: min 5 mm - max 150 mm

Width: 1300 mm up to 2100 mm

**The vacuum table can fix 100 x 100 mm**

### Dimension of the machine:

Length: 6055mm

Height: 2000 mm

Width: 2000 mm

### Turbo Blower + Cleaning brushes

Roller table with pressure rollers

Vacuum table with pressure rollers

Vacuum table without pressure rollers

Super grip belt with pressure rollers

**Color:** RAL 7035

### Use:

- Cross and longitudinal sanding.
- 100 % profile sanding.
- High line speed.

Finish sanding – All types of materials.

Lacquer sanding – All types of lacquer  
/ primer

Partners & Customers

Production/analysis

Product/analysis

Experience/test

Cross Line  
Cooperations

Flexible  
solutions

Sale

Service

Training

Support

## UniSanding

Always the best solutions



UniSanding A/S • Gemsevej 11 • DK-7800 Skive  
www.unisanding.com • info@unisanding.com  
T: +45 96 14 28 00