
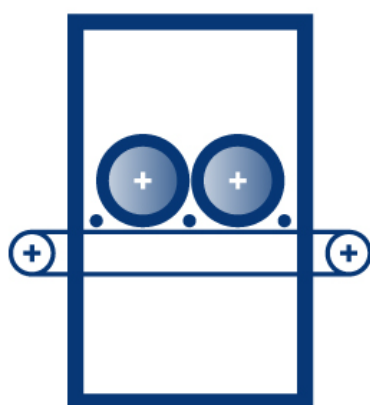


Perfect Sanding

UniSander

1.2.0. 0 - 5°

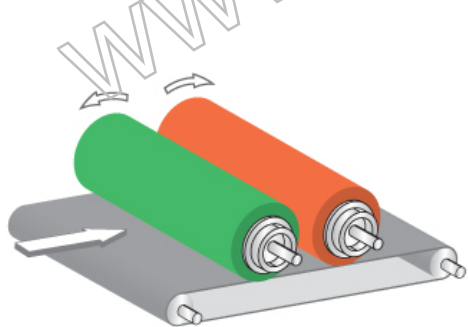

UniSanding

UniSander

1.2.0.

2 Sanding heads: 1 running with /

1 running against

Feed speed: 3 – 12 meter / min.

Speed sanding heads: 50 – 450 Rpm

Operation side: Right / Left

Voltage: 3 * 400 V, 50 Hz +N+PE

Safety: 32 A

Sucking out: 2000 m³/hour – 25 m/sec

Prepared for line installation

Item size:

Length: min 100 mm

Height: min 5 mm - max 150 mm

Width: 1300 mm up to 2100 mm

The vacuum table can fix 100 x 100 mm

Dimension of the machine:

Length: 1685 mm

Height: 2000 mm

Width: 2000 mm

Turbo Blower + Cleaning brushes

Roller table with pressure rollers

Vacuum table with pressure rollers

Vacuum table without pressure rollers

Super grip belt with pressure rollers

Color: RAL 7035

Use:

Surface sanding.

Finish wood sanding – All types of materials.

Lacquer sanding – All types of lacquer / primer.

Perfect Sanding

Partners & Customers

Production/analysis

Product/analysis

Experience/test

Cross Line
Cooperations

Flexible
solutions

Sale

Service

Training

Support

UniSanding

Always the best solutions



UniSanding A/S • Gemsevej 11 • DK-7800 Skive
www.unisanding.com • info@unisanding.com
T: +45 96 14 28 00