

S2

calibrating sanding machine



When competitiveness
means being able
to satisfy every
demand



Made **In** Biesse

The market demands

the ability to **handle orders** of different sizes and types, with **guaranteed delivery times and high quality standards**.

Viet responds

with **technological solutions** that can be customised according to manufacturing requirements, delivering superb product quality and increased productivity.

S2 is the calibrating sanding machine that offers superior levels of performance with a modest investment. Ideal for small and medium-sized businesses, the S2 ensures maximum reliability and precision, derived from the experience gleaned from higher-end machines.

- ✓ **Exceptional finish quality.**
- ✓ **Enormous versatility and flexibility of use on a single machine.**
- ✓ **Excellent results guaranteed in a single step.**

Numerous machining operations on a single machine



S2

calibrating sanding machine



S2

Exceptional finish quality

The robust and stable structure of the S2 ensures precision and reliability.



The **base** has a one-piece frame in welded steel. The generous thickness of the materials used guarantees the stability and durability of the entire structure.



S2 is equipped with a **thick, wear-resistant stainless steel work table** that guarantees precision and sturdiness during any type of machining operation. In the mobile head version (optional), the work table is positioned at 900 mm from the ground, thus ensuring ease of panel loading and unloading.



Pad



Roller




Compact cross unit



Combined

Reduced machining times due to the possibility of achieving a number of results in a single step.

Can be customised in accordance with customer requirements

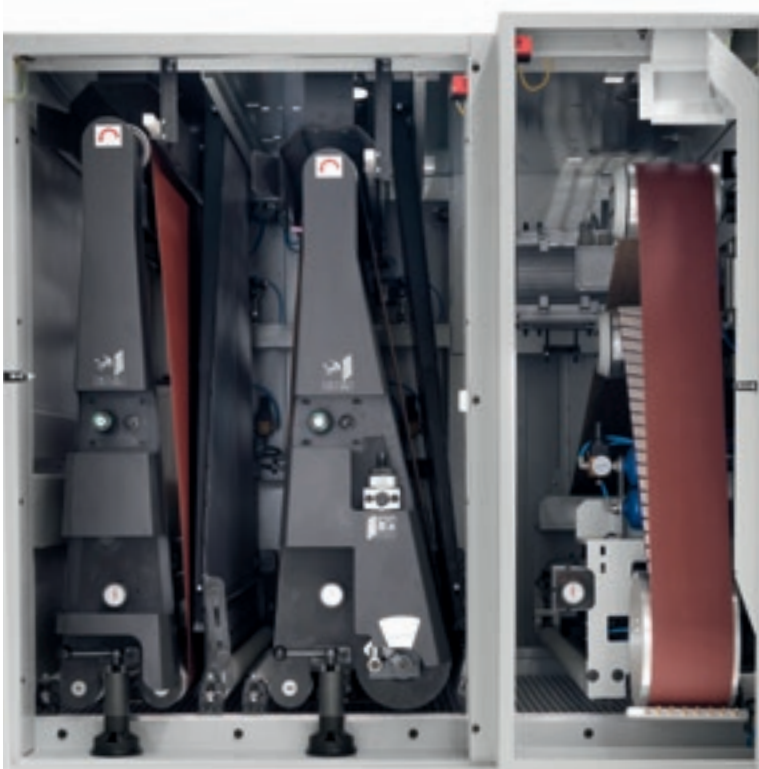

S2 is the calibrating sanding machine that can accommodate up to 3 working units, ensuring high finish quality across all products and superb machining flexibility.



Transverse version, combined, pad.



Roller version, roller, pad.

Excellent results in a single step

The possibility of combining rollers of different hardnesses with one or more pads allows the customer to calibrate and smooth the article in a single step.



The **Roller unit** is extremely precise and effective. Depending on the hardness of the rubber used and the roller's cross-section, the unit can be used to calibrate, sand or finish.

Available cross-section sizes:



190 mm
240 mm
300 mm

For calibration operations, the machine can be equipped with 190 or 240 mm cross-section 90 Sh steel or rubber rollers, fitted with 25 Hp motors.



Braking system

Viet uses disc brakes with floating callipers for every motor installed. This motorcycle-derived system guarantees speed and safety.




The large tensioning roller allows for perfect belt translations in all working conditions.

High-technology to enhance machine performance

The S2 is built using the same technology implemented on higher-range machines. Optimal quality, less waste and significant cost reduction.

The **sectioned electronic pad** enables users to perform high-quality sanding operations thanks to the electro-pneumatic sectors that are only actioned on the panel's surface. The vast range of possible adjustments offers specific functionalities for different types of processing operations.



The **electronic pad equipped with HP (High Performance) technology** enhances processing results, both as far as surface flatness and finish are concerned.

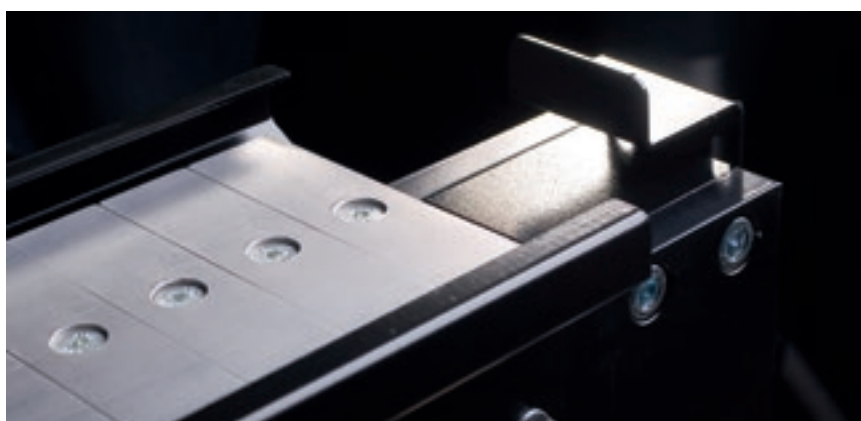

- ✓ +30% greater belt life expectancy.
- ✓ -30% consumption of electricity.
- ✓ Higher finish grade.
- ✓ Even surfaces.
- ✓ -20% dust.
- ✓ No excessive sanding.

Save corner.

All electric pads, with IPC controls, are fitted with the exclusive, patented Save corner function. The system limits the sanding time on the corners of the panel, thus preserving the most delicate portions of the panel's surface.

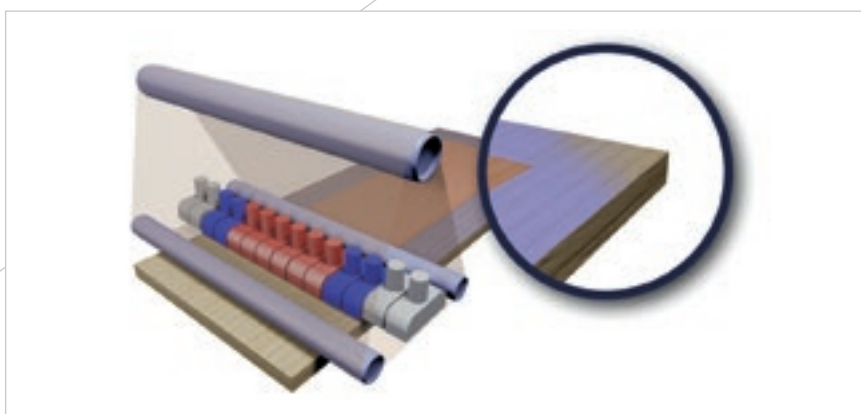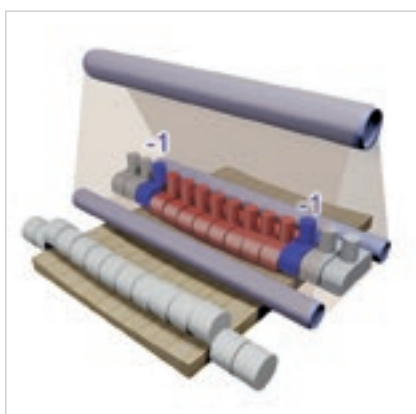


Fine surface finishing and polishing for all types of application

Technological solutions designed for complex machining operations.



The **compact cross unit** is the ideal solution for complex machining operations on veneered panels, even with glues and junction papers, responding to transverse levelling and finish requirements, whilst occupying a small footprint. The S2 is the best solution for performing complex manual operations that are typical of artisan production.

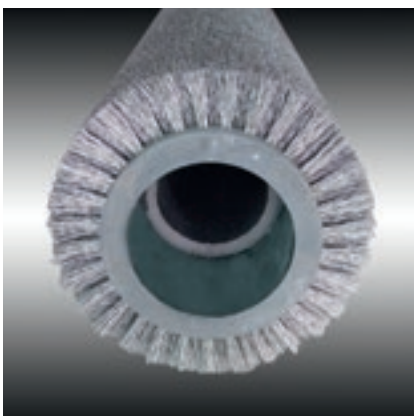

The **brushing unit** enables the customer to highlight the wood grain of processed panels.




The **brushing unit with abrasive inserts** can be equipped with a transverse oscillation system, to ensure that the finish quality of the product is entirely uniform. Abrasive bristles can be replaced quickly and without the need of removing the unit from the machine.



Scotch brite

The scotch brite unit is suitable for adding a satin finish to the panels after the smoothing cycle. It provides a uniform finish, using open-pore cycles.

Optimal panel cleaning with a great price/ performance ratio

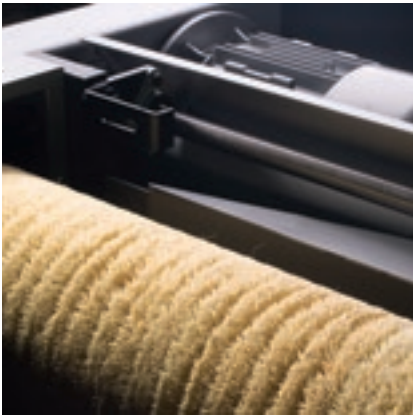

The **panel cleaning brush** can be fitted with bristles of different materials to deep clean the machined panels.



The **anti-static bar** eliminates electrostatic charges on painted panels.



The **rotating blower**, positioned downstream of the machine, enables optimal cleaning of the panel's surface at the end of the sanding cycle.

The **linear blower** is used to finish cleaning the panel's edges. Ideally, it should be coupled with the rotating blower.

Eco-friendly smoothing

A close-up photograph of a hand wearing a white nitrile glove. The hand is holding a bright green, three-dimensional letter 'E' on a light-colored wooden surface. Several other wooden letters, including 'E', 'A', and 'H', are scattered around. A diagonal white line runs across the image from the top left to the bottom right, separating the title text from the main image.

The Energy Saving System is a series of devices designed by Viet to minimise energy consumption during machining. They are engineered and designed to ensure a high degree of efficiency, as well as optimising production, with effective suction thanks to the automatic opening of the collectors, in accordance with the units in operation; in addition, an automatic system stops machines and places them on standby after a pre-determined period of inactivity, and the vacuum table system, which operates by means of an inverter, optimizes the vacuum for holding the panel, according to the size of the panel being processed.



With every attention to saving energy, the Viet range of machines includes the E.S.S. system, which allows for energy savings of up to 30% with regard to both electricity consumption and CO2 emissions. A perfect combination of Biesse technology and Italian genius.

Service & Parts

Direct, seamless co-ordination of service requests between Service and Parts.
Support for Key Customers by dedicated Biesse personnel, either in-house and/or at the customer's site.

Biesse Service

- ✓ Machine and system installation and commissioning.
- ✓ Training centre dedicated to Biesse Field engineers, subsidiary and dealer personnel; client training directly at client's site.
- ✓ Overhaul, upgrade, repair and maintenance.
- ✓ Remote troubleshooting and diagnostics.
- ✓ Software upgrade.

500 / Biesse Field engineers in Italy and worldwide.

50 / Biesse engineers manning a Teleservice Centre.

550 / Certified Dealer engineers.

120 / Training courses in a variety of languages every year.

The Biesse Group promotes, nurtures and develops close and constructive relationships with customers in order to better understand their needs and improve its products and after-sales service through two dedicated areas: Biesse Service and Biesse Parts.

With its global network and highly specialised team, it offers technical service and machine/component spares anywhere in the world on-site and 24/7 on-line.



Biesse Parts

- ✓ Original Biesse spares and spare kits customised for different machine models.
- ✓ Spare part identification support.
- ✓ Offices of DHL, UPS and GLS logistics partners located within the Biesse spare part warehouse, with multiple daily pick-ups.
- ✓ Order fulfilment time optimised thanks to a global distribution network with de-localised, automated warehouses.

87% / of downtime machine orders fulfilled within 24 hours.

95% / of orders delivered in full on time.

100 / spare part staff in Italy and worldwide.

500 / orders processed every day.

Ease of use and power

IPC is a range of **control systems** (optional) that are integrated into the machine via 8" or 15" Touch Screen monitors. This control system supports the management of all machine parameters, providing the operator with timely and intuitive information. The industrial PC processor provides control and feedback information to the machine in real time, making it extremely user-friendly for the operator.



The IPC system is the highest expression of sanding machine management technology available on the market.



Sectioned pad management.




Alarm checks.



Belt wear.

Technical specifications

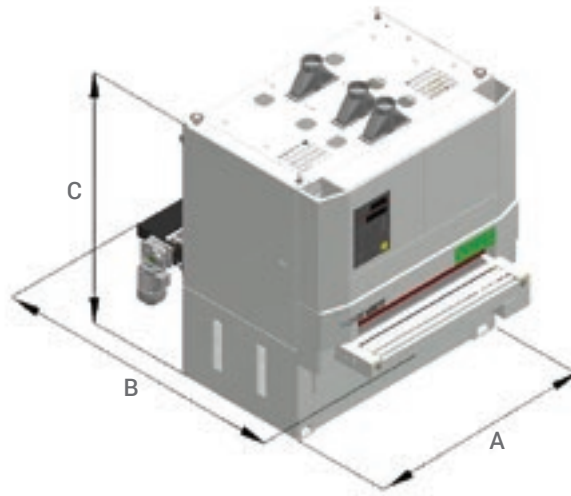

		S2 (1100)	S2 (1350)
A	mm	1760	2010
B	mm	2870	2870
C max (2200 production)	mm	2235	2235
C max (2620 production)	mm	2445	2445
Maximum operating width	mm	1100	1350
Min-max processing thickness	mm	3 - 160	3 - 160
Dimensions of sanding belts (2200 production)	mm	1130 x 2200	1380 x 2200
Dimensions of sanding belts (2620 production)	mm	1130 x 2620	1380 x 2620
Cross-sanding belt dimensions	mm	150 x 5520	150 x 5520
Advance speed	m/min	3 - 16	3 - 16
Operating pressure	bar	6	6
Weight	Kg	2880	3020
Motor power of up to	kW	18.5	18.5

The technical specifications and drawings are non-binding. Some photos may show machines equipped with optional features. Biesse Spa reserves the right to carry out modifications without prior notice.

A-weighted surface sound pressure level (Lp_{fA}) during machining for operator workstation on vane-pump machine Lp_{fA}=76dB(A) Lw_A=95dB(A). A-weighted sound pressure level (Lp_{fA}) for operator workstation and sound power level (Lw_A) during machining on cam-pump machine Lw_A=76dB(A) Lw_A=95dB(A). K measurement uncertainty dB(A) 5

The measurement was carried out in compliance with UNI EN 848-3:2007, UNI EN ISO 3746: 2009 (sound power) and UNI EN ISO 11202: 2009 (sound pressure levels at workstation) during panel machining. The noise levels shown are emission levels and do not necessarily correspond to safe operation levels. Despite the fact that there is a relationship between emission and exposure levels, this may not be used in a reliable manner to establish whether further measures need to be taken. The factors determining the exposure level for the workforce include length of exposure, work environment characteristics, other sources of dust and noise, etc. i.e. the number of other adjoining machines and processes. At any rate, the above information will enable the operator to better evaluate dangers and risks.

Made **With** Biesse

Craftsmanship and cutting-edge technology to make the sweet music of success.

Over 80,000 instruments installed in over 80 countries for Allen Organ, the largest organ manufacturer in the world. Headquartered in Macungie, PA, in the USA, and founded by Jerome Markowitz in 1937, Allen Organ boasts 200 employees and manufacturing facilities with a surface of 225,000 m². "Allen" states Dan Hummel, Manufacturing Director, "has a high degree of vertical integration, which requires the company to have the utmost quality control and the flexibility to make changes in relatively quick time scales, depending on customer needs. We have some very peculiar requirements as far as production and planning of creative

solutions are concerned. Our customers demand both customised products and classic organs that are standard stock items. However, even standard organs are often modified to respond to specific needs". Allen organs are built by combining veneered panels with solid wood. "Everybody works very closely with suppliers to guarantee the best quality solid woods and panels", adds Hummel. The raw material is processed using high-tech machinery during the various production phases, to get to the end product. During the last step, the processed wood is sanded using a Biesse finishing centre. The touch-screen op-

erated sanding centre has a combined roller/roller and sectioned pad unit for the sanding of veneered panels and solid wood.

Source: Custom Woodworking Business Jan. 2013 Woodworking Network/Vance Publications.

Allen Organ is the leader in the manufacturing of superior-quality digital organs and similar instruments. Quality, craftsmanship and cutting-edge technology.



<http://www.allenorgan.com>



Biesse Group

In

1 industrial group, 4 divisions
and 8 production sites.

How

€ 14 million p/a in R&D and 200 patents registered.

Where

34 branches and 300 agents/selected dealers.

With

customers in 120 countries (manufacturers of furniture,
design items and door/window frames, producers of ele-
ments for the building, nautical and aerospace industries).

We

3,200 employees throughout the world.

Biesse Group is a multinational leader in the
technology for processing wood, glass, stone, plastic
and metal.

Founded in Pesaro in 1969, by Giancarlo Selci, the
company has been listed on the Stock Exchange
(STAR segment) since June 2001.

 **BIESSEGROUP**

 **BIESSE**

 **INTERMAC**

 **DIAMUT**

MECHATRONICS

