


Wadkin
Bursgreen

BER 4 150 Spindle Moulder



- Accurate
- Robust
- Quickly Set-up

- Safe
- High Output
- Reliable

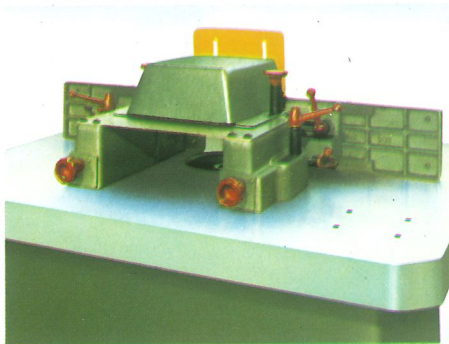


The Fence

The fence made of ground metal for maximum life is very easily adjusted and has a micro setting for speedy accurate set-ups. Guards and dust chute are provided as standard. (Extraction removed for clarity).




The Worktable

The large worktable with ground surface and four quickly removable rings supports timber over the full range of cutter sizes (up to 340 mm) ensuring a good finish on all jobs, large or small.

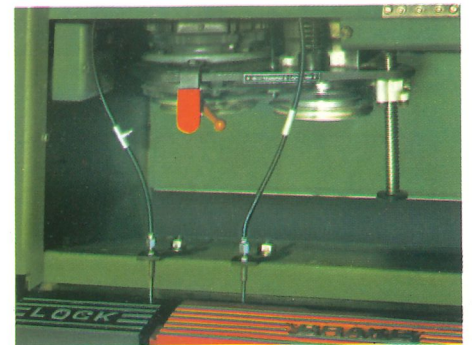


Speed changes and lubrication


Speed changes are simple and quick, a single lever slackening or tensioning the belt. Lubrication points are very accessible being grouped together on a small panel for speed and convenience.

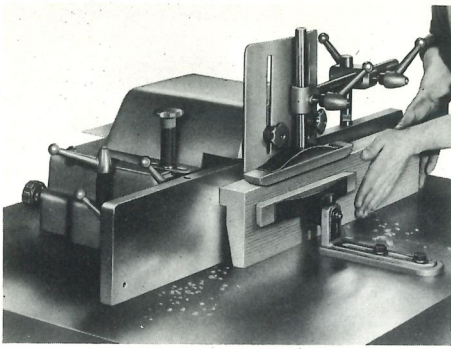


Deep Rail Moulding

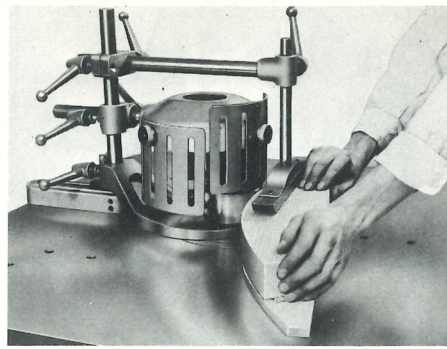


***Moulding Curved Surfaces**

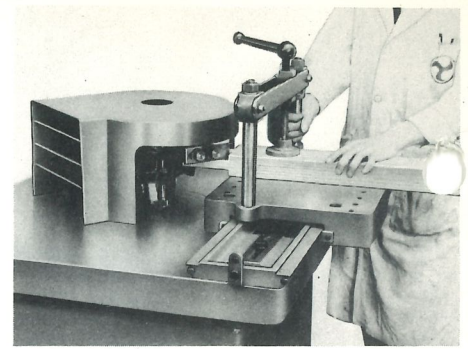


***Tenoning**

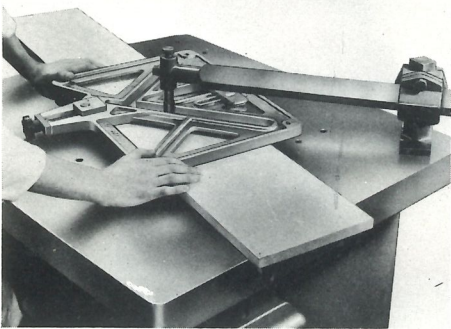

***Stair Housing**

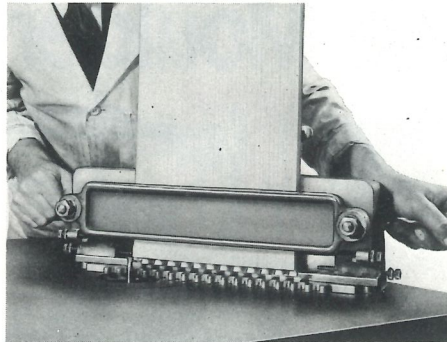

***Dovetailing**

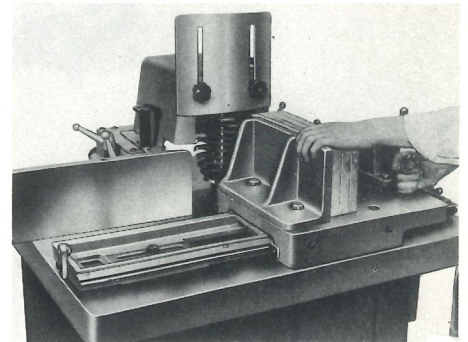


***Corner Locking**

***2 Wing Solid Profile Cutters**
Inexpensive and can be quickly changed. Can be supplied to the profiles shown.

Clearly Marked Controls
Fitted to the front panel for convenience and ease of operation. The spindle lock and brake are operated by foot pedals enabling the

operator to use both hands when changing cutters. Both the brake and spindle lock are electrically interlocked to the starter for maximum safety.

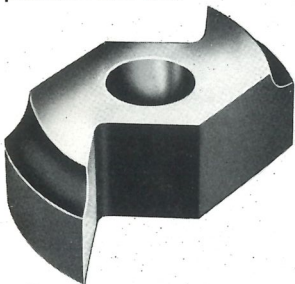

No. 2 1 1/2 in square edge cutter



No. 8 3/8 in tonguing cutter



No. 9 3/8 in grooving cutter



No. 13 Reversible glue joint cutter



No. 19 5/8 in radius ovolo cutter



No. 22 1/2 in diameter nosing cutter



No. 23 7/8 in diameter nosing cutter



No. 24 1 in diameter nosing cutter



No. 31 1/2 in radius cutter



No. 36 3/8 in radius ogee cutter



No. 42 45° angle cutter



No. 43 30° angle cutter



No. 51 Table edge cutter

Specification

Diameter of top piece 35mm
Optional diameters of top piece 30mm or 1 1/4 in
Table size 900 x 1100mm 36 x 43 in
Spindle speeds 3000, 4500, 6000, and 8000 rev/min or 3000, 4500, 6000, and 10000 rev/min

Spindle rise and fall 150mm 6 in
Table Height 855mm 33 3/4 in

Four circular table plates giving openings of

80, 150, 190, 260 31/4, 6, 7 1/2, 10 1/4, 340 x 50mm deep 13 1/2 in x 2 in deer and 355 x 10mm deep and 14 in x 5/8 in deep

Size of fence plates 150 x 400mm
Output of motor 5.5kW (7.5kW optional) 7 1/2 hp (10 hp optional)

Speed of motor, 50Hz 3000 rev/min
Speed of motor, 60Hz 3600 rev/min
Floor space 900 x 1100mm 36 x 43 in

Approximate net weight 405kg 890 lb
Approximate gross weight 445kg 980 lb
Approximate shipping dimensions 1,00m³ 35ft³

*Optional extras



SALES

WADKIN LTD.

Green Lane Works, Leicester LE5 4PF, England
Telephone: 0533 769111 Telex: 34646 (Wadkin G)
Telegrams & Cables: Woodworker, Leicester, Telex

Also York House, Empire Way, Wembley, Middx. HA9 0PA
Telephone: 01-902 7714 (3 lines) Telex: 262210

SERVICE

BURSGREEN (DURHAM) LTD

Fence Houses, Houghton-le-Spring, Tyne and Wear DH4 5RQ.
Telephone: (038 579) 2385. Telex: 53441

As our policy is constantly to improve the design of Bursgreen woodworking machinery, the details given in this leaflet are not to be regarded as binding.