

# **Edge banding machine** NKR 210 - 210 F









Perfect cut and high operating life due to diamond tipped tools for an optimum edge joint quality.





Gluing unit & magazine





Trimming unit



Profile scraping unit



Buffing unit

Buffing unit to polish edges and maintain their natural colour.









## Perfect edges for demanding customers Significant competitive advantages - Pace setting performance and quality














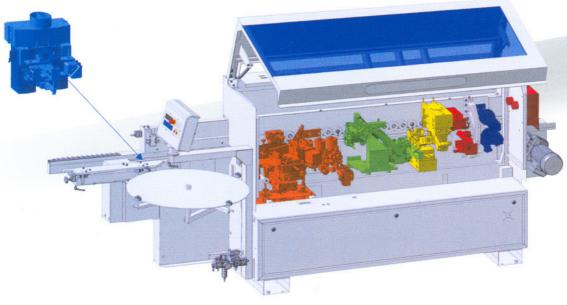

### **Technical Data**

**NKR 210** NKR 210 F

Type of machine	NKR 210	NKR 210 F
	Machine dimensions	
Machine length (mm)	3650	
Working height (mm)	950	
Machine dimensions WxH(mm)	1300x2180	
Joint Trimming	NO	YES
	Working dimensions	
Workpiece thickness (mm)	8-50	
Edge material thickness (mm)	0,4 - 3	
	Miscellaneous	
Feed speed (m/min)	11	
Weight (kg)	1180	
Connected value (kw)	5	9.5
Extraction diameter (mm)	3x60/1x100	1x120/3x60/1x100
Electrics	400 V - 3 Ph - 50 Hz	
Pneumatics (bar)	6	




Coil

b









"Ideally prepared for your requirements"

A member of the Homag Group of Companies



#### HOMAG India Pvt. Ltd.

Head Office & Knowledge Centre No.88 Industrial Suburb, II Stage, Tumkur Road, Bangalore - 560022, Karnataka State, India.

Tel.: +91 80 23575421 / 22 / 23 / 24 www.homagindia.com email: info@homagindia.com



#### **HOMAG Machinery** Bangalore Pvt. Ltd.

#25,B-C, IV Cross, III Main Road, II Phase, Peenya industrial Area, Bangalore - 560058. Karnataka State, India.



# **BRANDT**

info@brandt.de

http://www.brandt.de

Kantentechnik GmbH Weststraße 2 32657 Lemgo Germany Tel. +49 5261/974-0 Fax +49 5261/6486