# cms tracer 200x/300x

CNC machining centers for plastic materials processing





CMS is part of SCM Group, a technological world leader in processing a wide range of materials: wood, plastic, glass, stone, metal, and composites.

The Group companies, operating throughout the world, are reliable partners of leading manufacturing industries in various market sectors, including the furniture, construction, automotive, aerospace, ship-building, and plastic processing industries. SCM Group coordinates, supports, and develops a system of industrial excellence in three large, highly specialized production centers employing more than 4,000 workers and operating in five continents. SCM Group: the most advanced skills and know-how in the fields of industrial machinery and components.

CMS SpA manufactures machinery and systems for the machining of composite materials, carbon fiber, aluminum, light alloys, plastic, glass, stone and metals. It was established in 1969 by Mr Pietro Aceti with the aim of offering customized and state-of-the-art solutions, based on the in-depth understanding of the customer's production needs. Significant technological innovations, originating from substantial investments in research and development and take-overs of premium companies, have enabled constant growth in the various sectors of reference.



CMS Plastic Technology produces numerically-controlled machining centers and thermoforming machines for plastic materials processing, offering technologically advanced solutions. The brand originates from the prized synergy between technical-industrial expertise in thermoforming from the historical company Villa, established in 1973, and CMS's historical experience in milling. Thanks to constant investments in research and innovation, CMS Plastic Technology is recognized as a unique partner for entire processes: from thermoforming, to trimming, to the realization of models and molds, ensuring maximum productivity.

CMS Plastic Technology is in the forefront of manifold sectors, such as: automotive, aerospace, earth-moving machinery, motorhomes, buses, railway industry, bathtubs production, technical items, visual marketing, mechanical components and packaging.

## scm@group industrial machinery and components





# cms tracer 200x/300x

TECHNICAL FEATURES OVERVIEW	4-5
SAFETY SYSTEMS	6-7
NESTING AND MUCH MORE	8
TOOL CHANGERS	9
WORK TABLES	10-11
LOADING AND UNLOADING	12-13
OVERALL DIMENSIONS	14
TECHNICAL DATA	15
DIGITAL SERVICES	16-17
THE RANGE	18-19

## **TECHNICAL FEATURES OVERVIEW**

automatic loading and unloading belt.

The new generation of 3, 4, 5-axis CNC nesting centres for drilling and routing. Models are also available in cell version with both

Sturdy, practical and resistant

tables.

"PHE" (Phenolic High Efficiency)

and "HE" (High Efficiency) work

#### cms tracer 200x/300x

CNC machining centers for plastic materials processing

#### **KEY BUYER BENEFITS**

"All in one" machining centre, 3 and 5 axes for the processing of plastic materials and advanced materials, equipped with technical solutions especially dedicated to the advanced nesting and the technical article

11, 14, 16 and 19 positions.

- Best-in-class wide spindle and head range for all machining needs up to 15kw and 24.000 rpm
- + Incomparable optimization of encumbrance thanks to the available "pro-speed" and "pro-space" solutions
- + Worktables with **unique vacuum management solutions**, thanks to the dynamic **X-Vacuum** system

#### Maximum effectiveness in all **Faster machining cycles** Tools are always machining situations thanks to FAST tool available thanks The pressure roller solution changer with 12, 14,18 to the R16 rear ensures the perfect clamping positions. tool changer. of parts such as plastic strips and profiles, small nesting parts and overlapping panels. On the whole, a perfect seal is provided in conditions of poor vacuum tightness. In the case of operations that do not involve the use of pressure Console with integrated PC, industrial PC with multi-touch rollers, these are excluded while maintaining the full performance color display, 21,5" screen size, Full HD, positioned on a support of the machine unchanged. base with displacement wheels, for an easy handling of the mobile console along the machine perimeter. COLUMN ! tracer 200x **Cms** 3-, 4-, 5-axis main electrospindle All at your fingertips with the TRB tool changer with **TECPAD** 7" remote control with

Wide range of specific pods

and spoilboard.

suitable for both HE work table

color touch-screen.

## cms tracer 200x/300x


CNC machining centers for plastic materials processing

# **SAFETY SYSTEMS**FOR PLASTIC MATERIALS PROCESSING




#### MINIMUM OVERALL DIMENSIONS, MAXIMUM SAFETY AND FLEXIBILITY: PRO-SPACE

The absence of perimeter fences facilitates the work table access on all the sides of the machine; panels can be loaded and unloaded from both the rear and front side thanks to the control devices located on both sides. The protections allow the machine to be used with a feed speed up to 25 m/min along the horizontal X-axis.

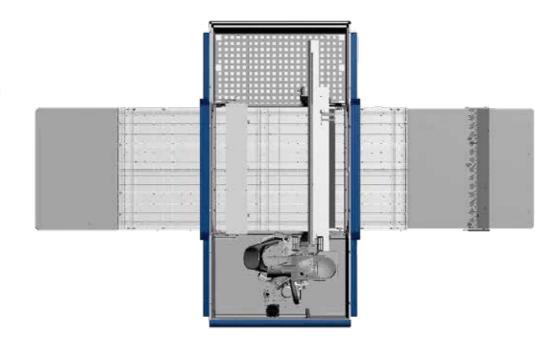

#### TOTAL FREEDOM AND HIGH PRODUCTIVITY: PRO-SPEED

Protection system for the machine use to the maximum speed. When the operator enters into the loading area, which is delimited by the front photocell barrier, the machine automatically reduces the speed; when the operator leaves the loading area, the system restores the maximum speed.

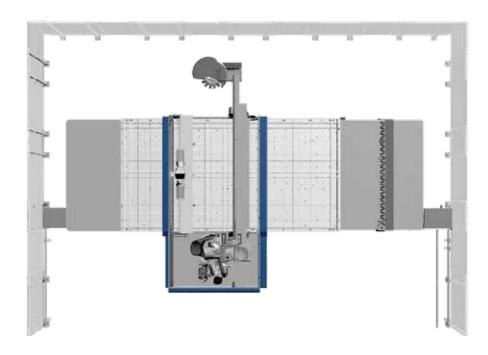


# **NESTING AND MUCH MORE**

# **TOOL CHANGERS**

cms tracer 200x/300x
CNC machining centers for plastic materials processing

**JOX ELECTROSPINDLE** The JQX (Just Quality eXtreme) 5-axis electrospindle features direct drive and up to 12 kW of power, ensures utmost machining freedom and total quality in the processing of technical articles made of plastic materials.

These specifications enable the tracer 300x to meet all nesting and 5-axis machining needs with maximum performance.

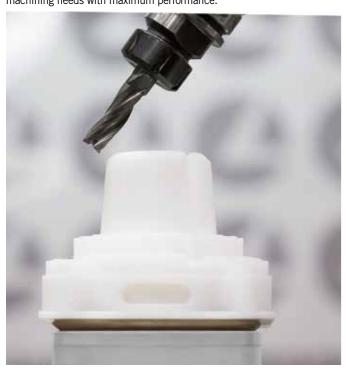





Easy cutting and grooving operations along X and Y direction thanks to the  $0^{\circ}\text{-}90^{\circ}$  blade unit.



Higher efficiency and machining time reduction with the up to  $5,4\ kW$  additional routing unit.



\* For all the configurations is available the "Pick-up" tool changer fitted on the mobile cross beam. Ideal set-up for tools and large sized angular heads.



Positioned on the machine base side, it allows to automatically detect the length of the tool.




TRB side tool changer with up to 19 positions.



Many tools always available thanks to the  $\ensuremath{\textbf{R16}}$  rear tool changer.

# **WORK TABLES**



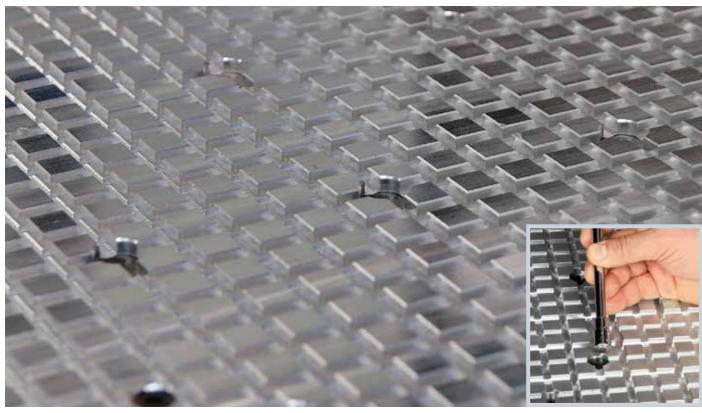


DESIGNED FOR EFFICIENCY AND SAVING: "HE" (High Efficiency) WORK TABLE
Sturdy and practical work table, resistant over time thanks to its laminate aluminum structure. Easy and quick setting with the magnetic locking system of the vacuum: in a few seconds the vacuum is activated only in the positioning area of the piece to be machined



Maximum workpieces locking only where needed: starting at 2 increasing up to 30 vacuum zones according to the table size.

#### X-VACUUM

Maximum vacuum holding capacity for processing small workpieces or highly breathable materials.

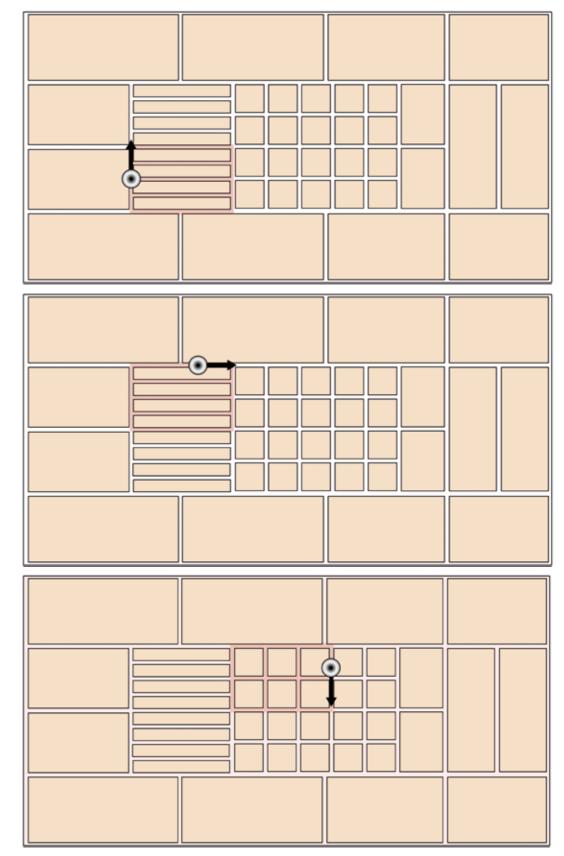



The vacuum is condensed into the area of the worktable where the workpiece is being processed.


# **LOADIN AND UNLOADING**

13

Machine available in nesting cell configuration with loading lifting table and unloading belt (also available with the loading version only or the unloading one) and right and left version

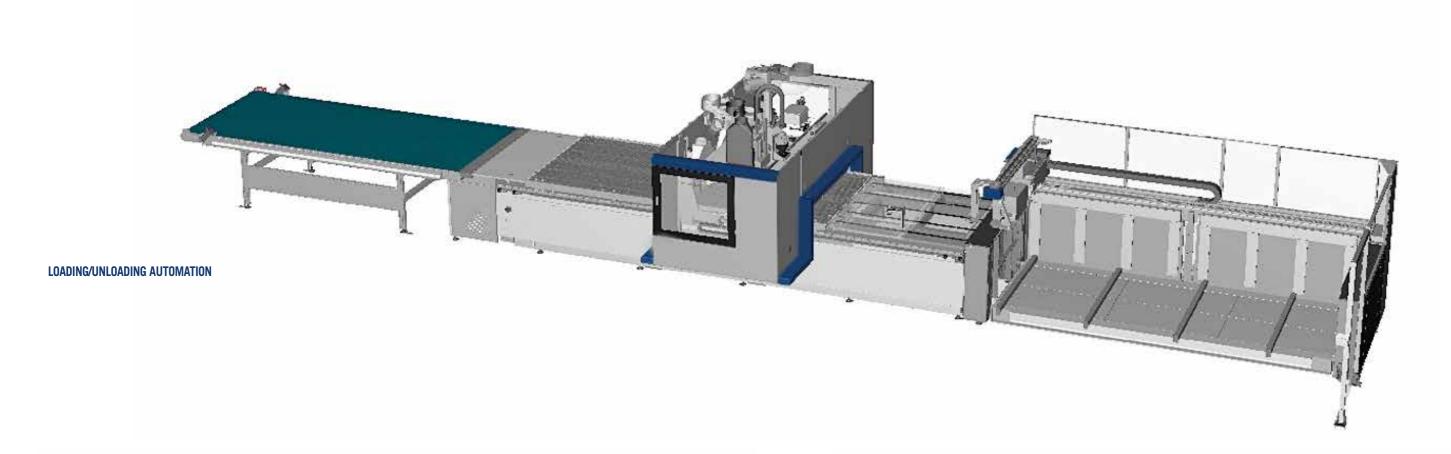

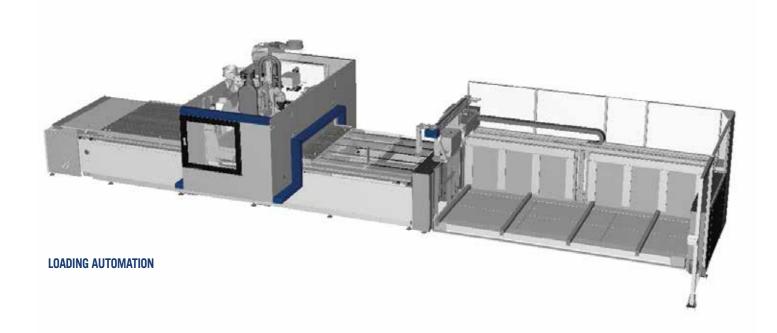

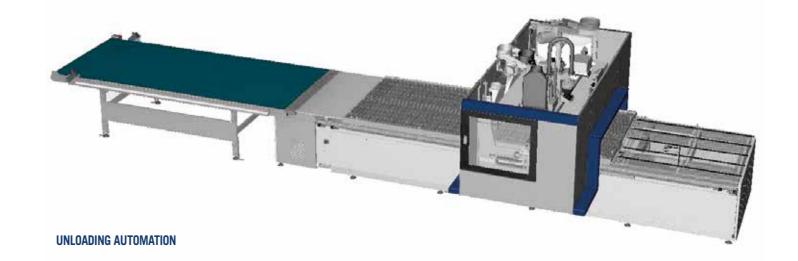


# **OVERALL DIMENSIONS**

# **TECHNICAL DATA**




\* It includes the operating area

PRO-SPACE		A	В	С
cms 200x/300x 1224	mm	2610/2790	6110/6350	3965/4465
cms 200x/300x 1531	mm	2610/2790	6710/6950	4265/4765
cms 200x/300x 1536	mm	2610/2790	7310/7550	4265/4765
cms 200x/300x 1836	mm	2610/2790	7310/7550	4565/5065
cms 200x/300x 2231	mm	2610/2790	6710/6950	4885/5385
cms 200x/300x 2243	mm	2610/2790	7910/8150	4885/5385

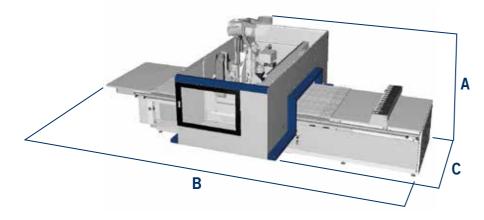

\* It includes the operating area

PRO-SPEED		A	В	С
cms 200x/300x 1224	mm	2610/2790	6570	4190/5060
cms 200x/300x 1531	mm	2610/2790	7170	4490/5360
cms 200x/300x 1536	mm	2610/2790	7770	4490/5360
cms 200x/300x 1836	mm	2610/2790	7770	4790/5660
cms 200x/300x 2231	mm	2610/2790	7170	5110/5980
cms 200x/300x 2243	mm	2610/2790	8370	5110/5980

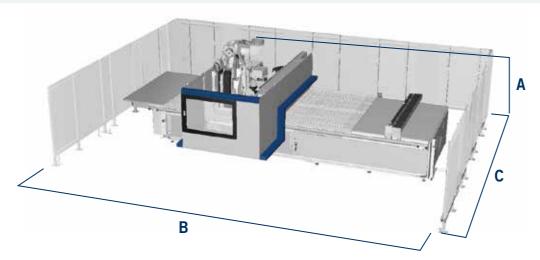

TRACER		200x	300x
AXES		2001	300%
Vectorial speed X-Y axes "PRO-SPACE" version	m/min	8	34
Vectorial speed X-Y axes "PRO-SPEED" version	m/min	1:	13
Z-axis panel passage	mm	150	180
ROUTING UNIT			
Motor power (up to)			
3-4 axis	kW (hp)	15 kW (20,5)	
5 axis		-	13,5 (18,4)
Rotation speed (max.)	rpm	24	.00
Available tools on tool changer (up to)	positions	38	53
DRILLING UNIT			
Vertical spindles (max.)	n.	2	1
Horizontal spindles (max.)	n.	12	
Rotation speed (max.)	rpm	8000	
Integrated blade in X, diameter	mm	125	
INSTALLATION			
Exhaust air consumption	m³/h	44	-30
Exhaust air speed	m/sec	25	
Exhaust outlet diameter	mm	250	



Maestro active cnc

Maestro active is our new operator interface software which has been A single operator can easily and confidently run multiple machines due to controller and interface consistency: regardless the machine, Maestro active maintains the same look&feel, with many identical icons and navigation buttons, thus ensuring the same approach to interaction.

EASE OF USE

The new interface has been specifically designed and optimized for immediate use via touch screen. Graphics have been redesigned for simple and comfortable navigation, with tablet-like icons on touch screen controller.

"ZERO" ERRORS
Improved productivity thanks to integrated help and recovery procedures that reduce the possibility of error from the operator's side.

#### Maestro cnc

# THE SOFTWARE THAT SIMPLIFIES THE WORK

CAD/CAM programming software to design all the production processes. Developed in Windows® environment it ensures easy programming with an advanced, simple and intuitive sketching environment that features all the tools necessary to design the parts, their layout on the work table, tools management and the relative machining operations. All the procedures are contained in a perfectly integrated and high performance software.

#### ADDITIONAL FUNCTIONS



#### **Maestro** Dro View - Unique in the simulation of 3D objects

3D simulator allows to have in office the three-dimensional model of the machine and to visualize in advance all the machinings that will be done during production.



#### **Maestro** 3d - Unique in the creation of 3D objects

The module integrated in the Maestro suite is designed to program three dimensional objects on 5-axis machining centres.



#### Maestro apps - Unique know-how

Maestro apps is a library of programming functions that are always available and easy to use, developed Specifically for plastic materials processing.



#### Maestro msl connector - Total integration

Connector for third-parties with design software.

#### Maestro active cnc

# AN INNOVATIVE INTERACTION WITH YOUR CMS MACHINE FOR PLASTIC MATERIALS PROCESSING

# Factory

The creation of customizable reports by operator, shift, program, forecast period (and much more) allows to monitor, optimize and improve the production performance.

### FULL MACHINE AWARENESS AND KNOWLEDGE MANAGEMENT SYSTEM

**FULL CONTROL OF PRODUCTION PERFORMANCES** 

Maestro active allows to record the times related to setup, maintenance, training and other events, tracing all the activities in a database. The operator's know-how is also stored and made available to other people inside the organization thanks to the possibility to comment and document all production events or notifications.

#### **ORGANIZE YOUR PRODUCTION**

Maestro active allows to create different users with different roles and authorizations (e.g.: operator, maintainer, administrator, ...). Any user can only execute the functions whose permissions have been assigned to him. It is also possible to define the work shifts on the machine and then detect activities, productivity and events that occurred in each shift.

#### TOTAL QUALITY OF THE FINISHED PRODUCT

With Maestro active the quality of the finished piece is no longer put at risk by worn tools. The new Maestro Active Tool Life Determination system sends notification messages as the tool reaches its end of life and recommends its replacement at the most appropriate time.

#### **TOOLS? NO PROBLEM!**

Maestro active guides the operator during the magazine tooling phase, taking into account the programs to be executed

# THE RANGE OF CMS PLASTIC TECHNOLOGY

# FOR PLASTIC PROCESSING











