
You are always welcome at Friulmac.

We appreciate your interest in our equipment. Please call to make arrangements for a personalized visit. The city of Udine, located in the Italian region called Friuli, is considered the European chair manufacturing center where a concentration of know-how and technology can be found. You will experience how the world's best selling DET and Wood Machining Centers are designed, produced and assembled and how you, our CUSTOMER, stand at the top of our business philosophy.







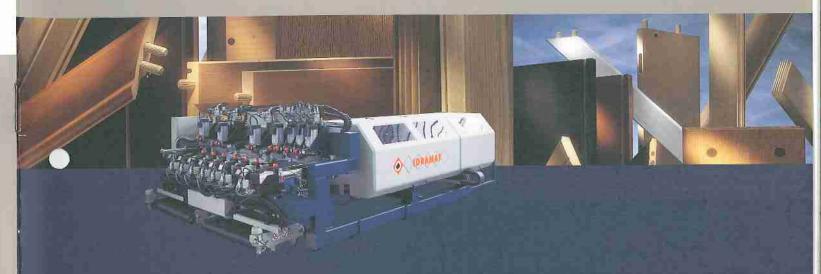

SEDE CENTRALE

HEAD OFFICE
FRIULMAC S.p.A.
Via delle Industrie - Z.I.U.
33050 Pavia di Udine
(UD) Italy
Phone +39 0432 655007 r.a.
Fax +39 0432 655107
Hitp: //www.friulmac.it
E-mail: friulmac@friulmac.it

SALES AND SERVICE
FOR NORTH AMERICA
FRIULMAC Inc.
1264 25° Street Place S.E.
Hickory, N.C. 28602 - USA
Phone 828/327-6265
Fax 828/327-6273
Toll free number 1 800 282-1690
Http: //www.friulmacusa.com
E-mail: friulmac@friulmacusa.com



Improve quality and output! Become more flexible!

THE BEST EXPRESSION OF FRIULMAC PHILOSOPHY. A MODULAR STURDY BASE FRAME THAT CAN ACCOMODATE UP TO 5 WORKING STATIONS PER SIDE ACCORDING TO OUR CUSTOMERS REQUIREMENTS. END TRIM, PROFILE, END-BORE, GLUE & DOWEL, MORTISE, DOVE-TAIL, EDGE-BORE, FACE-BORE... **ENDLESS COMBINATIONS!**

FRIULMAC

Idramat possible configurations.

IDRAMAT/E IDRAMAT/S **10** • 0 007 009

Statements and illustrations in this brochure may include optional equipment. As our policy is to constantly improve design, the details given in this leaflet should not be regarded as binding.

Endless solutions.

Scoring unit "B-2"	Hauncing unit "I-2"	
Beveling unit "B-3" ,	End-boring unit "M"	_**
Trimming unit "B-8"	End-boring unit "M/45°"	
Top trimming unit "B-12"	Face boring unit "N-1"	
Vertical trimming unit "B-12/45°"	Back boring unit "0-1"	100
Bottom trimming unit "B-13"	Bottom boring unit "Q-3"	
Jump profiling unit "J-1"	Glue injection/dowel insering unit "R"	-14
Profiling unit "J-2"	Glue injection/dowel insering unit "R/45°"	
CNC routing unit "J-3"	Glue injecting unit "R-4"	
CNC routing unit "J-4"	Glue injecting unit "R-4/45°"	0.0
CNC profiling unit "J-5"	Dowel insering unit "R-5"	

Profiling unit "L"




Dowel insering unit "R-5/45°"

Idramat technical specifications.

IDRAMAT/E		IDRAMAT/S		
Workpiece length	(based on configuration) - 1,000 mm	(BOC) - 39"	190 - 1,000 mm	7 31/64" - 39" (at 45" min. 180 mm - 7")
Workpiece width	30 - (based on configuration)	1 3/16" - (BOC)	30 - 200 mm	3/16" - 7 7/8" (at 45° max. 100 mm - 3 15/16"
Workpiece thickness	12 - (based on configuration)	1/2" - (BOC)	12 - 45 mm	15/32" - 1 49/64"
Production capacity	14 - 20 pieces/min.		Based on parts dimension and machine configuration	
	(subject to parts dimension and machine configuration)			

Idramat available options.

	IDRAMAT/E	IDRAMAT/S		
Workpiece max, length increase	Up to 3,000 mm - 118"	Up to 3,000 mm - 118"		
Quick disconnect profiling spindles system			0	
Workpiece return conveyor- system to the operator	•	•		
Sound/safety wing opening Hoods				



Non-stop manufacturing.

MECHANIZATIONS

A VARIETY OF PRODUCTS REQUIRES A VARIETY OF SOLUTIONS...THAT WE CAN PROVIDE.

ACCORDING TO THE LEVEL OF AUTOMATION AND PRODUCTION CAPACITY OF THE

PLANER/MOULDER AND/OR DET, WE HAVE SEMIAUTOMATIC AS WELL AS FULLY AUTOMATIC

LINKING DEVICES TO OFFER. DIFFERENT SOLUTIONS ARE AVAILABLE FOR BOTH LENGTHWISE AND

IN DEVELOPING AND MANUFACTURING THE MOST SIMPLE AND EFFICIENT LINKING SYSTEMS, SPECIAL ATTENTION HAS ALSO BEEN GIVEN TO THE DESIGN.














Just a few examples...



Horizontal CNC ROUTING UNIT "J-4"

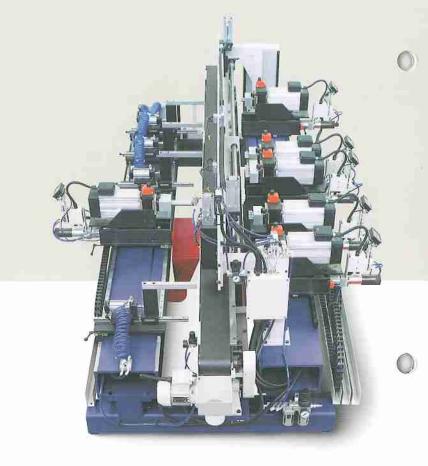

DOUBLE EDGE BORING MACHINE "MP-9/B"



Transversally moving SCORING AND TRIMMING UNIT "B-8/B-2"

IDRAMAT

PROFILING UNIT "J-2" with back-up blocks and pneumatic chip-breaker



Detail view of the referencing and clamping system for working units positioned at 45° angle



CNC ROUTING UNIT "J-3"



QUICK DISCONNECT PROFILING SPINDLE SYSTEM to reduce set-up time and Increase productivity

Vertical




Vertical PROFILING "I-2"






Any kind of profile. Any!



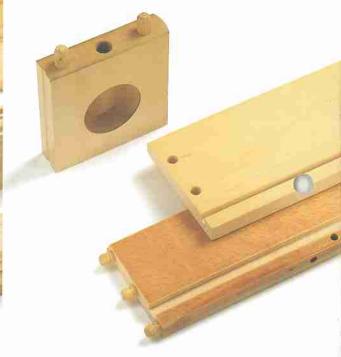

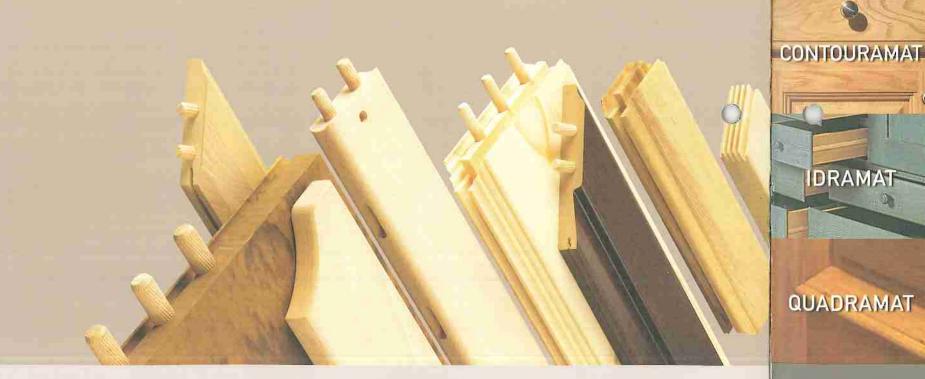

Our machines, their features.



F' OORMAT

RANDOMAT

IDRAMAT

QUADRAMAT








Workpieces return conveyor and stacking system to create a one









The most user-friendly double end-cut profiling the market. Pin-pointed for today's

just-in-time





Extreme precision, state of the art technology, super reduced set-up time, modern design, this is what you expect from your machine investment, this is what Friulmac guarantees offering



End matching of random length flooring. cabinet and entry doo rails has graduated to top-notch quality and

small investment it allows processing of any kind of profile



The only double end-cut profiling machine that makes "just-in-time" easy! Only one operator required, it can process any kind of end profile without tear-out. Extremely user friendly and flexible, it can be provided with end-boring, face boring vertical boring.



The best expression of Friulmac philosophy.

A modular base frame that can accompdate up to 5 working stations per side according to your

End trim, profile, end-bore, glue & dowel, mortise, dove-tail, edge-bore, face-bore,, endless



The Quadramat line is designed to process an extremely wide range of operations, for both solid wood and panel products.

All versions of Quadramat are built based on a modular concept to suit all your needs and

