



EX-FACTORY

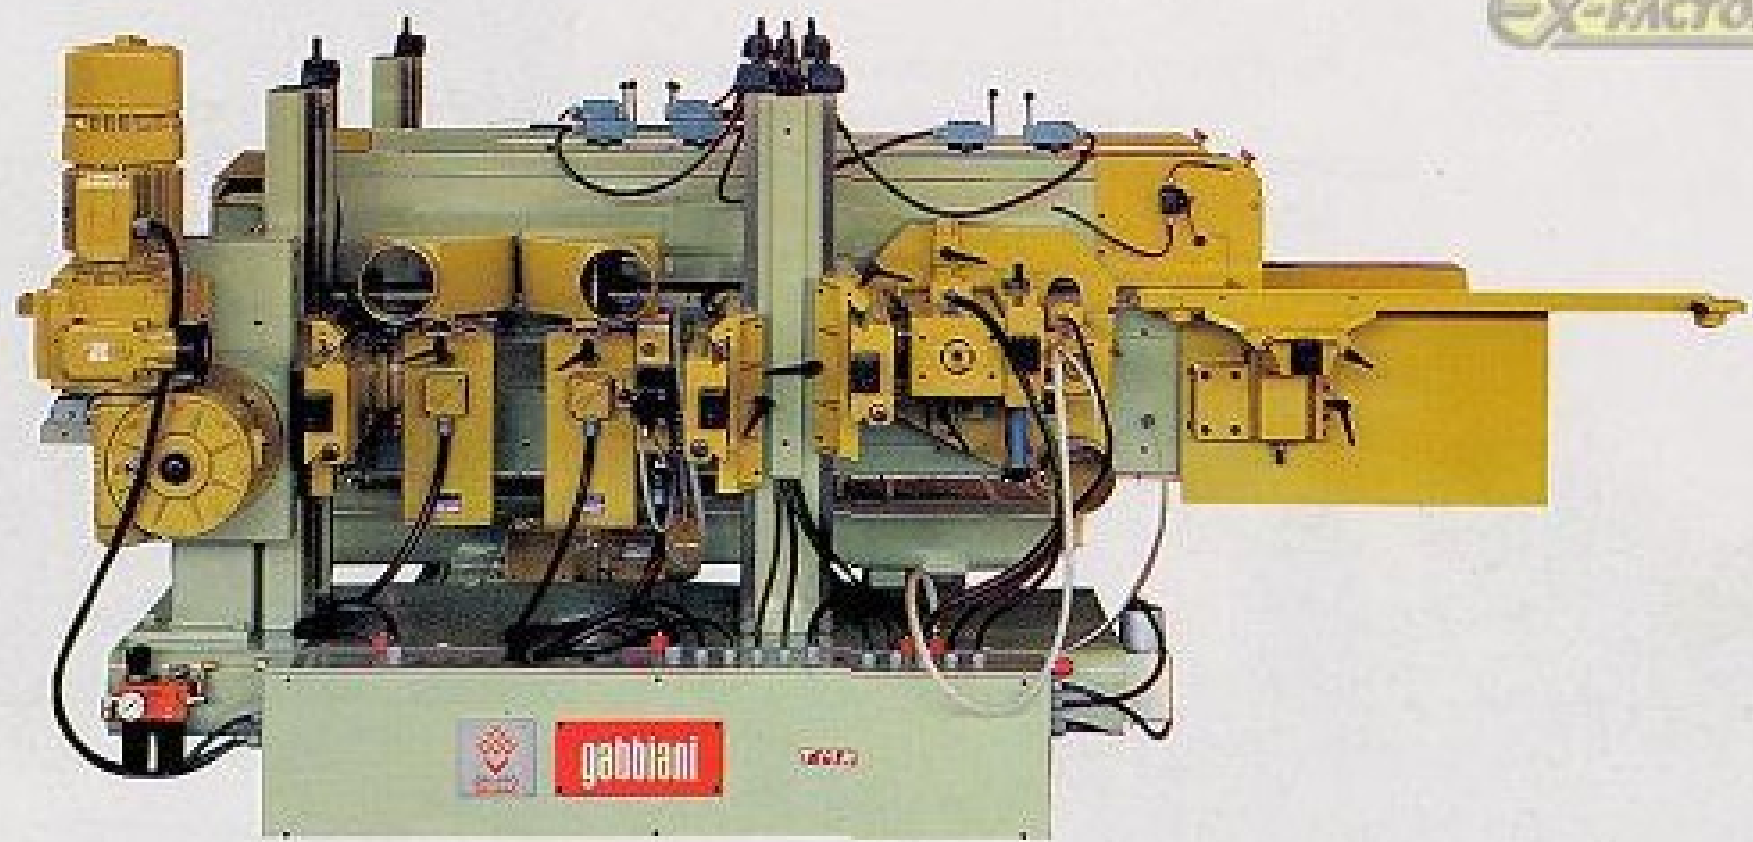

gabbiani

1950

EX-FACTORY

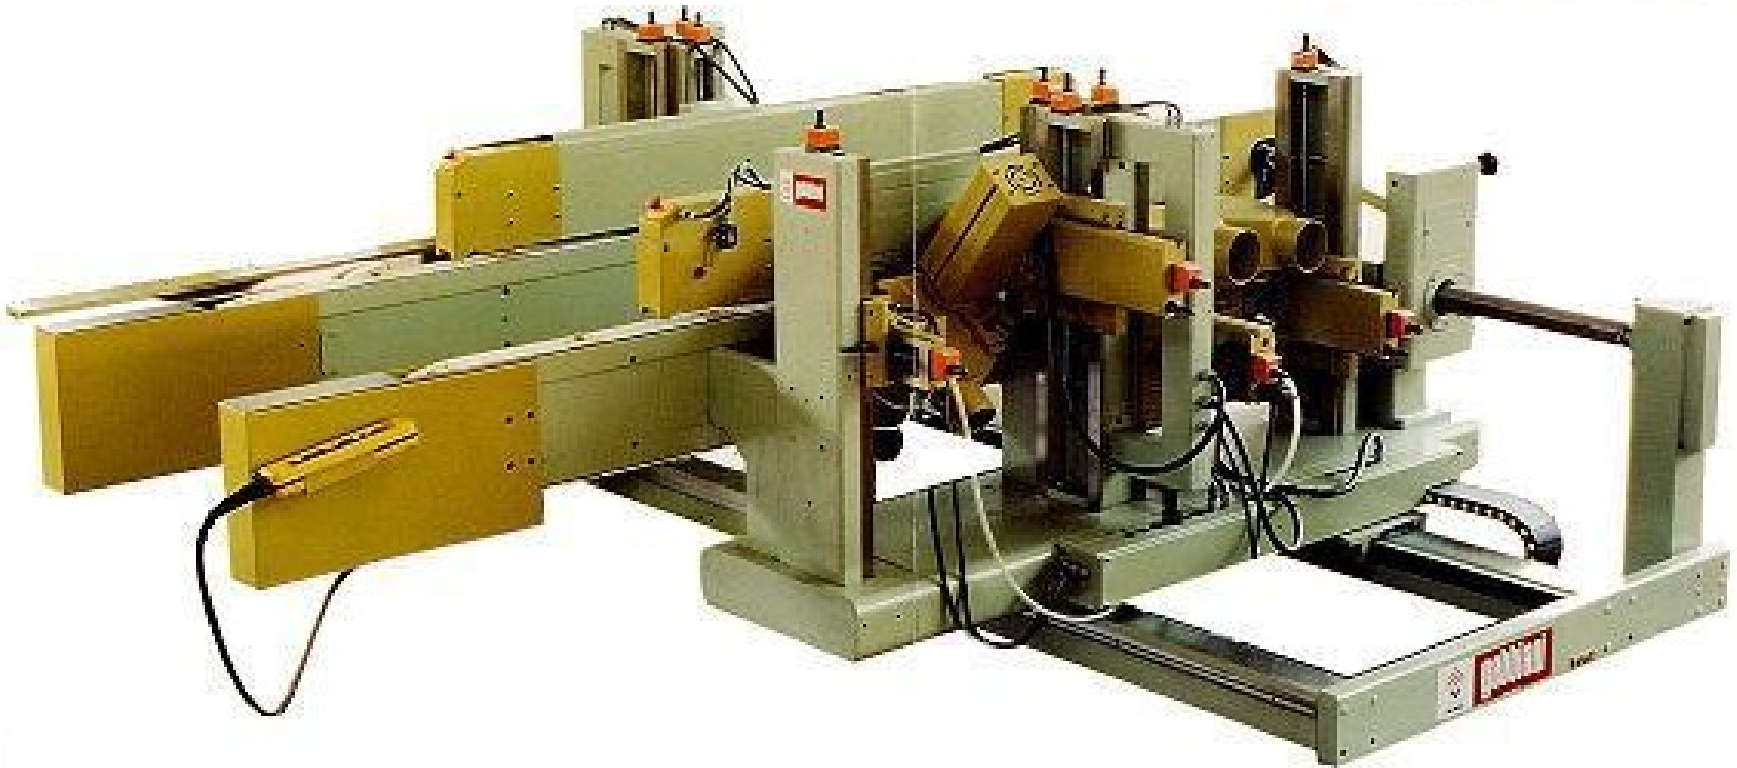




Top and bottom hogging unit mod. TDS



Tenoning unit with stackable tool mod.
MULTIPLO 560 R with automatic chipbreaker









Hogging unit whit jump scoring mod. 470 R

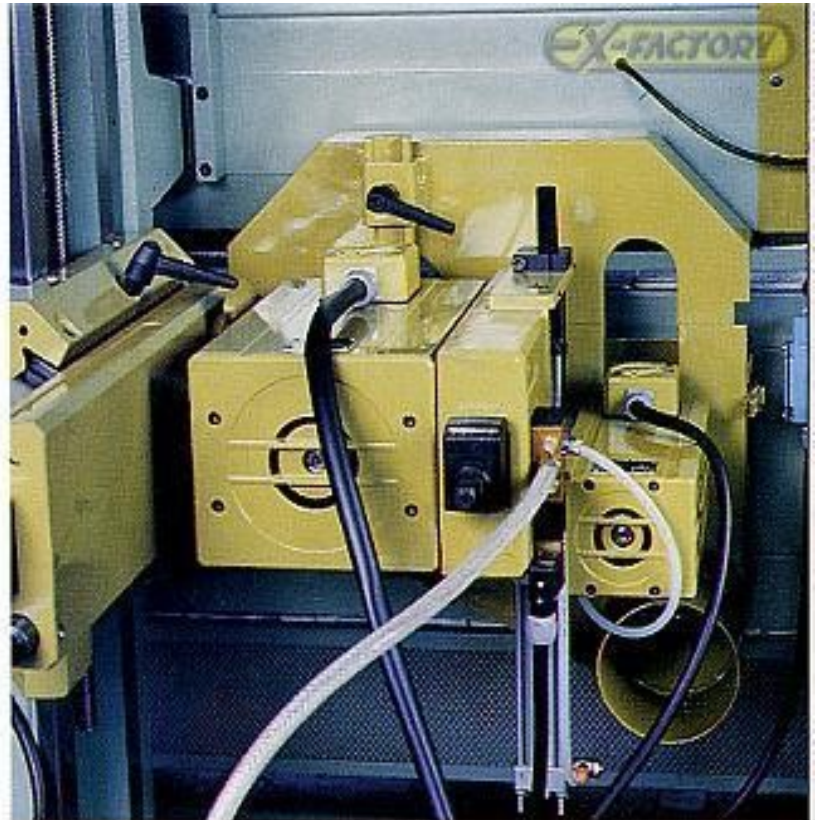

Universal milling/moulding unit
with tiltable jumping device mod. 480 R



Double end tenoner TMK of modern conception with high resistant double bed and feed chain tracks fitted with articulated junction links on needle bearings which guarantee its flexibility, accuracy and strength.

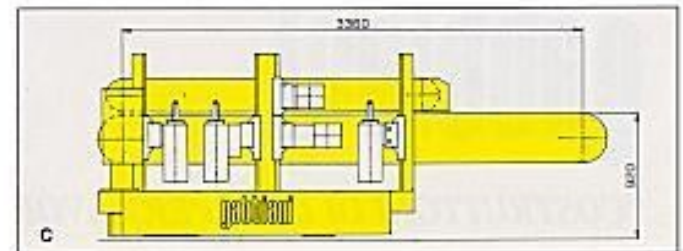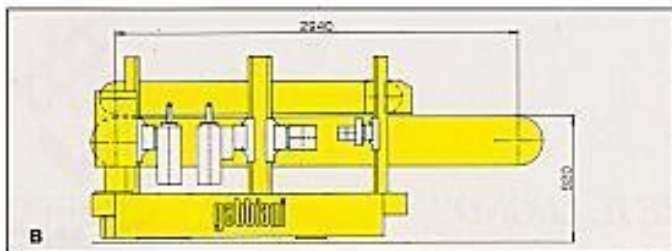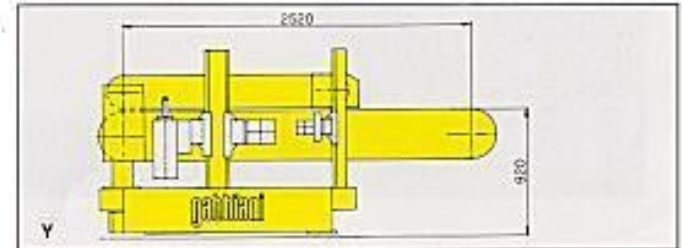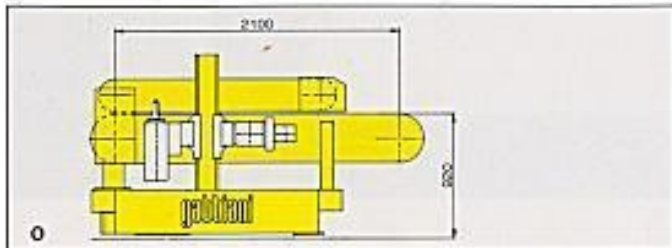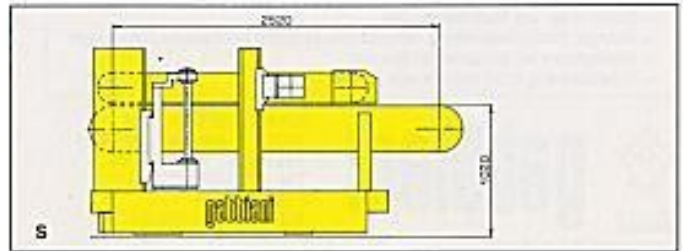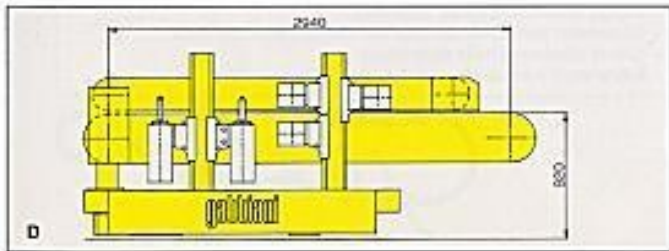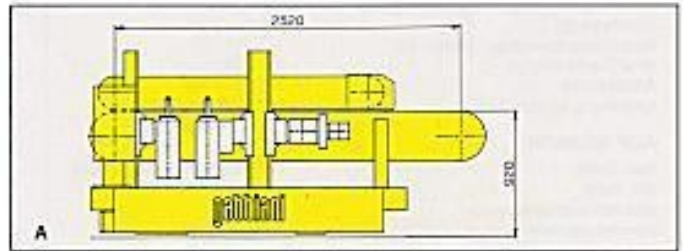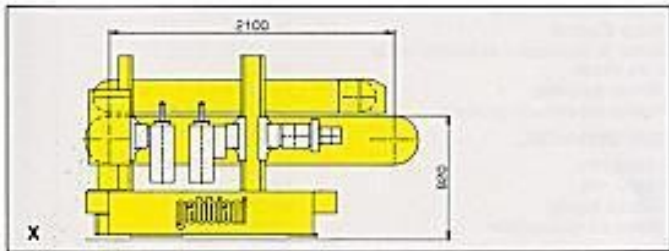



STANDARD TECHNICAL CHARACTERISTICS:

Max. width	mm 3100
Min. width	mm 220
Max. height	mm 180
Dog distance	mm 400
Variable feed speed	m/min. 4 ÷ 24
Feed motor	KW 3
Positioning motor of movable side with one speed	KW 0,55
Head motors	KW 1,5 ÷ 7,5
Rotation of head motors	3000-3000/6000-6000 RPM

ON REQUEST:

Max. width	mm 1600-2100-2600-3600-4100
Min. width	mm 160
Dog distance	mm 200
Variable feed speed	m/min. 6 ÷ 36

- Positioning motor of movable side with two speeds
- Automatic head motors
- Tenoning, milling, and stackable tool units
- Read out, positioner, partial or total electronic controls
- Head motors with electronic brakes
- Sound proof cabinets and tunnels