





MIREA

Bordatrice con colla termofusibile 0,4-3 / 5 mm
Edgebander with hot melt glue 0,4-3 / 5 mm
Aplacadora de cantos con cola termofusibile 0,4-3 / 5 mm




opt.



opt.



Gruppo di superfinitura
Unit of high finish
Grupo de super-acabado

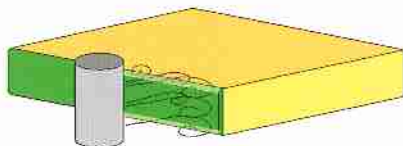

BORDATRICE DI QUALITA' SUPERIORE
EDGE BANDER OF TOP QUALITY
APLACADORA DE CALIDAD SUPERIOR




DATI TECNICI	TECHNICAL DATA	DATOS TECNICOS	MIREA
Potenza assorbita	Installed power	Potencia absorbida	5 kw
Dimensioni minime pannello	Min.workpiece dimensions	Dimensiones minimas del panel	70 x 140
Spessori pannelli	Panel thickness	Altura del panel min/max	10 x 45
Spessore massimo bordi	Max. edgeband thickness	Espesor canto retestabile	3 / 5 mm
Alimentazione	Electrical supply	Alimentacion	380 V -50 Hz
Velocità motori rifilatori	Trimming motors speed	Velocidad motores perfiladores	10.000 R/1'
Velocità motore intestatore	End-trimming motor speed	Velocidad motor retestador	10.000 R/1'
Supporto frontale estensibile	Adjustable frontal support	Soporte frontal extensible	0 / 600 mm
Frese rifilatori sagomate	Cutterhead with radius-blade	Fresas perfiladoras	70x14x12z4 15°
Peso netto	Net weight	Peso neto	kg 750



Höchsmann GmbH
 Schwabacher Straße 4
 D - 01665 Klipphausen

Telefon +49 (0) 3 52 04 / 651- 0
Telefax +49 (0) 3 52 04 / 651- 90
eMail info@hoechsmann.com
Internet www.hoechsmann.com

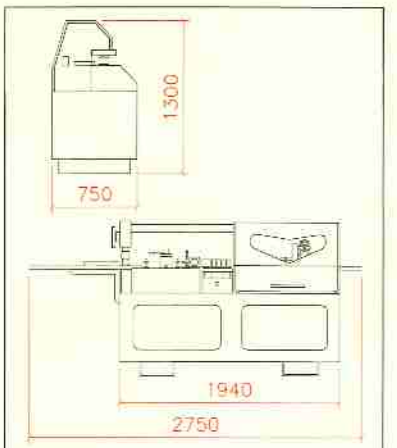

Via Giaccaglia 7-47900 RIMINI-RN-ITALY
 info@hirtz.com www.hirtz.com
 tel.0039-541-389362-389412 fax 388650