



Heavy Carpentry Chain Mortising Plant (power current) Typ KS 36 AK

Stationary plant in compound rest with safety grip switch, gear braked, substruction in solid metal design, travelling on 4 steering rolls with brake. Roller track length 2000 mm with stop guide fence and 1 tiltable stop. pneum. Beam clamping device

Motor performance 3,0 KW, 400 V, 50 Hz

Depth of mortising : 150 mm (standard) autom. feeding operation.


Width of slot : 40 mm


adjustment of height (z-axis) : 300 mm

adjustment of width (y-axis) : 300 mm

adjustment of length (x-axis) : 300 mm

(combinable with Schneider tenon cutting machines)



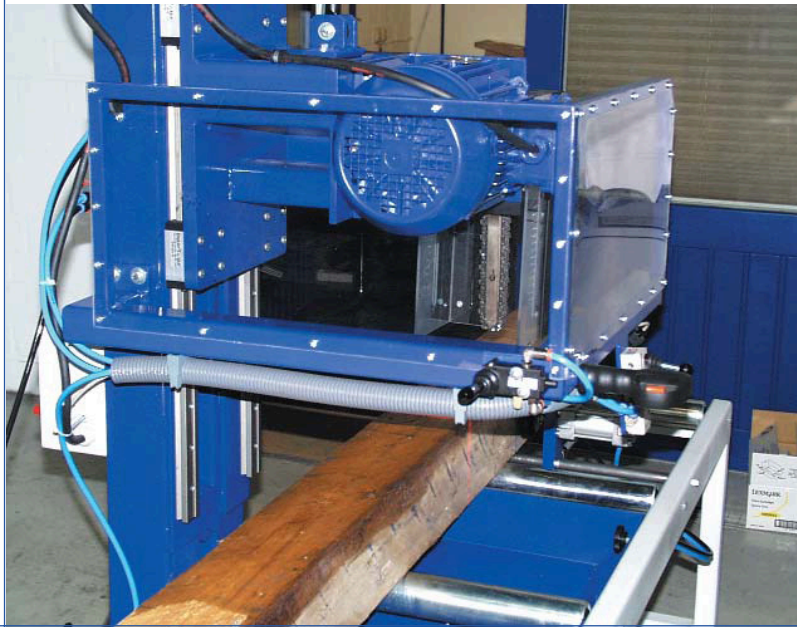

Designation Extras

400010

Tiltable stops, unit price

400020

Additional roller track, per m

400072

Chip collecting trough with extraction port

400030

Additional stop guide fence with scale, per m

400040

Laser cut indicator

400050

Threaded spindle legs, 1 set = 4 legs

400060

Spare mortising chain, 40 mm

400070

Spare mortising chain, 35 mm

400071

Automatic moulding chain lubrication with supply tank

