


# ST130 RESAW



ULTIMATE SPECIFICATION,  
REFINED POWER AND  
PERFORMANCE

**STENNER**

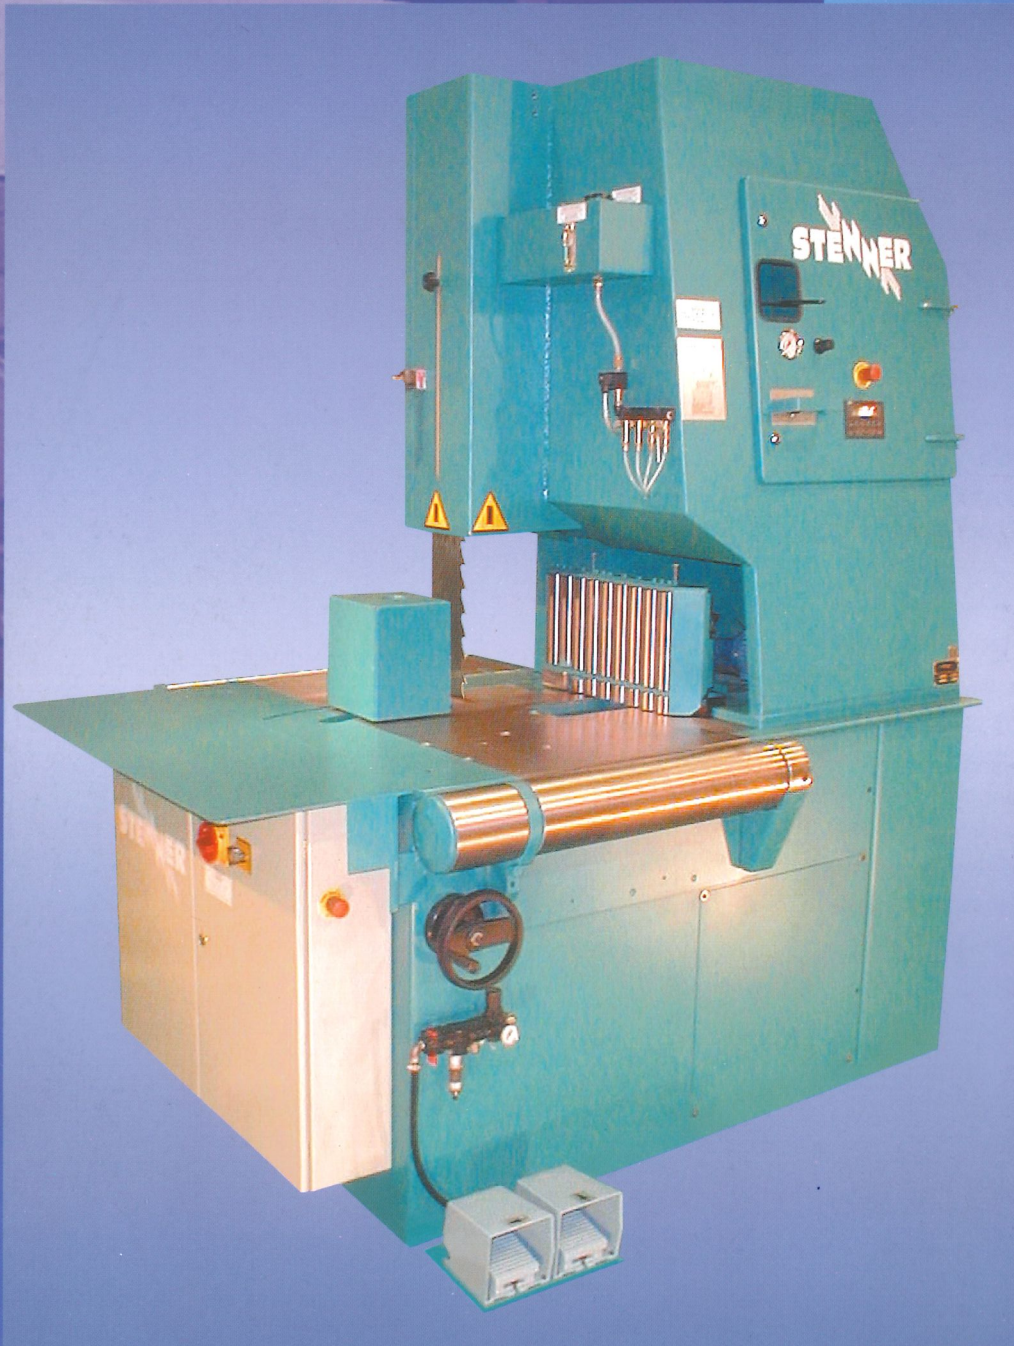

The ST130 combines the performance available from a 130mm wide bandsaw with the convenience of a machine that requires no special fixing other than bolting it to the factory floor.

The resulting package is a very high performance radial arm resaw capable of producing quality sawn timber from even the largest of cross sections.

As a standard the machine includes key features which ensure both its performance and its reliability. These include a power operated heavy duty multi-roller fence; a genuine radial arm operated by "soft" pneumatics ensuring both safe movement and maximum drive; heavy duty table rollers and operation and diagnostics undertaken by a single HMI controller.

The ST130 can be further uprated by adding drive to the table rollers, their speed being automatically synchronised with the radial arm feed. The HMI can be relocated in a remote control pedestal and a programmable fence setting system incorporated. In addition where a number of different species are to be sawn then variable blade speed can be provided to optimise performance.



HMI Control Unit



Pressurised Spray Lubrication (Optional)



Remote Control Pedestal (Optional)



Power Operated Fence

# STENNER

## Stenner Limited Sawmilling Machinery Manufacturers

Blundells Road, Tiverton, Devon  
EX16 4JX United Kingdom

Tel:(44) (0)1884 255 700 Fax:(44) (0)1884 257 794

E-mail: Stenner@stenner.co.uk

Website: www.stenner.co.uk

Available From

### ST130 SPECIFICATION

Bandsaw thickness upto	1.06mm (19g)
Bandsaw width (Max)	130mm
Bandsaw length (Max)	5765mm
(Min)	5637mm
Bandsaw pulley diameter	950mm
Depth of cut (Max)	400mm
Max Opening:	
Roller fence to saw line	305mm
Feed rolls to saw line	300mm
Feed speeds (Variable)	15 - 60m/min
Main motor (Standard)	22kW
(Optional)	30kW
Cleaner fluid capacity	5 litres
Size of Machine:	
Height	approx 2500mm
Width	max 2800mm
Length	max 1600mm
Nett weight	2750kg
Working Height	955mm

### OPTIONAL EXTRAS

- 22kW main motor with variable saw speed.
- 30kW main motor.
- Remachinable pressure sawguide system replacing standard replaceable pressure sawguides complete with refacing machine.
- Pressure Spray Lubrication System replacing standard drip feed System.
- Programmable Fence Setting System. HMI mounted in remote pedestal and includes programmable setting system.
- Powered table rollers synchronised with radial arm feed.
- Sawblade deviation detector.
- Timber detection device allowing automatic operation of radial arm.
- Arris, spiked and rubber covered feed rollers for customers differing applications.

The company has a policy of continuous product development and improvement, specifications are therefore subject to change without notice. The company accepts no liability for discrepancies in specifications or illustrations contained in its publications.