


Angle-cutting unit WSG


Precision in every position

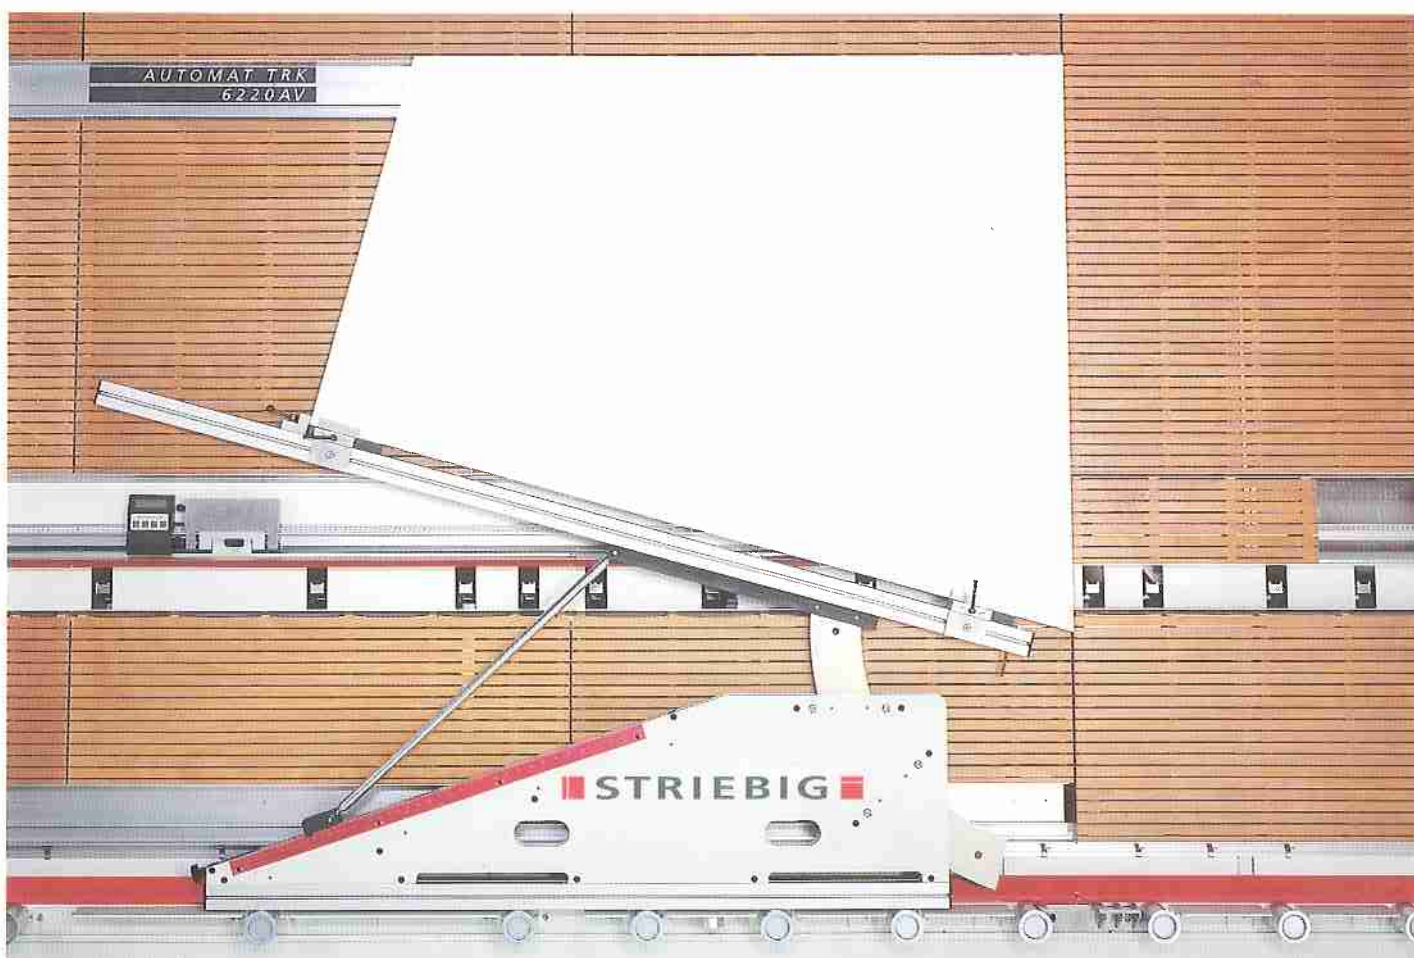

Precision angle-cutting unit STRIEBIG WSG




- Fast setting up and high stability thanks to firm attachment to the panel saw.
- Safe, precise setting of angles from 0–46°.
- Rational cutting operations as set dimensions are precisely maintained at all angles.
- High productivity as time-consuming adjustments to different cutting situations are unnecessary.
- High cutting quality with all edges ready for gluing.
- Robust construction allows angle cuts to be made on large and heavy panels directly on the panel saw.

STRIEBIG WSG – Cutting line pivot point

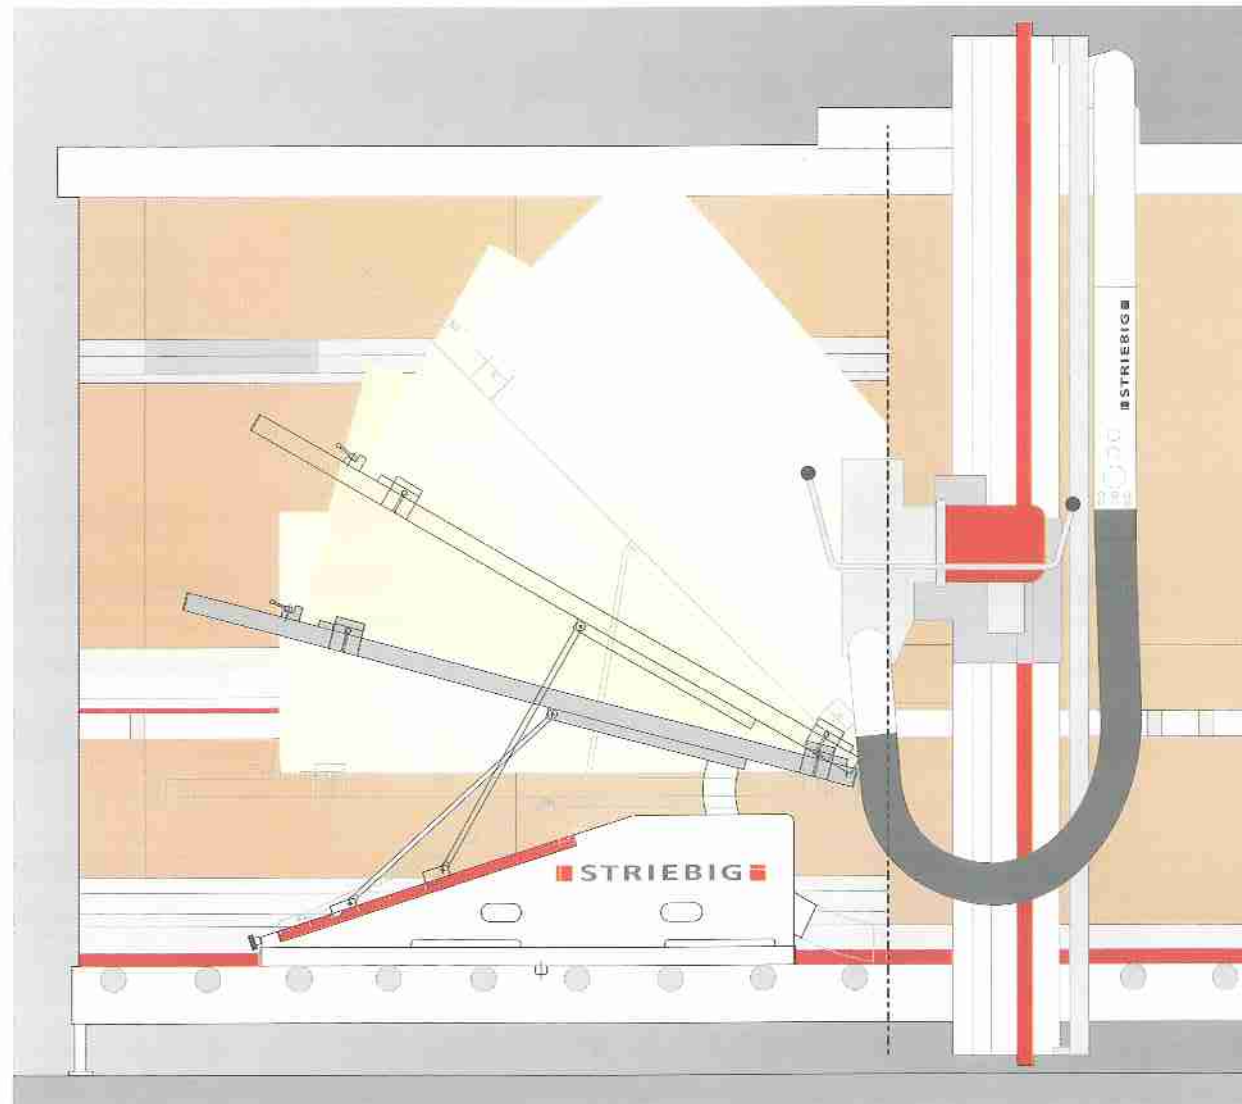


The workpiece support of the angle-cutting unit moves in a circle, the centrepoint of which is on the cutting line. The pre-set dimension is maintained at all angle settings.

STRIEBIG WSG – Methods of use

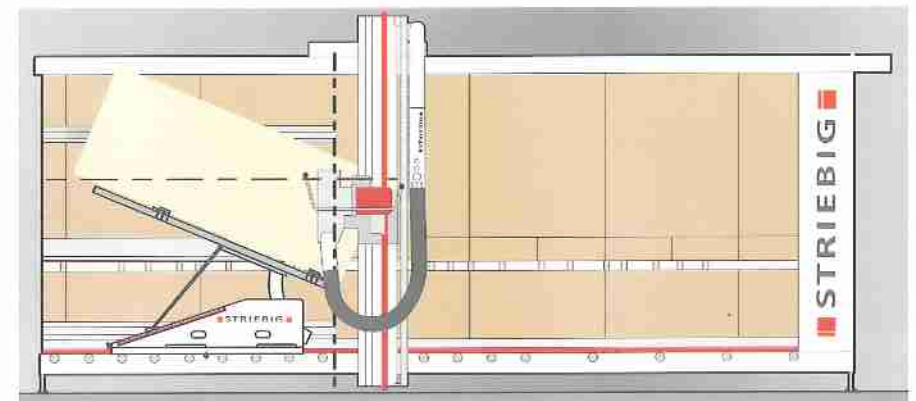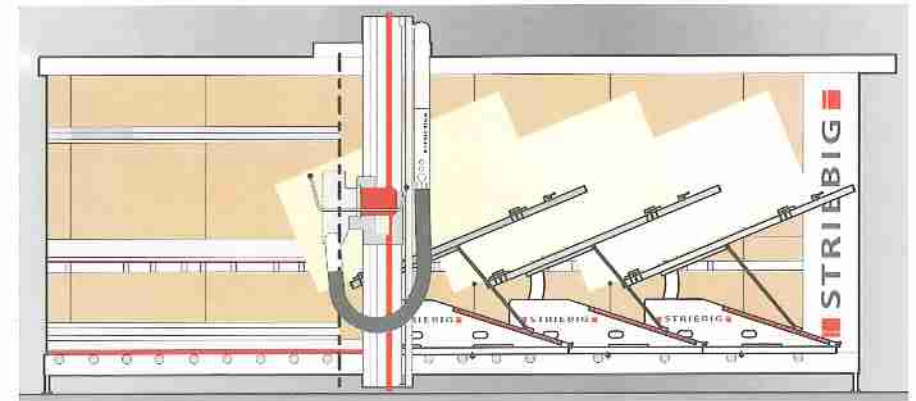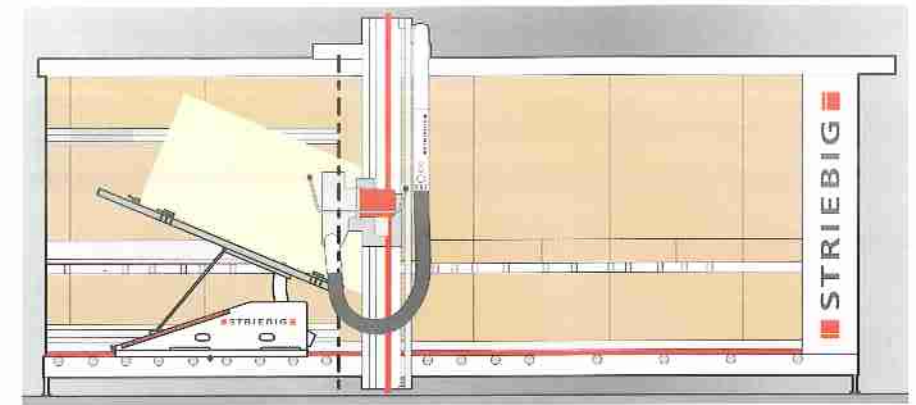

STRIEBIG WSG – Additional methods of use

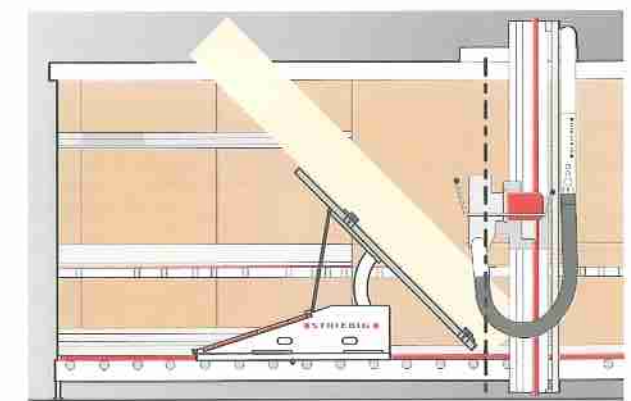

Striebig WSG - the benefits at a glance

- The edge-length of the workpiece is infinitely adjustable.
- The angle-cutting unit can be used on either side of the cutting point.
- The vertical cutting point can be selected as required.
- Angles can be adjusted accurately, easily and quickly.
- Inadvertent resetting under load is prevented by a locking protection device.

Technical specifications

Swivelling and measuring range	0–46°
Dimensions at zero	1930x550x80 mm
Clamping	Two screw clamps, one adjustable
Clamping range	0–42 mm
Repeatability	± 0.01°



The packaging in which your Striebig Angle-cutting unit was supplied can be used as a practical storage rack in your shop.



The edge-length of the workpiece can be adjusted using the stop and the integral measuring scale. Panels up to a maximum thickness of 42 mm can be handled by the clamps without any damage.



Coarse and fine adjustment using a stop-locking system and knob. Can also be set to an accuracy of 0.1° when under load from 0 to 46°.

6.96/3000e

Striebig AG
Grossmatte 26a
CH-6014 Littau/Luzern
Phone 041-250 02 57
Fax 041-250 51 66

www.hoechsmann.com