


opti-stack 3000


**after
Horizontal resaw**



System TM offers system solutions
for the optimization of
wood and staff resources

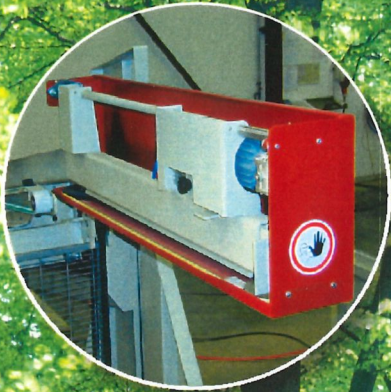

opti-stack 3000 after horizontal resaws

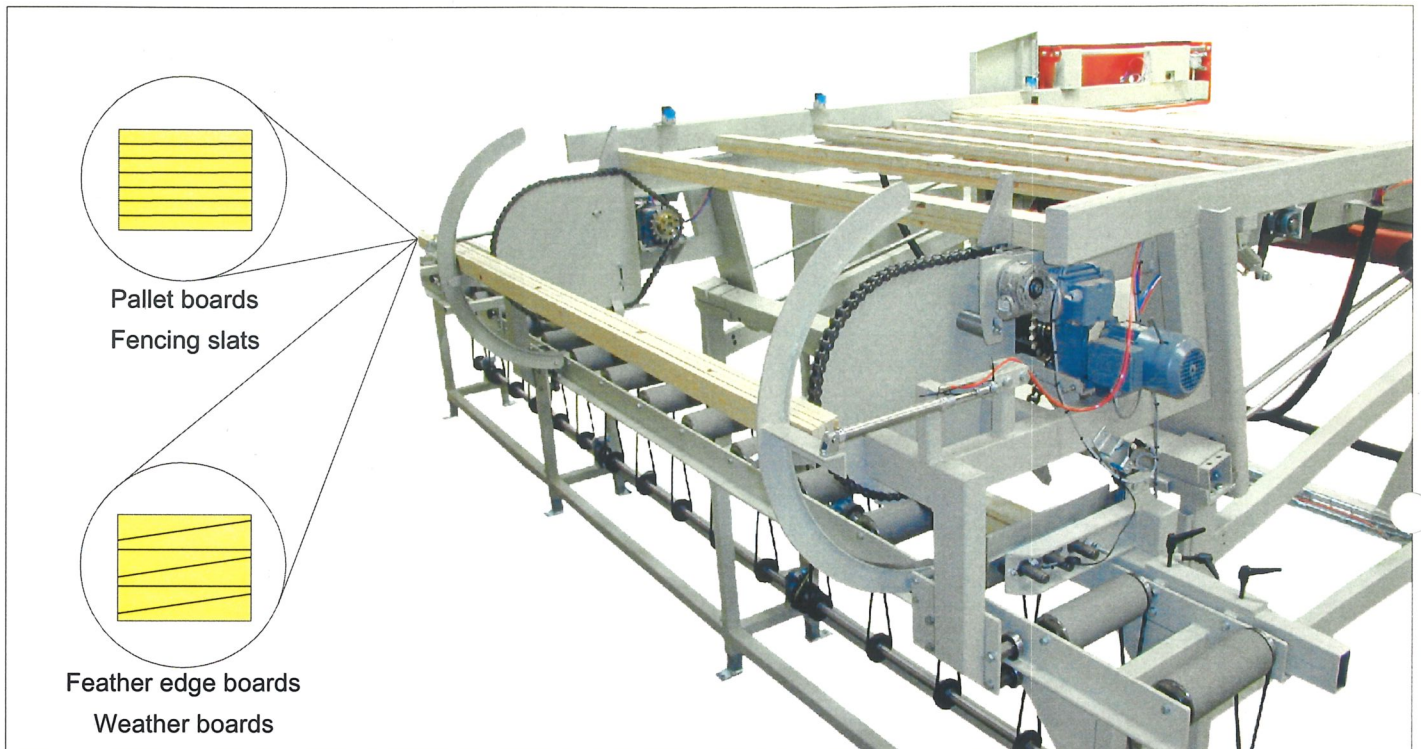

Applications:

Horizontal resaw
Other main machines on request

Optional extras:

Automatic placing of stability sticks
Brick stacking
Maximum width= 300 mm (12 inches)
Automatic length adjustment
Maximum length = 2500 mm (98 inches)

Technical data:

Length: 700 mm - 2000 mm (27 inches - 78 inches)
Width: 50 mm - 200 mm (2 inches - 8 inches)
Block thickness: 50 mm - 100 mm (2 inches - 4 inches)
Board thickness: 15 mm - 75 mm (5/8 inches - 3 inches)
Pack height: 1,200 mm inclusive of pallet (32 inches - 48 inches)
Pack width: 800 mm - 1,200 mm (32 inches - 48 inches)
Pack weight: 1500 kg (3300 lbs)
Indfeed height: 850 mm

Technical data subject to change without prior notice. The data can vary according to the specific design of the line. Please contact us should you need any further information



System TM A/S

Skovdalsvej 35 Postboks 249
8300 Odder Denmark
Telefon +45 86 54 33 55
Telefax +45 86 54 32 19
E-mail: tm@systemtm.com
Internet: www.systemtm.com