


# eXess

## HAND ROUTING UNIT

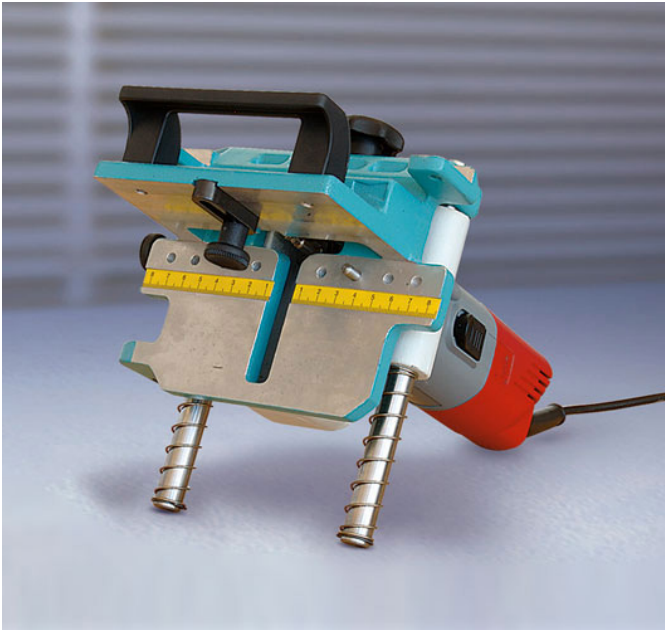

Flexible hand routing unit to produce dovetail slots in sizes W-1/2/3 as well as W-4 (option). Entry level model without compromising quality or performance.

### Function

Routing operation by choice of fixed(1) or by hand (2).

1. The hand unit is secured to the workbench. The work-piece is positioned and held on the fence. The router unit is raised manually through the work-piece.
2. The hand unit is placed on the work-piece and secured. The router unit is then pushed down through the material.

### Technical data

Power supply	1ph/N/PE 230 V, 50/60Hz 0.5 kW
Motor	1 x 530 W
Rotation speed without load	29.000 1/min.
Control	manual
Work-piece clamping	manual
Routing depth	0 - 68 mm
Extraction port size	Ø 28 mm external
Hoffmann Key sizes	W 1 / 2 / 3 / 4 (opt.)
Dimensions W/D/H	185 / 330 / 230 mm
Weight	3,3 kg
Order No.	W 101 4000

Technical changes without notice.



### Hoffmann GmbH Maschinenbau

Mergelgrube 5 · 76646 Bruchsal (Germany)  
Phone +49 7251 9544-0 · Fax +49 7251 9544-44  
info@hoffmann-schwalbe.de · www.hoffmann-schwalbe.de

