Perfect edging taken to the point

STREAMER 1053 | 1054



PRODUCTIVITY AND PRECISION





Superior appearance for all materials

Starting with the state-of-the-art, high gloss edging right up to solid wood edging with cross section of 6×65 mm, HOLZ-HER remains unequaled for variety.

HOLZ-HER sets the trends for tomorrow today.





preparation of your panel before edgebanding.

Compact control for easiest operation.


Clear and powerful

HOLZ-HER NOZZLE SYSTEM

Hybrid technology – two perfectly combined systems

The edgebander is decisive for furniture with a high quality appearance. You can also profit from 45 years of HOLZ-HER technological leadership in edgebanding.

- Change over from colored to neutral glue at the flick of the wrist.
- Change over from EVA to PUR glue is also possible within the shortest time.
- And the entire system can also be completely cleaned in just minutes.

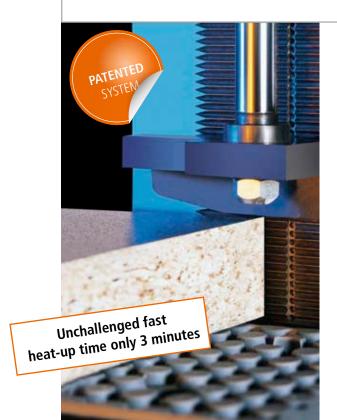



Process PUR glue as easy as

Multi-function cutter unit

Including diamond tipped cutter.

EVA glue.



Machine	STREAMER 1053	STREAMER 1054	Options
Control	Compact control – rotating and swiveling control panel	Compact control – rotating and swiveling control panel	
Workpiece support			Extendible up to 600 mm
Premilling	х	2 cutter motors incl. 2 diamond cutters, working height 45 mm	2 premilling cutters with working height 60 mm
Edge feeder	For coils and strips with single infeed	For coils and strips with single infeed	Edge magazine with edge separation for strips
Glue application	Classical HOLZ-HER nozzle system (one glue cartridge) for EVA and PUR glue	Classical HOLZ-HER nozzle system (one glue cartridge) for EVA and PUR glue	Tracing nozzle
Pressure unit	3 pressure rollers, first roller with motor drive	3 pressure rollers, first roller with motor drive	Pneumatic pressure unit, plunge controlled
End trimming	1 x 0,22 kW, 200 Hz, 9000 min ⁻¹ , with manual adjustment for chamfering (0/10°)	1 x 0,22 kW, 200 Hz, 9000 min ⁻¹ , with manual adjustment for chamfering (0/10°)	End trimming unit with two motors pneumatic tiltable, working height 60 mm
Cutting	Multifunctional flush trimming, radius and radius outlet, incl. diamnond cutters	Multifunctional flush trimming, radius and radius outlet, incl. diamnond cutters	
Scraper			Smoothing of radii and chamfer on plastic edges
Glue scraper			Plunge controlled at top and bottom
Buffing			Buffing unit


Machine dimensions		
Overall length (mm)	3917	3917
Weight (kg)	930	1055
Feed speed		
Feed speed (m/min)	10	10
Working dimensions		
Workpiece thickness (mm)	6-45 (60)	6 – 45 (60)
Edge thickness (mm)	0,4-3(6)	0,4 – 3 (6)
880		

STREAMER

1053

STREAMER

1054

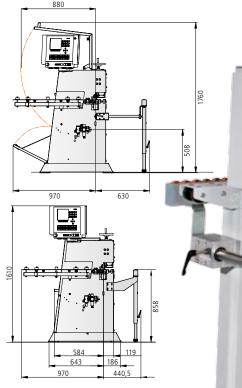

The technical data specified is intended for reference only. HOLZ-HER woodworking machines are subject to constant development and are therefore subject to modification without prior notice. The illustrations are therefore not binding. Some of the machines shown also contain special equipment not included as a standard feature. For clarity, some of the machines are shown without protective hood.

Standard

Not possible

Free space

Picture credits: © istock | lisegagne, © fotolia | Alexander Rochau

UK – HOLZ-HER 3143 30 – Printed in Germany/Imprimé en Allemagne Printed on: 22.06.2012 – First edition: 22.06.2012

Your authorized HOLZ-HER dealer

Optional



HOLZ-HER GmbH Plochinger Straße 65 72622 Nürtingen Germany

T +49 (0) 70 22 702-0 kontakt@holzher.com www.holzher.com