
Finger Joint

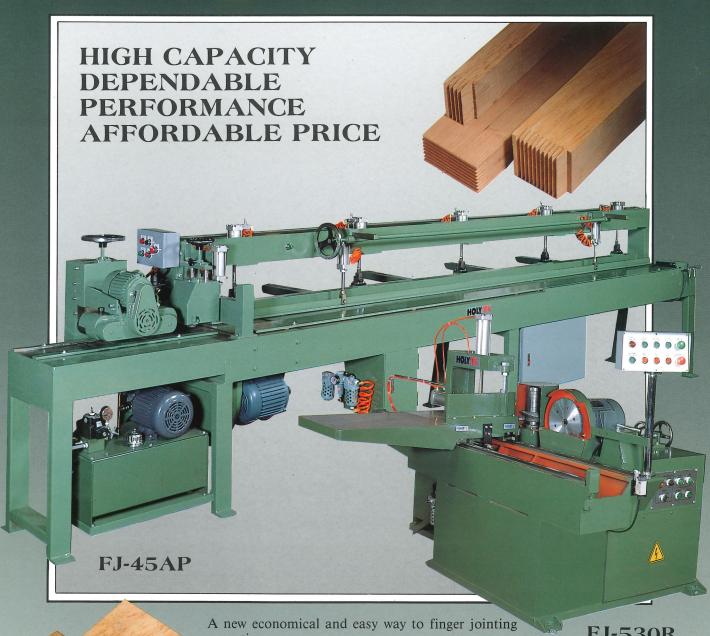

operation.

FJ-530R

HOLYTEK

FINGER JOINT



- The FJ-530L/R performs end trimming and shaping on right or left end of sticks.
- The rails furnished with linear motion guide ensure smooth traverse and high accurate cutting.
- Air-operated clamp comes down holding sticks firmly in place. Hydraulic operated for feeding ensures the max. stability.




FJ-15G

Gluing Machine (Air Pedal Control)


• Allowing for hand operated gluing machine for different pitch (3.7mm, 4mm etc.)


FINISH PRODUCTS:






THE FLOW CHART FOR FINGER JOINT SYSTEM

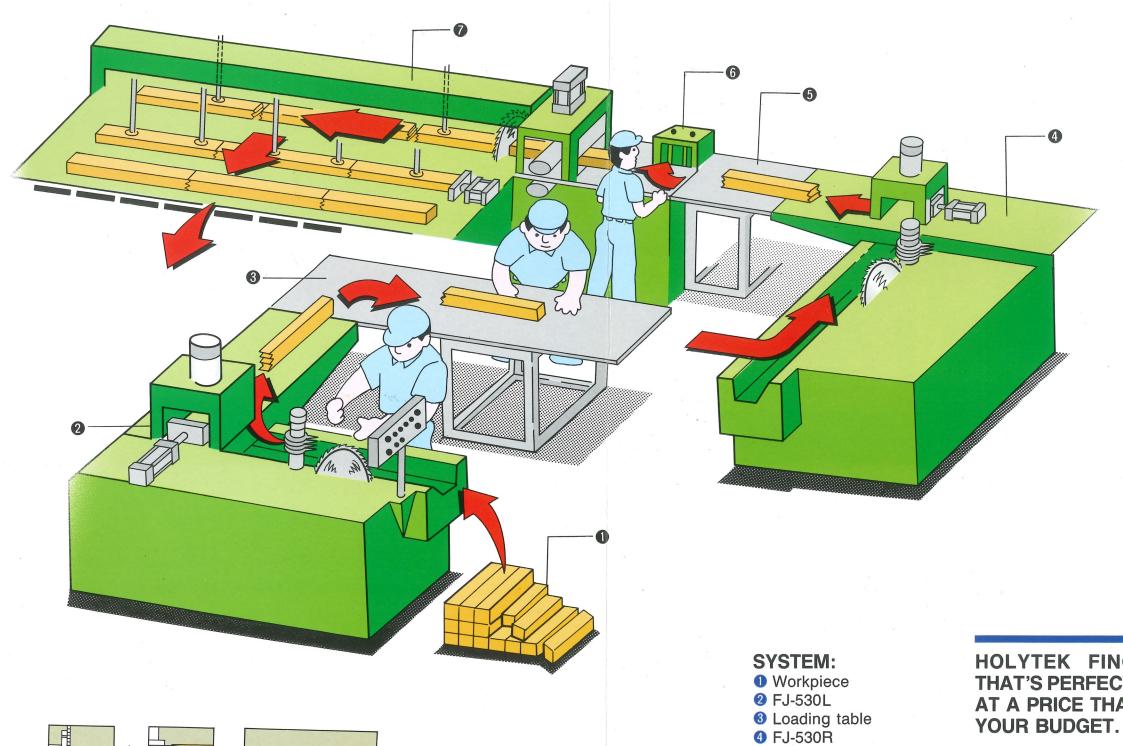



End trimming







Finished

- 6 Loading table
- **6** FJ-15G
- 7 FJ-45AP or FJ-45ASP

HOLYTEK FINGER JOINT M/C THAT'S PERFECT FOR YOUR JOBS. AT A PRICE THAT'S PERFECT FOR

We offer the finger jointing with efficiency, quality and dependability. Very easy to operate and low cost you would love.

HOLYTEK'S extensive experience in finger jointing technology background allows our machine providing an engineering excellence, that's perfect for your jobs.






FJ-45ASP

Super Auto. Finger Joint Assembler

- High speed and more efficient machine with top and bottom hydraulic driving motor and feeding is synchronized.
- When Press is continuing and the feeding for second sticks also will continue to save the time for waiting.
- Powerful hydraulic system and cutting off saw equipment are standard.
- More heavy-duty constructure and rigid design. The working length for FJ-45ASP is 4500mm and capacity is about 4pcs/per min.



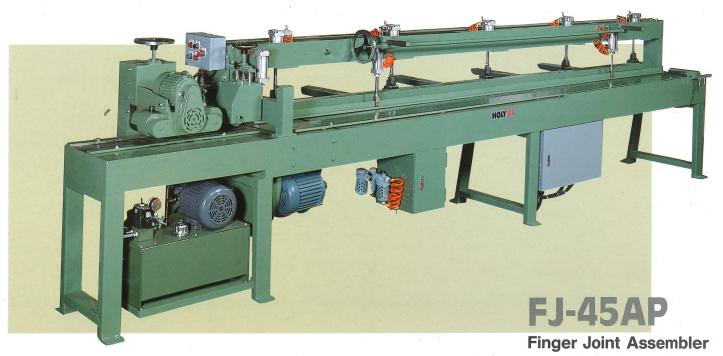

- The FJ-45AP assembler with air-operated clamp comes down holding and hydraulic pressing system.
- Furnished with cutting off saw as standard to the workpiece length is desired.
- Max. working length of jointed stick is 4500mm. The capacity is about 2pcs/per min. Other working length is upon request.

SPECIFICATION:

| FJ-530L/R FINGER JOINT SHAPER | |
|--|--|
| Motor of finger cutter Motor of trimming saw Motor of hydraulic pump Working capacity (L×W×H) Mini. length of workpiece Speed of trimming saw Speed of shaping cutter N.W./G.W. Packing size | 2HP 1000 × 380 × 150mm 200mm 3400RPM/60HZ 5000RPM/60HZ |
| FJ-15G GLUING MACHINE | |
| Air pedal control Max. working width Overall dimension N.W. | 540 × 480 × 1200mm |
| FJ-45ASP SUPER AUTO. FINGER JOINT ASSEMBLER | |
| Hydraulic driving motor for feeder Motor of cut off saw | 4500 × 150 × 75mm about 4pcs 1900kas/2200kas |
| FJ-45AP FINGER JOINT ASSEMBLER | |
| Motor of feeder | 1/4HP |

 Motor of cut off saw
 2HP

 Motor of hydraulic pump
 3HP

 Working capacity (L×W×H)
 4500×150×75mm

 Capacity of 4500mm length product per min.
 about 2pcs

 N.W./G.W.
 1600kgs/1900kgs



^{*} All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.