# cross Cut-Off Saw

### **BIGGER CAPACITY FASTER CUTTING** MATCH "CE" REGULATIONS



The HOLYTEK range of AUTOMATIC CROSS CUT-OFF SAWS ensure maximum output with maximum safety.

"CE" regulations.

HOLYTEK


## HOLYTEK




The Holytek HCS-18 and HCS-24 cross cut saws solve any cross cutting problems. The machines work SAFELY with PRECISION and EFFICIENCY.

The Optional infeed and outfeed roller tables with disappearing stops allows for accurate cutting all the time.

#### **HCS-24 CAPACITY CHART**

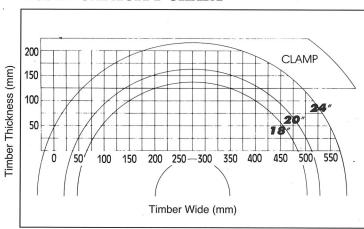

#### **HCS-18 CAPACITY CHART**

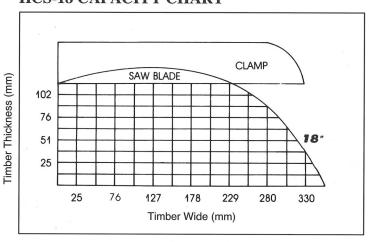



Saw activation is either foot pedal or two handed

Picture showing is right hand, the left hand upon

as requested.


requested.

**HCS-18** 

#### **SPECIAL ACCESSORY:**

- Infeed & outfeed conveyor table (4'/6'/8')
- Saw blade 18", 24"
- Safety clamp guard





#### SAFETY CLAMP GUARD

The optional safety clamp guard ensure maxinum safety .



Illustration of double start switch fitted as standard on HCS-24 and optional on HSC-18 .

#### SPECIFCATION

MODEL	HCS-18	HCS-24
Cycle operated	Pneumatic	Pneumatic
Saw blade	ø1"X18"X3.4 mmX120T	ø1"X24"X4.0 mmTX120T
Saw blade motor	7.5 HP	7.5 HP
Table size	670×710 mm	630×1150 mm
Saw blade speed (60 cycles)	3320 r.p.m.	3000 r.p.m.
Level height of table	840 mm	830 mm
Cycle speed (each min.)	40	40
Working air pressure	5 kg/cm <sup>2</sup>	5 kg/cm <sup>2</sup>
Packing size	870×910×1270 mm	750×1250×1500 mm
N.W/G.W.	360/420 kgs	480/550 kgs

st All specifications, dimensions and desing characteristics shown in this catalogus are subject to change without notice.

