

Wadkin FSP


180/220 FOUR SIDED PLANER

For
straightening
surfacing
and thickening
in **ONE PASS**


Features include—

- 2 metre long infeed table
- full cardan drive system
- large 80mm diameter outfeed bedroller
- pneumatically loaded and driven feedrollers, to allow short or long sections to be planed.

The machine comes complete with a full tooling pack, and is ready to use.

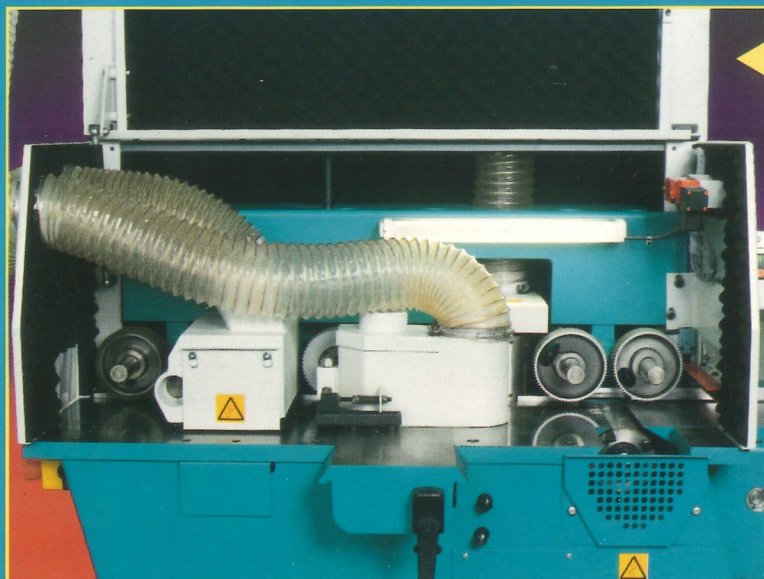

Both the near side and top head chipbreakers are of the Wadkin radial type ensuring maximum safety even with larger variations in timber sizes. The radial chipbreaker allows the ultimate in control of thin or narrow sections and eliminates unevenness on the end of the timber.

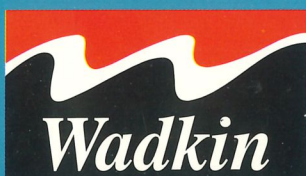

FSP 180/220 FOUR SIDED PLANER


Technical Information	FSP 180	FSP 220
Maximum finished size	180 x 220	220 x 120
Minimum finished size	15 x 6	15 x 6
Feed Speed	8m/min optional 5-15m/min	8m/min optional 5-15m/min
Feed motor power	1.5kW (2hp)	1.5 kW (2hp)
Spindle diameter	40mm Dia	40mm Dia
Maximum cut to fence and first bottom head	10mm	10mm
Cutting circles	All heads 125mm Dia	All heads 125mm Dia
Motor Power (Standard)	4kW (5.5hp) to bottom and top heads 5.5kW (7.5hp) side heads	5.5kW (7.5hp) to bottom and top heads 5.5kW (7.5hp) side heads
Motor Power (Optional)	5.5kW (7.5hp) or 7.5kW (10hp) to each position	5.5kW (7.5hp) or 7.5kW (10hp) to each position

As our policy is constantly to improve design, the details given in this leaflet are not to be regarded as binding. Certain models illustrated are of CE specification, please ask your local Wadkin representative for details of specifications to suit your area.


Certain illustrations show guarding removed for clarity.

Optional Features

- Larger spindle motor powers
- Brake motors instead of interlocking front cover
- Automatic star delta starting to all heads
- Driven outfeed bed roller
- Manual bed lubrication
- Electronic positioning of: top head and beam and near side head – with one touch controls to move in 0.1 mm increments for added accuracy
- Electronic positioning to both top head and near side head
- Dust connections
- 2.3m infeed table and fence
- Infinitely variable feed speeds (5-15m/min)
- Four knife tooling instead of two knife

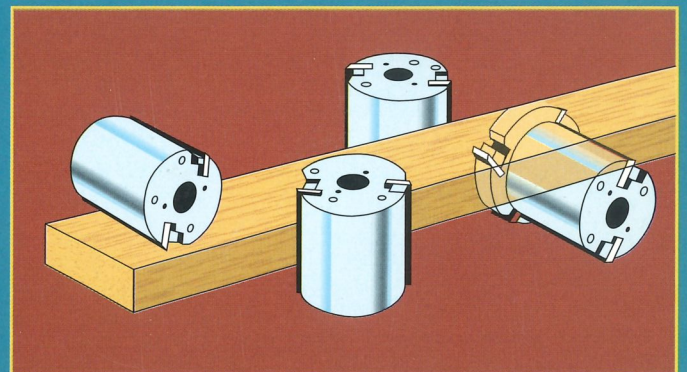


Overall Dimensions

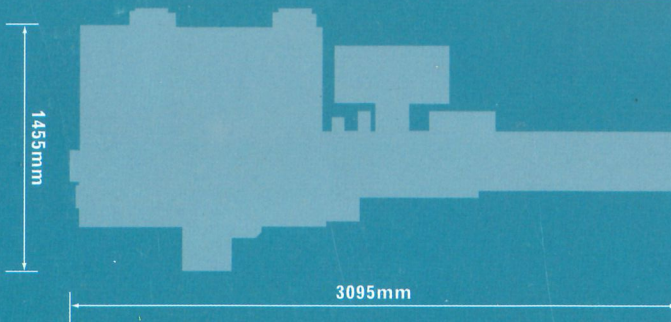

Minimum headroom requirement 1857mm



For more information, a quotation or a demonstration of the FSP or any other Wadkin woodworking machine, or if you like one of our sales engineers to call, contact



Wadkin Ltd
Green Lane Road
Leicester LE5 4PF
England.

Tel: 0116 2769111
Fax: 0116 2742310