





ZMM STOMANA JSC

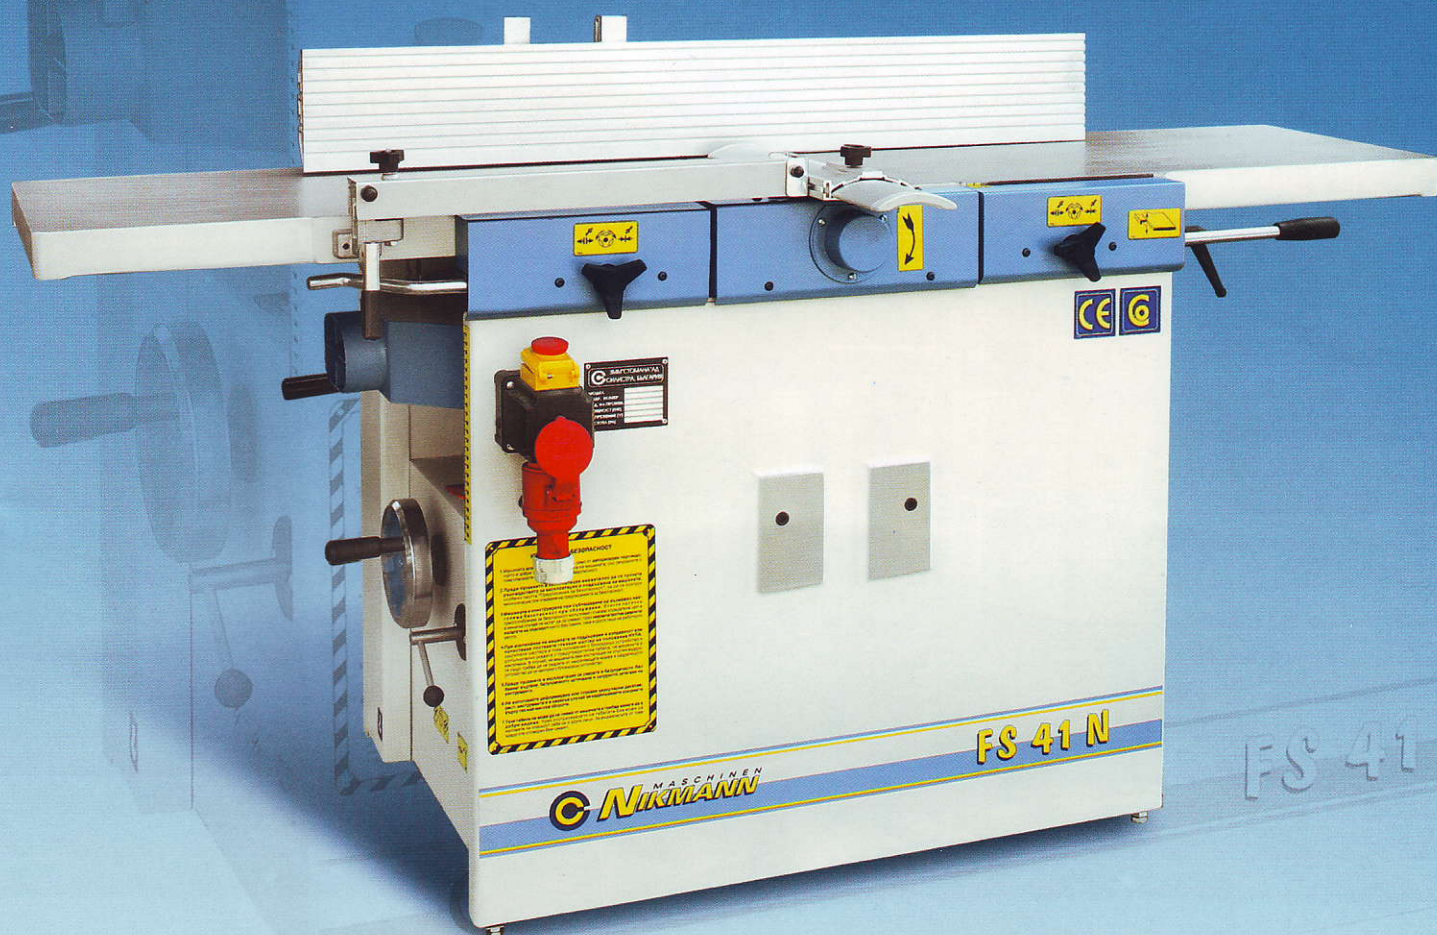


КОМБИНИРАНИ АБРИХТ-ЦРАЙХМУС МАШИНИ • KOMBINIERTE ABRICHT-DICKENHOBELMASCHINEN
COMBINED SURFACE PLANER-THICKNESSING PLANER MACHINES


FS 32 N; FS 41 N

- Чугунени плотове с шлифована повърхност
- Стабилен алуминиев линеал с наклон от 90° до 45°
- Предпазител за ножовия вал
- Маса на щрайхмуса с ролки /FS 41/
- Маса на щрайхмуса с централна водеща колона и опора
- Graugußtische mit geschliffener Oberfläche
- Stabiler Abrichtanschlag schwenkbar von 90° bis 45°
- Messerwellenschutz
- Dickentischwalzen /FS 41/
- Dickentisch mit mittiger Säulenführung und Abstützung
- Cast-iron boards with grinded surface
- Stable aluminum fence with tilt from 90° to 45°
- Cutter block protector
- Thicknessing planer working table with rollers /FS 41/
- Thicknessing planer working table with a central guiding column and a support

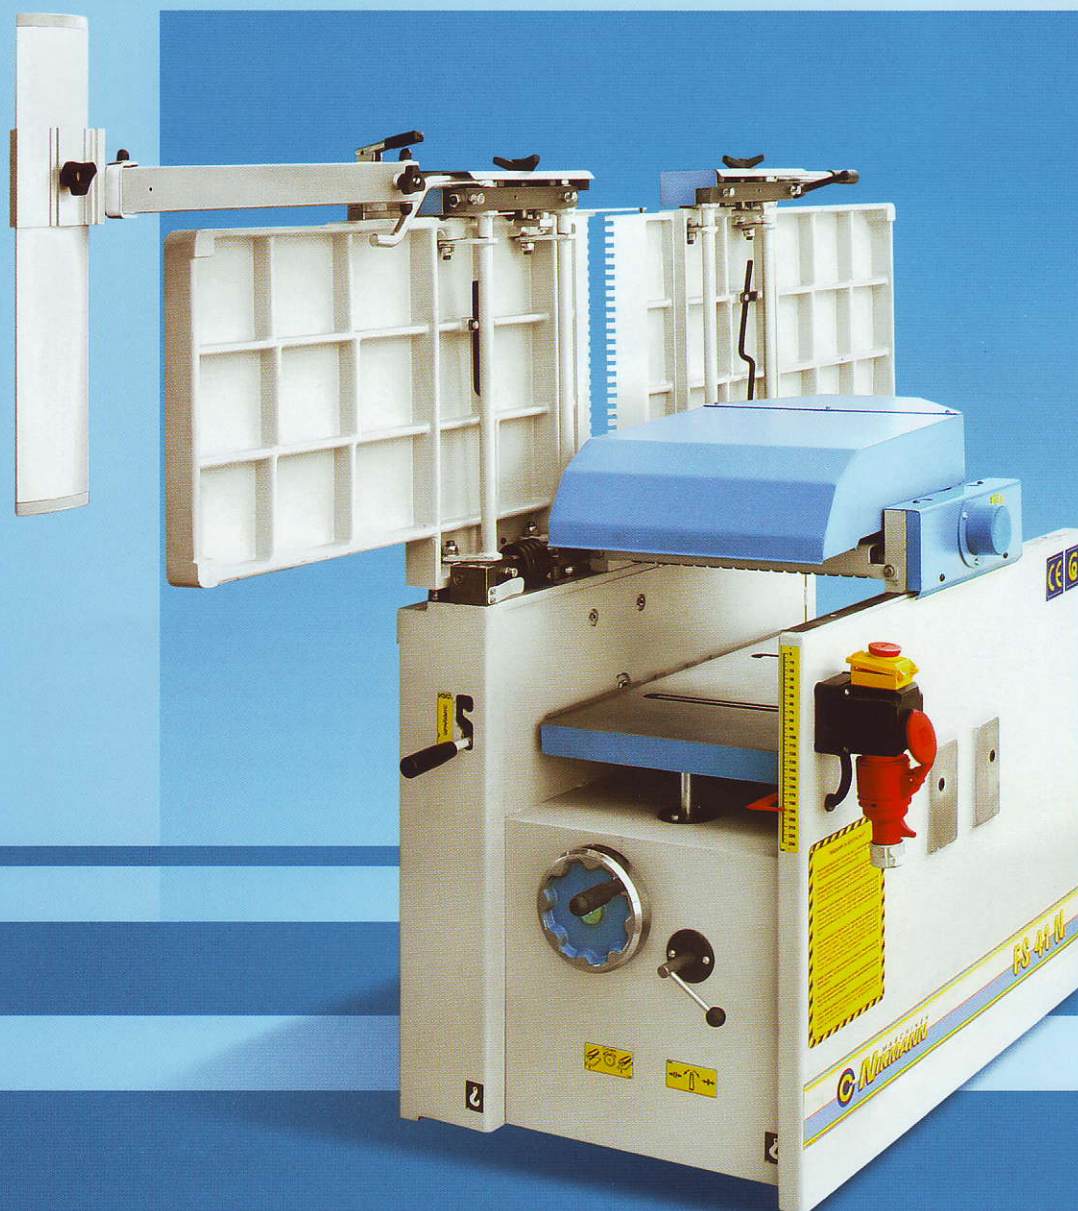


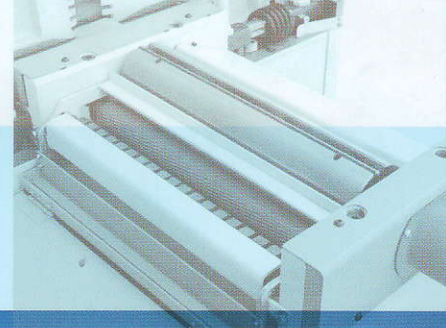

АБРИХТ- ЩРАЙХМУС МАШИНА	ABRICHT- und DICKENHOBEL MASCHINE	SURFACE PLANER-THICKNESSING PLANER	FS 32 N	FS 41 N
АБРИХТ	ABRICHTHOBEL	SURFACE PLANER		
Размери на работната маса, mm	Tischabmessung, mm	Working table dimensions, mm	1500x320	1800x410
Максимална дебелина на отнемания слой, mm	Max. Spanabnahme, mm	Max. depth of cut, mm	5	5
Диаметър на ножовия вал, mm	Hobelwellendurchmesser, mm	Diameter of the cutter block, mm	100	100
Брой ножове	Hobelmesser	Number of cutters	3	4
Размери на алуминиевия линеал, mm	Abrichtanschlagabmessung, mm	Dimensions of the aluminium fence, mm	1100x115	1100x115
ЩРАЙХМУС	DICKENHOBEL	THICKNESSING PLANER		
Размери на работната маса, mm	Tischabmessung, mm	Working table dimensions, mm	316x700	406x700
Максимална дебелина на отнемания слой, mm	Max. Spanabnahme, mm	Max. depth of cut, mm	4	4
Скорост на подаване, m/min	Vorschubgeschwindigkeit, m/min	Feeding speed, m/min	8	8
Дебелина на обработвания детайл, min/max, mm	Dickendurchlass, min/max, mm	Depth of detail, min/max, mm.	4-225	4-225
ОБЩИ ТЕХНИЧЕСКИ ДАННИ	GENERAL TECHNISCHE DATEN	GENERAL TECHNICAL DATA		
Мощност на двигателя, kW (HP)	Motorleistung, kW (PS)	Motor power, kW (HP)	3.0 (4.0)	3,0 (4.0)
Обороти на ножовия вал, min ⁻¹	Hobelwellendrehzahl, min ⁻¹	Revolution of the cutter block, min ⁻¹	4500	4500
Тегло, kg	Gesamtgewicht, kg	Weight, kg	420	450

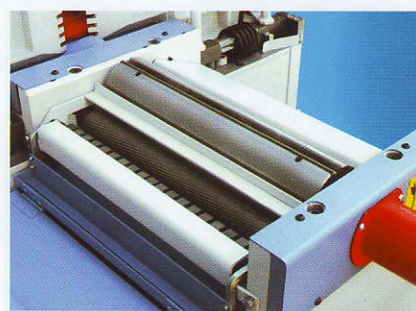


Ножов вал • Messerhobelwelle
Cutter block

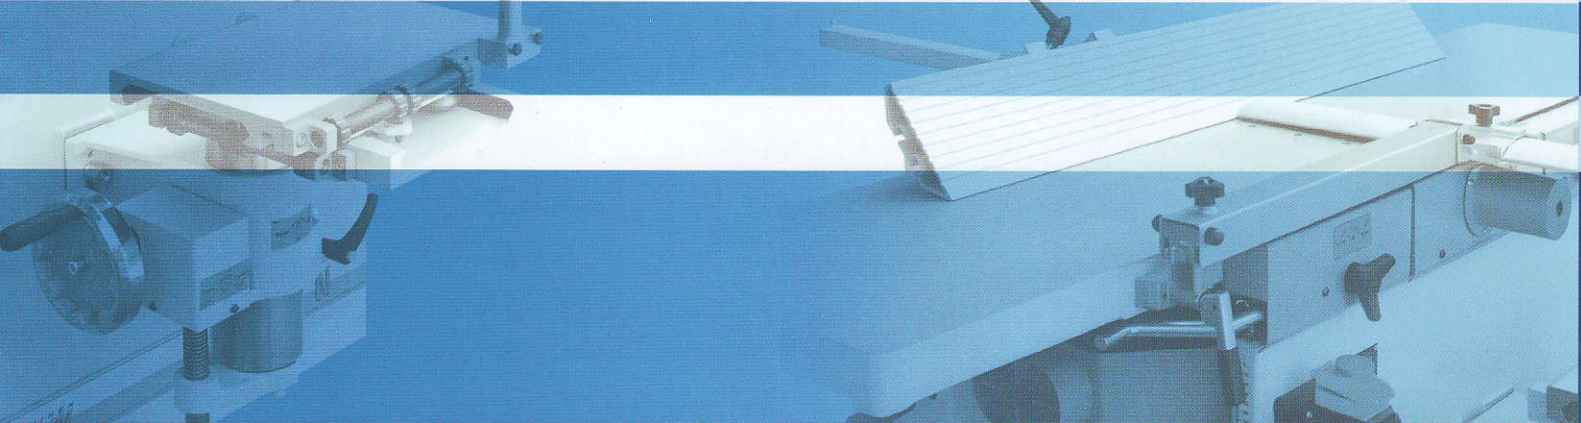


Опции • Optionen • Options



Боранарам
Langlochbohrereinrichtung
Mortiser

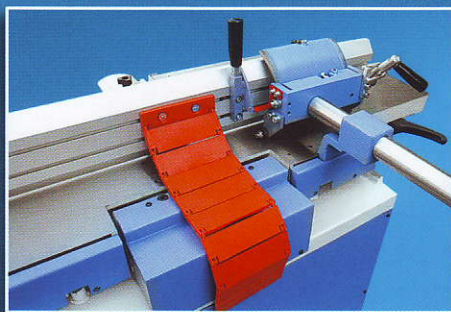

Професионален линеал
Profi Abrichtanschlag
Professional fence

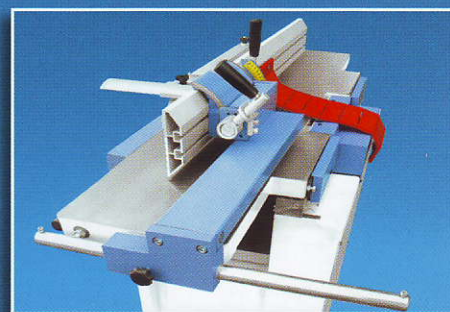

Професионален страничен линеал
Profi Seitenabrichtanschlag
Professional side fence



Наклон на линеала от 90° до 45°
Abrichtanschlag von 90° auf 45° schwenkbar
Fence tilting from 90° to 45°

Опции • Optionen • Options

- Боранарам • Langlochbohrereinrichtung • Mortiser
- Двигател 4.0 kW (5,5 HP) • Motorleistung 4.0 kW (5,5 PS) • Motor power 4.0 kW (5,5 HP)
- Патронник WESTCOTT 0-16mm • WESTCOTT Bohrfutter 0-16 mm • Chuck WESTCOTT 0-16 mm
- Количка • Fahreinrichtung • Wheel set
- Професионален линеал • Profi Abrichtanschlag • Professional fence
- Професионален страничен линеал • Profi Seitenabrichtanschlag • Professional side fence
- Погаване на шрайфмуса с мотор-пегуктор /гвускоростен мотор/ - 6/12 m/min • Vorschubgeschwindigkeit mit Schneckengetriebe /Zweigeschwindigkeitsmotor/ • Feeding of the thicknessing planer with motor-gear /2-speed motor/ - 6/12 m/min

7500 Силистра
ул. "Тутраканска" №16

тел.: 086/821 058
пласмент: 086/821 052
факс: 086/821 071
e-mail: stomana@ b-trust.org
stomana@ mbox.contact.bg
www.stomana.dir.bg

16, Tutrakanska Str.
7500 Silistra, BULGARIA

tel.: +359 86/821 058
sales: +359 86/821 052
fax: +359 86/821 071
e-mail: stomana@ b-trust.org
stomana@ mbox.contact.bg
www.stomana.dir.bg

