

cefla finishing
delle vedove
düspohl
falcioni
sorbini

FLEXISPRAY is a linear spraying machine, for the finishing of all types of mouldings as well as the application of solvent based, water based and UV paints and lacquers. It has taken its origin in a modern, avant-garde and ergonomic project, employing particularly versatile and flexible technological solutions: its characteristics are ease of use,

containment of emissions and product recovery. The possibility to exchange the whole central unit, containing tanks and guns, makes the machine highly flexible and therefore ideal for users who expect to have different lacquers and profile shapes, as change-over times in production are extremely short.



PLUS AND BENEFITS

- Solvent proof PVC belt conveying at infeed and outfeed, controlled by means of inverter.
- Control unit enables electronic setting and control of spray gun operation.
- Three (3) overspray collection and recovery tanks are easily removed for cleaning.
- The tank conformation makes for easy product recovery after spraying.
- Exhaust air filtration system utilizes a double set of dry filters made of disposable paper to remove solid particulate matter from the exhaust air stream.
- Equipped for installation of six (6) spray guns in a 3+3 configuration on double feeding circuits.
- Booth enclosure for protection of spray chamber with easy opening access door for cleaning and inspection.
- Electronic and pneumatic control board are integral to the machine frame work, and prearranged for in-line insertion.


cefla finishing
delle vedove
düspohl
falcioni
sorbini

AVAILABLE OPTIONS

- 1) Spraying equipment.
- 2) Stainless steel tanks.
- 3) 36C = Extractable trolley on wheels, containing tanks.
- 4) 36 QC = Extractable trolley on wheels, containing tanks and guns.

TECHNICAL FEATURES

- Adjustable speed, by means of inverter:
from 20 to 60 m/min
- Working width: max. 200 mm.
- Working length: min. 800 mm.
(on request 400 mm)
- Working thickness: max 60 mm.

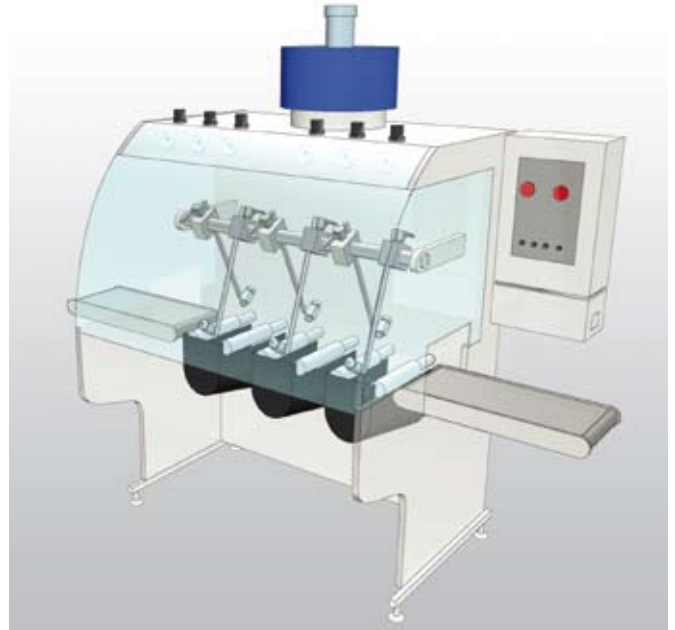

TECHNICAL SPECIFICATIONS

	Electric power kW	Compressed air NI/min	Air make-up mc/h	Solvent exhaust mc/h
FLEXISPRAY 36	1,30	5	4500	4500
FLEXISPRAY 36 C	1,85	5	4500	4500
FLEXISPRAY 36 QC	1,85	5	4500	4500

Pursuing the constant improvement of its production range, the manufacturer reserves the right of modifying its products without notice. Additionally, the information, the technical specifications, the drawings and the pictures shown in this brochure serve just as an indication and are not binding for the manufacturer who expressly reserves the right of changing this brochure without notice.