

LamiNator


► Also available with slot nozzle for PUR adhesives ◀



For laminating/doubling of sheet and reel materials using PVAc adhesives

Features

- High production speed.
- Frequency-controlled drives.
- Rubber-coated adhesive application roller and stainless steel dosing roller.
- Dosing can be adjusted centrally and be reproduced via a digital display.
- Effective drying zone with groups of switchable IR modules.
- Unwinding station with automatic web tension control.
- Laminating zone with heated steel pressure rollers.
- Integrated winding station.
- Telescopic switch cabinet.

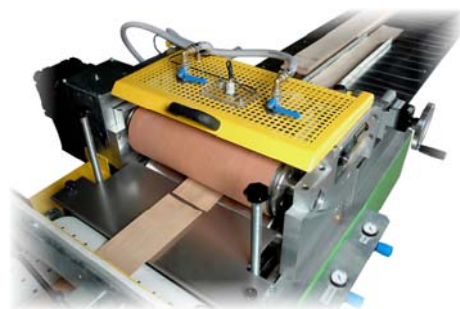

Roller application system for PVA adhesive

Specifications

Max. reel width	400/700/1000 mm
Max. reel dia.	700 mm
Transport speed	5–40 m/min

Possible working widths 400 and 700 mm