

THE REVOLUTIONARY **NEW** ZERO EDGE TAPE APPLICATION SYSTEM

HyFuse

PATENT PENDING

Easy to Retrofit to edgebanders with pre-milling

Instant
changeover
between glue
& Hyfuse

Fantastic
seamless finish

No heat up time

No cleaning
work required



Energy use only
10% of a hot air
system

Very consistent
simple to
control

Quiet

Affordable


HYFUSE 5LM TAPE APPLICATION UNIT SPECIFICATIONS:

Up to 30mm board at 20m/min.

Maximum tape width 40mm (Panel thickness 36mm).

Air supply only 50L/per min required. (6mm hose)

Hydrogen to be supplied from D size hire gas bottle.

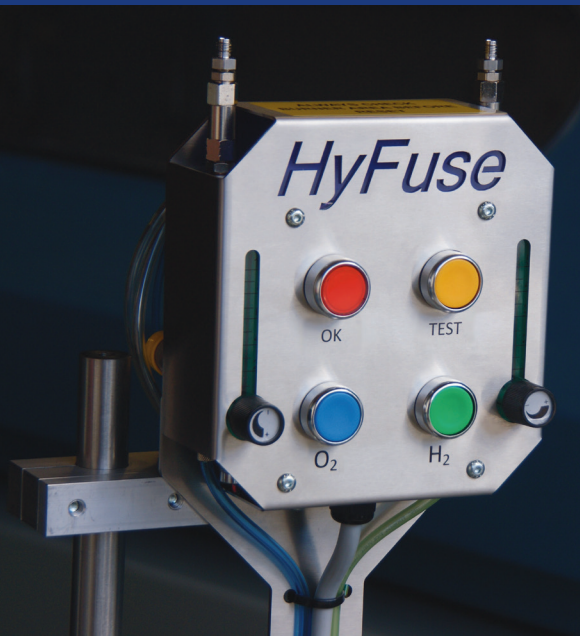

WHAT OUR CUSTOMERS SAY:

"We have been running edgebanders for 30 years and the commissioning of the HYFUSE technology has, in my opinion, been the most significant advance in that period, particularly the ease to achieve a seamless finish without a need for cleaning."

Graham Russell -Managing Director, Greenmount Espies Ltd—Auckland, New Zealand

"We have now been running HYFUSE for 6 months and have found it to be extremely reliable and consistent with no maintenance."

Paul Rusbatch Joinery Manager, ITM Joinery, Kitchens & Doors—Motueka, New Zealand