


RO VER A EDGE

NC EDGEBANDING
MACHINING CENTRE

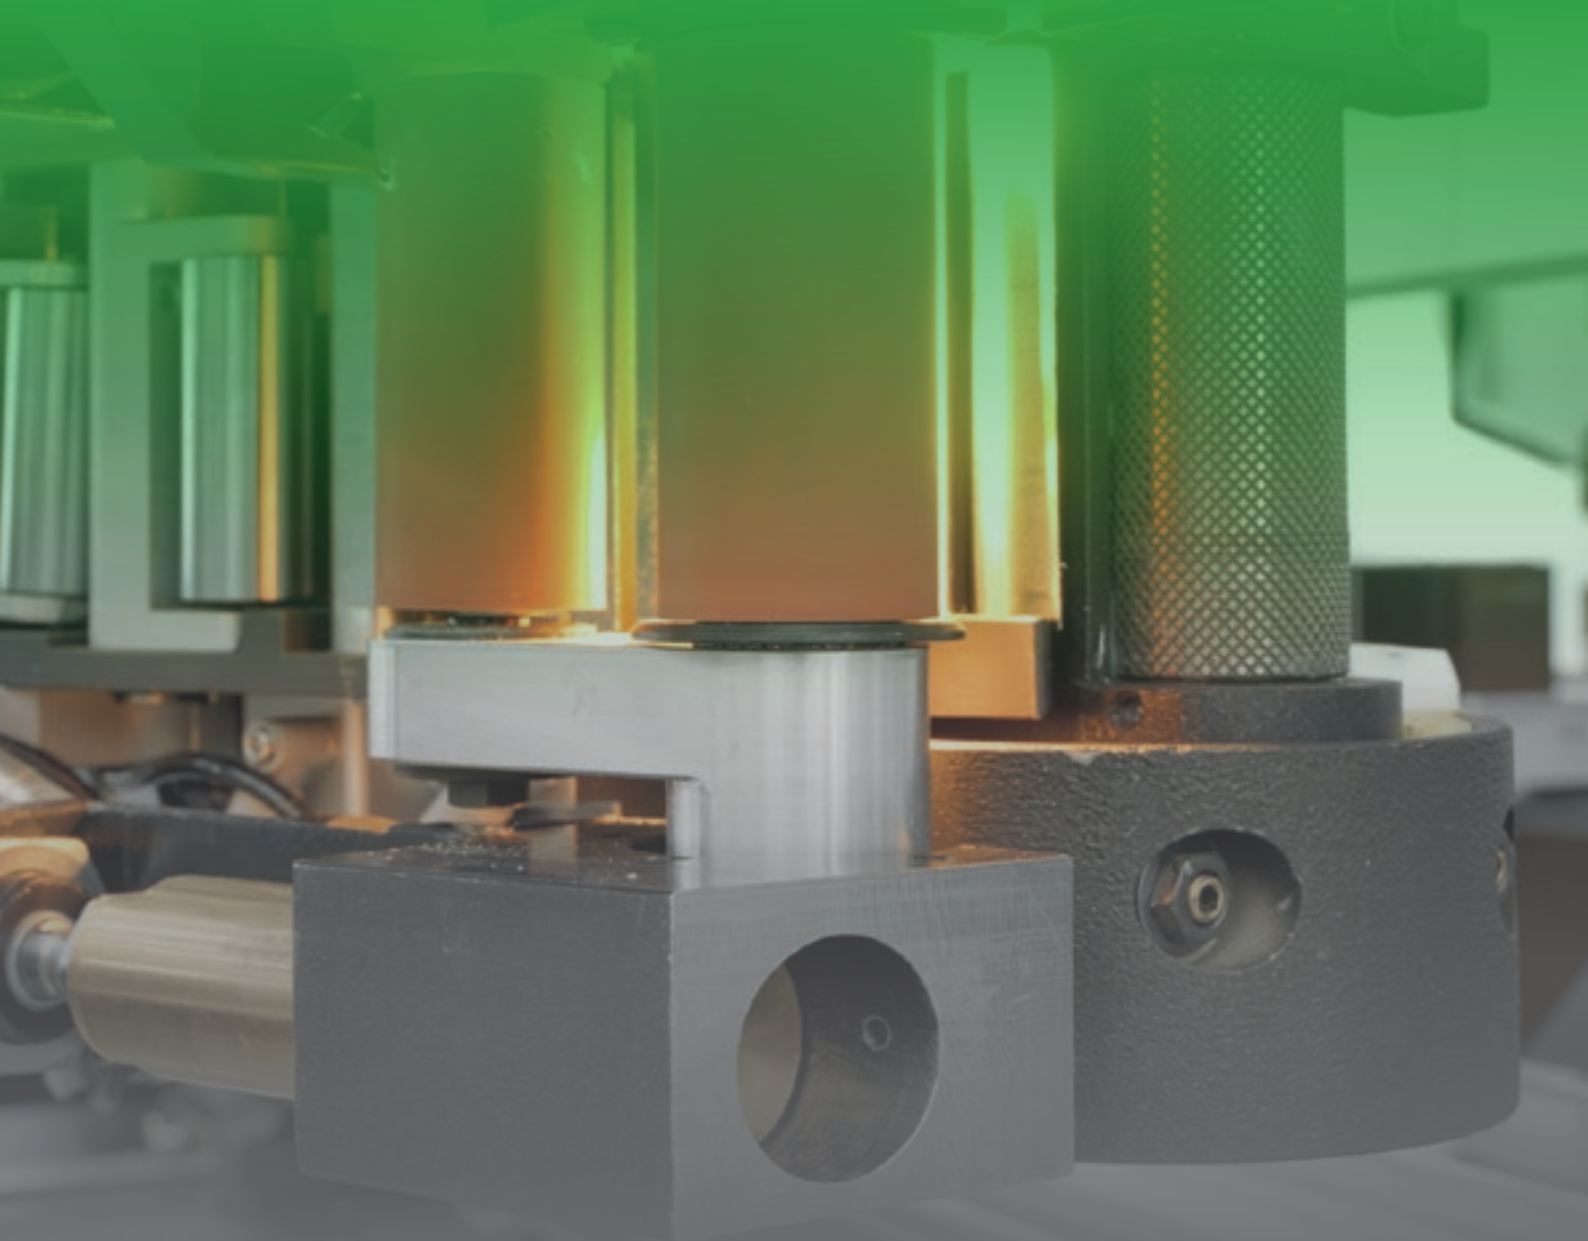

 **BIESSE**

MANUFACTURING SHAPED AND EDGEBANDED PANELS WITH A SINGLE MACHINE



THE MARKET DEMANDS

a change in manufacturing processes which enables companies to **accept the largest possible number of orders**. This is coupled with the need to maintain high quality standards whilst offering product customisation with **quick and defined delivery times**, as well as responding to the needs of highly creative designers.

BIESSE RESPONDS

with **technological solutions** that influence and support technical expertise as well as process and material knowledge. **Rover A Edge** is an edgebanding machining centre that supports the machining of shaped panels, which can be edgebanded on a single, compact, high performance machine. It is ideally suited to small and large joineries that need to manufacture either odd size products or standard size products in small batches.



ROVER A EDGE

- ✓ MACHINE CUSTOMISATION DEPENDING ON PRODUCTION REQUIREMENTS
- ✓ OPTIMAL EDGE GRIP
- ✓ CYCLE TIME REDUCTION AND PRODUCTIVITY INCREASE
- ✓ OPTIMAL FINISH QUALITY
- ✓ REDUCED TOOL CHANGE OVER TIME
- ✓ HIGH-TECH BECOMES ACCESSIBLE AND INTUITIVE.

MACHINE CUSTOMISATION DEPENDING ON DIFFERENT PRODUCTION REQUIREMENTS

A team of specialised sales engineers can understand production requirements and suggest the optimal machine configuration.





4-AXIS CONFIGURATION.



A full configuration of the working unit supports the execution of different types of machining operations whilst ensuring a high finished product quality.



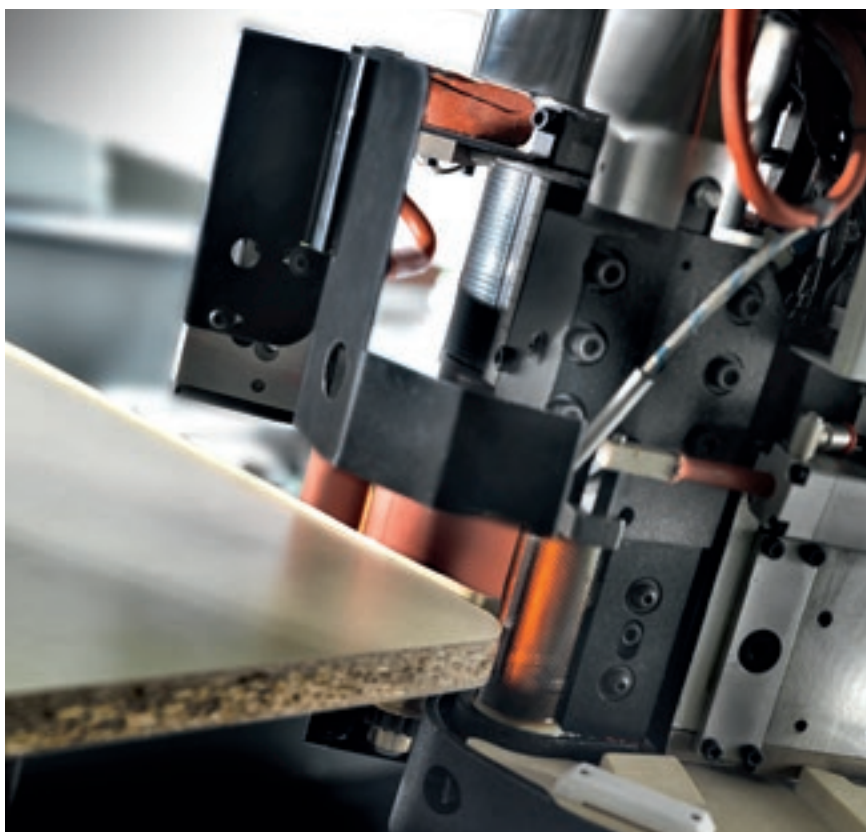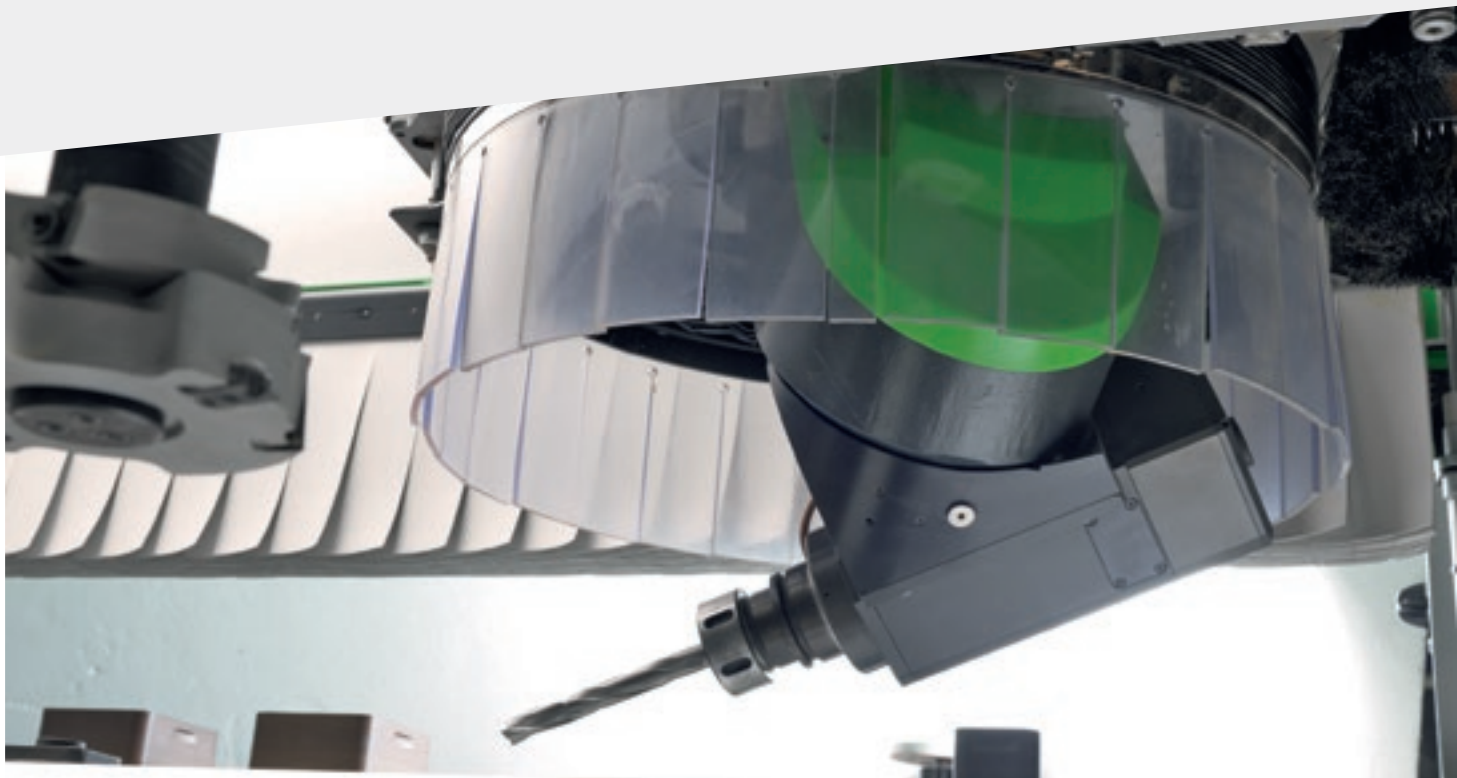


5-AXIS CONFIGURATION.



The **cutting-edge** 5-axis working group supports the machining of pieces with complex shapes, ensuring quality and precision.

OPTIMAL EDGE GRIP

Optimal edge pressure quality during gluing on shaped panels thanks to the twinroller edge pressure system.

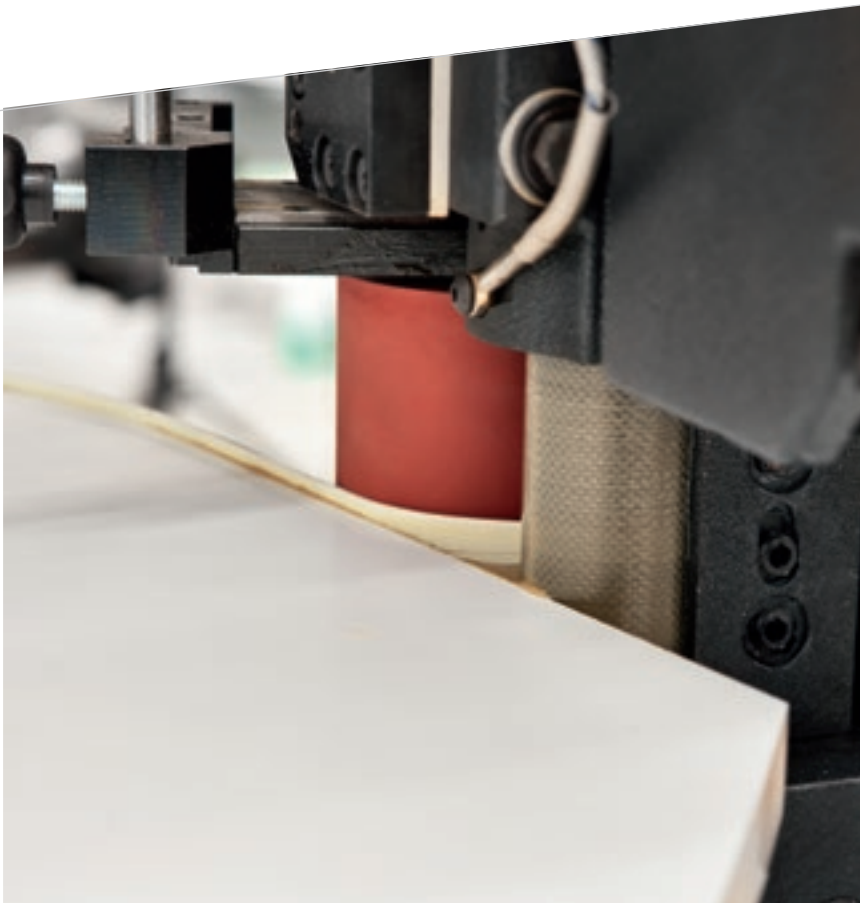

Similar to line edgebanding machines, the glue is applied directly onto the panel in order to ensure optimal adhesion quality. It supports the use of thin or transparent (3D) edges, as well as thicker and sturdier edges.



Glue feed occurs during the machining process via the granule feeding system within an integrated glue head. With the glue being stored in granules, only the required quantity is released for melting. This ensures optimal adhesion whilst preserving the glue characteristics.

**FIRM,
STABLE ADHESION**



Biesse offers specific solutions for the use of polyurethane glues resistant to heat, humidity and water



Nordson pre-melter for high production needs. An exclusive direct injection system for non-stop machining operations at high speed and consumption levels.



Presser roller quick changeover kit with reduced diameter version. This ensures the correct pressure is delivered when switching from thick to thin edges as well as small radius curves.



Additional glue pots fitted with quick-release electrical system for PU granule adhesives.

ROVER EDGE

ROBUST EDGEBANDING

Maximum bonding, possibility of applying thin edges and 3D transparent edges, easy maintenance and panel cleaning during the machining cycle.

Edgebanding has always been based on applying glue directly to the panel; Biesse has followed this principle and applied it to straight edgebanding as well as shaped edgebanding performed by machining centres.




SOLUTIONS THAT INCREASE MACHINE PRODUCTIVITY




The automatic edging feeder, mounted on the X carriage, allows the user to change between thin or thicker edges during the same machining cycle. Thin



Quick change of the coils with the banding material container positioned outside the safety fences.

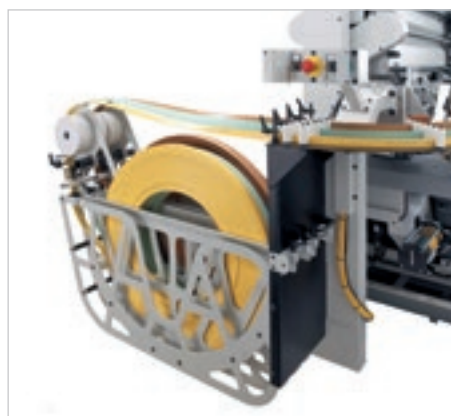

Thin or thick edges, either pre-cut or coiled, with automatic or manual feeding.

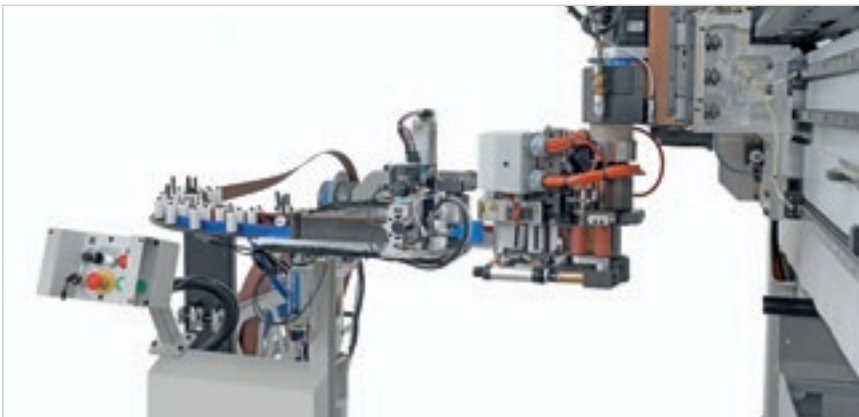

Y dual axis to carry out tool changes and edge feeding during machining.



Independent Z dual axis to efficiently support different types of boring heads for 9, 24 or 30 drills or multi-function tools.



16 position tool magazine for edge-banding operations.

MANY SOLUTIONS FOR PERFECT FINISHES

Edgebanding strip finishing aggregate with three functions. High feed and rotation speed, up to 14000 rpm. Particularly suitable for machining panels with a delicate or glossy surface, or with a protective film.



FINISHING AGGREGATES FOR EDGEBANDING OPERATIONS



A COMPLETE RANGE OF AGGREGATES FOR ALL MACHINING OPERATIONS



MAXIMUM ADHESION BETWEEN THE EDGEBANDING STRIP, GLUE AND PANEL, AND OPTIMUM FINISH.



Blower and anti-adhesive liquid dispensing aggregate.



Brusher aggregate with glue removal liquid dispenser.



Cold or hot air blower unit to brighten up the colour of the edgebanding strip.



Blower unit.



4-outlet blower unit for edgebanding strip finishing aggregates.

REDUCED TOOL CHANGEOVER TIME

The Biesse work table is guaranteed to hold the work piece securely in place and ensures quick and easy tool changeover.

OVER 1500 PROCESSING CENTRES SOLD WITH EPS.



Hyperclamps
for rigid and precise locking.



SA (Set Up Assistance)
The assisted set-up system, indicates to the operator where to position the panel, pods and rails to avoid potential collisions with the tool.



EPS (Electronic Positioning System)
supports the automatic reconfiguration of the entire work area in less than 30 seconds. Positions work tables and carriages by means of separate motors, i.e. without engaging the operating section. The positioning of the area's pods and rails is performed during machining, whilst the machine is working on the opposite area.

THE MACHINE CAN HOUSE UP TO 28 AGGREGATES AND TOOLS.



It is possible to switch from one machining operation to the next with no need for operator intervention for tool changes, thanks to the large number of tools and aggregates available in the tool magazine.



Quick and easy boring head change thanks to the exclusive spindle snap-on coupling system.



Facilitated access during tool change operations thanks to the **openable front cowl**.

RAY FORCE SYSTEM

UNPARALLELED TECHNOLOGY

Biesse's high technology responds to increasingly complex market demands by developing an all-new technology like none other of its kind for the application of edgebanding strips on shaped panels: RAY FORCE SYSTEM. Its revolutionary nature is based on an incomparable technique which uses infrared lamps to fuse a reactive layer. A solution that is comparable to Air Force System technology applied to linear edgebanding.

The advantages are unmatched:

- maximum quality of finish,
- reduced energetic consumption,
- ease of use.

RAYFORCESYSTEM



BIESSE

RAY FORCE SYSTEM

ABILITY TO PROCESS LARGE SIZES

The open front cowl supports the loading of very-large sizes (up to 2100 mm in y axis) onto the machine, thus enabling the pre-sectioning phase to be omitted or machining operations to be performed for non-standard products.




The cross-head thickness tracer enables operators to measure panel dimensions with absolute precision.




Choose from a comprehensive range of bed sizes to facilitate the machining of all panel sizes.

Rover A 1632
Rover A 1643
Rover A 1659

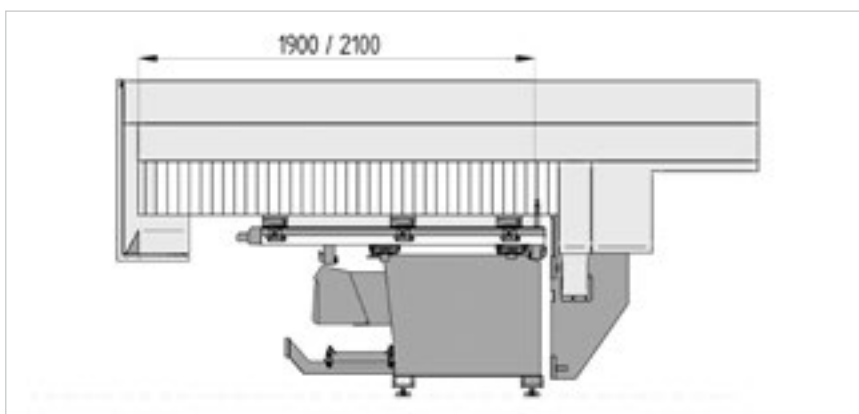



Two machines in one: the full functionality and quality of a true pantograph table are guaranteed by the **CFT (Convertible Flat Table)**, which supports the machining of thin panels, nesting and folding.

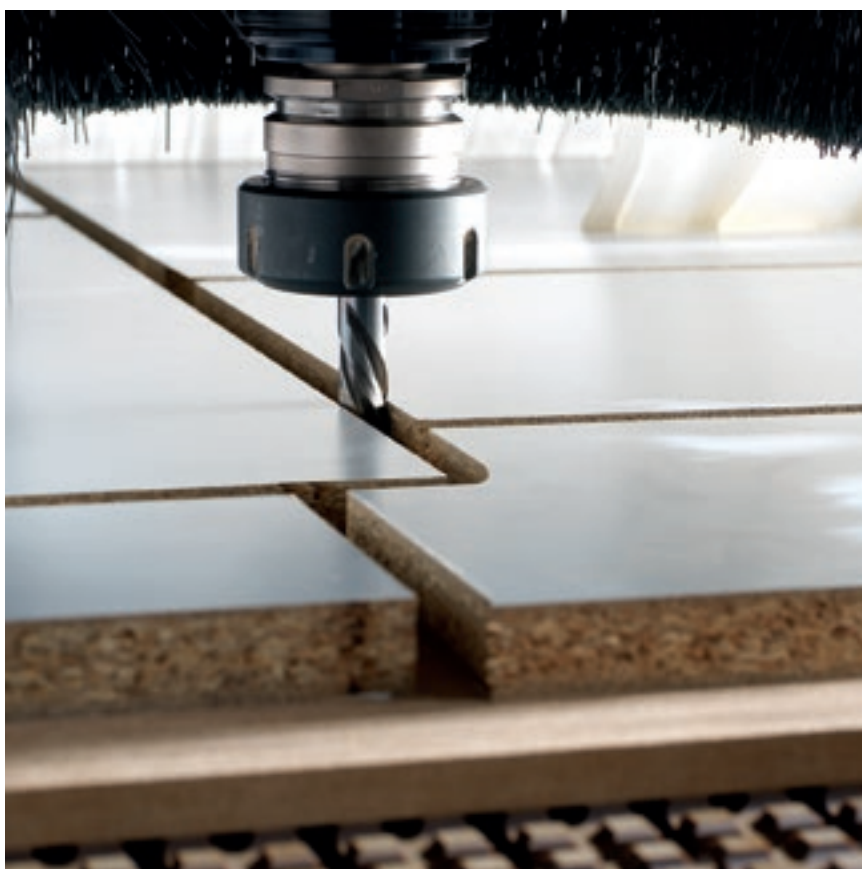

MAXIMUM OPERATOR SAFETY

Safety and flexibility thanks to the new bumpers combined with photocells with no footprint and dynamic tandem loading.



Pressure-sensitive floor mats enable the machine to operate at constant maximum speed.



Side curtain guards to protect the working unit, which are movable to enable the machine to work at maximum speed in total safety.



Remote control panel for direct and immediate operator control.

Maximum visibility of machining operation. LED bar with 5 colours showing machine status in real time.



OPTIMAL CLEANING OF MACHINED COMPONENTS AND WORK AREA



Motorised conveyor belt for the removal of chips and waste.



NC controlled chip **deflector**.



6-position (for 4 axes) and 13-position (for 5-axes) adjustable suction hood with deflector (chip conveyor) managed via NC.

THE MOST ADVANCED TECHNOLOGY CLOSE AT HAND



BPAD

Wi-Fi control console for performing the key functions required during the preparation of the working area and the tooling of the working units and tool holder warehouses.

The bPad is a valuable tool for supporting teleservicing, courtesy of the camera and bar code reader functions.



BTOUCH

The new 21.5" touch screen which enables you to carry out all of the functions previously performed using the mouse and the keyboard, enhancing the direct interaction between the user and the device. Perfectly integrated with the bSuite 3.0 interface (and with later versions) and optimised for touch, this solution is incredibly simple, and makes the best possible use of the Biesse software functions installed on the machine.

BPAD AND BTOUCH ARE AN OPTIONAL FEATURE WHICH CAN ALSO BE BOUGHT AFTER PURCHASING THE MACHINE, IN ORDER TO IMPROVE THE FUNCTIONALITY AND APPLICATION OF THE TECHNOLOGY AVAILABLE.

INDUSTRY 4.0 READY



Industry 4.0 is the new industry frontier, based on digital technologies and on machines that speak to companies. The products driving this revolution can communicate and interact independently within production processes, which in turn are connected via intelligent networks.




Biesse is dedicated to transforming the factories owned by our customers into real-time factories that are ready to provide digital manufacturing opportunities. Intelligent machines and software become indispensable tools that facilitate the daily work of those who machine wood and other materials on a daily basis.


INDUSTRY 4.0 READY

WORKING UNIT CONFIGURATION


4-AXIS CONFIGURATION

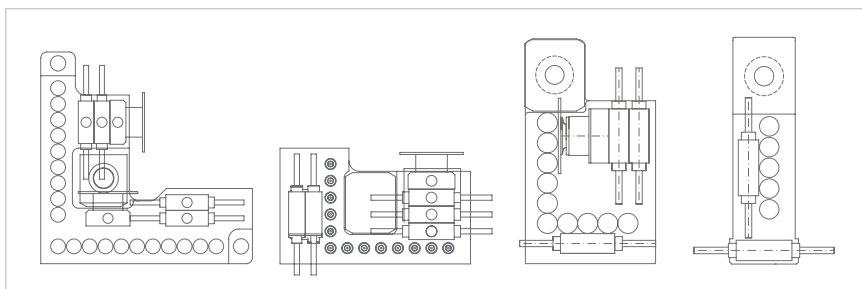


Available boring heads from 9 to 30 drill positions:
BH30 2L - BH24 - BH17 L - BH9.

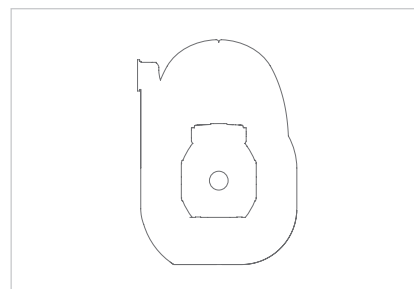


Milling unit with air or liquid cooling, ISO 30, HSK F63 and HSK E63 couplings and power from 13.2 to 19.2 kW.

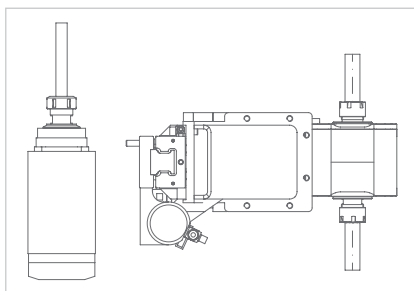


Horizontal 1 or 2 outlet milling units.

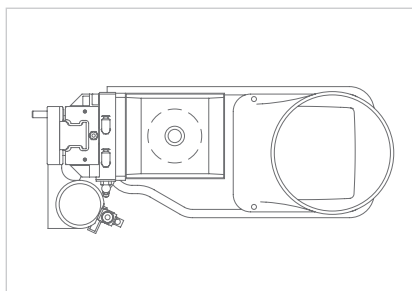


6 kW vertical milling unit.

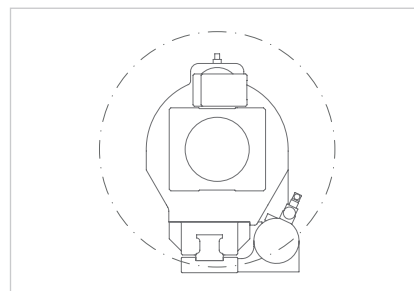


Multi-function, with 360° rotation.

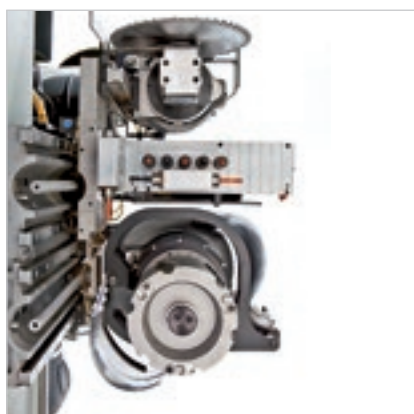


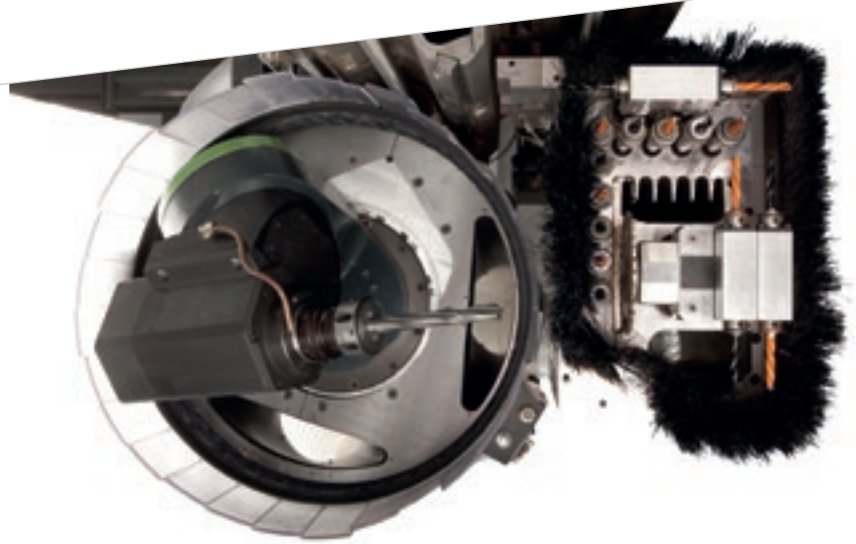

5-AXIS CONFIGURATION

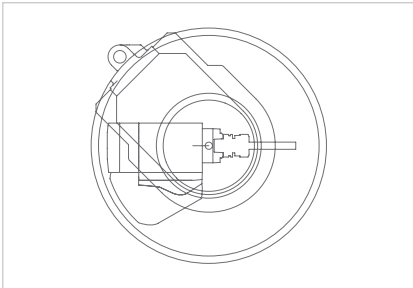

5 axes 13 kW with 24000 rpm
or 16 kW with 18000 rpm.

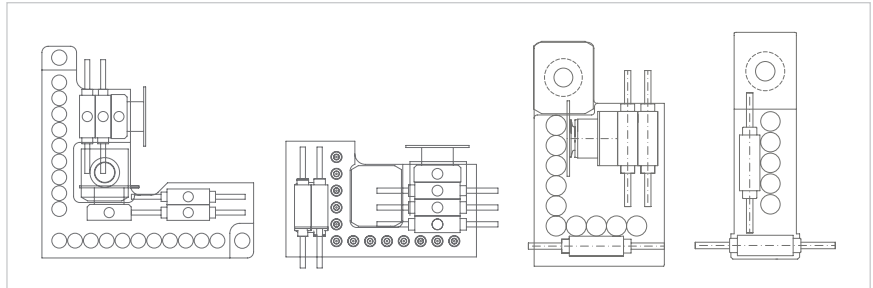

Available boring heads from 9 to 30 spindles:
BH30 2L - BH24 - BH17 L - BH9.



LOADING AND UNLOADING SOLUTIONS

Automated cell for machining a batch of panels or doors.

Synchro is a handling device with 4 controlled axes which are actioned by the Rover machining centre. It collects the panels to be machined from a stack, positions them in reference to a point of origin provided by the machining centre and, once the machining operation is complete, deposits them in an area designed to accommodate the stack of machined panels. The working cycle is executed in automatic mode until the entire batch to be processed is complete.



Panel pick-up device with automatic positioning of the suction cup holder rods


In accordance with the size of the panel to be picked up:

- ▶ no operator intervention is required to attach or remove the suction cup holder rods
- ▶ Idle time during format change operations is dramatically reduced
- ▶ the risk of collisions caused by incorrect tooling operations is reduced.



Device for the removal of porous panels or those with special finishes

It increases the reliability and the repeatability of the automatic cell operation cycle, even when machining porous materials or those with special finishes, which are often supplied with a protective film.

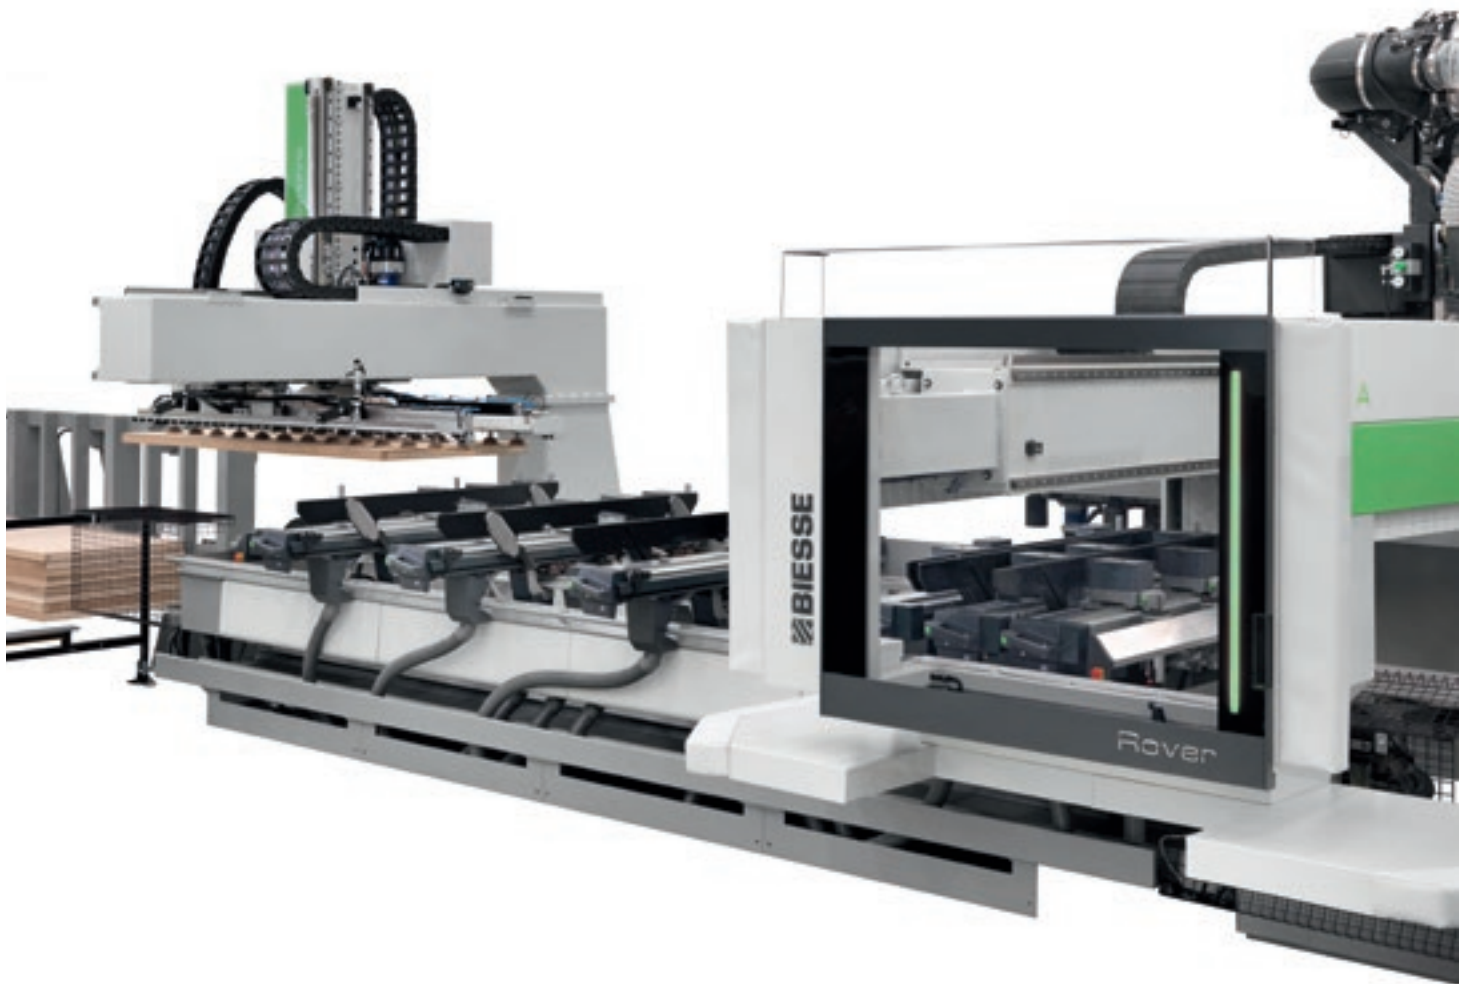

Synchro can also machine stacks of different-sized panels, thanks to stack reference device and the panel pre-alignment cycle, which is performed while the machine is running, while the Rover machining centre processes the previous panel.

Synchro can be positioned to the left or right of the machining centre.
Flow of materials that are consistent with the customer facility production cycle.

- ▶ Prevents damage caused by manual handling of materials.
- ▶ Extremely simple user interface, integrated into the machining centre programming functions.

HIGH-TECH BECOMES ACCESSIBLE AND INTUITIVE

BSOLID IS A 3D CAD CAM SOFTWARE PROGRAM THAT SUPPORTS THE PERFORMANCE OF ANY MACHINING OPERATION THANKS TO VERTICAL MODULES DESIGNED FOR SPECIFIC MANUFACTURING PROCESSES.

- Planning in just a few clicks, with endless possibilities.
- Simulating machining operations to visualise the piece ahead of manufacturing and have some guidance for the planning phase.
- Virtual prototyping of the piece to avoid collisions and ensure optimal machine equipment.





SIMPLIFYING EDGEBANDING PROGRAMMING

BEDGE IS A BSUITE PLUG-IN, SEAMLESSLY INTEGRATED FOR EDGE BANDING PLANNING. BY UTILISING BSUITE'S DESIGN AND SIMULATION CAPABILITIES, BEDGE MAKES EDGE BANDING EVEN THE MOST COMPLEX SHAPES, VERY SIMPLE.

- Automatic generation of the edg banding operation sequence.
- Easy to understand and operate.
- Simplified management of edg banding aggregates.



IDEAS TAKE FORM AND SHAPE

BCABINET IS THE BSUITE PLUGIN FOR FURNITURE DESIGN. IT ALLOWS USERS TO DEVELOP DESIGNS FOR A GIVEN SPACE, AND TO QUICKLY IDENTIFY THE INDIVIDUAL ELEMENTS THAT MAKE IT UP.

- With the new plugin, it is easy to draw both individual items of furniture and complete furnishings for a range of spaces.
- Offering optimal integration with bSuite, users can move from design to manufacturing in just a few clicks.
- Total control and maximum optimisation of the furniture design and creation process, to achieve the highest levels of efficiency.

BCABINET



SOPHIA

GREATER VALUE FROM MACHINES



SOPHIA is the IoT platform created by Biesse in collaboration with Accenture which enables its customers to access a wide range of services to streamline and rationalise their work management processes.

It allows alerts and indicators to be sent to the customer in real time, in relation to production, the machines used and the type of process carried out. These are detailed instructions for more efficient use of the machine.

□ **10% CUT IN COSTS**

□ **50% REDUCTION
IN MACHINE DOWNTIME**

□ **10% INCREASE
IN PRODUCTIVITY**

□ **80% REDUCTION IN PROBLEM
DIAGNOSTICS TIME**

**SOPHIA TAKES THE INTERACTION BETWEEN
CUSTOMER AND SERVICE TO A HIGHER LEVEL.**

iOT
SOPHIA

IoT - SOPHIA provides a comprehensive overview of the specific machine performance features, with remote diagnostics, machine stoppage analysis and fault prevention. The service includes a continuous connection with the control centre, the option of calling for assistance from within the customer app (such calls are managed as priorities), and an inspection visit for diagnostic and performance testing within the warranty period. Through SOPHIA, the customer receives priority technical assistance.

PARTS
SOPHIA

PARTS SOPHIA is the easy new, user-friendly and personalised tool for ordering Biesse spare parts. The portal offers customers, dealers and branches the chance to navigate within a personalised account, consult the constantly updated documentation of the machines purchased, and create a spare parts purchase basket indicating the real time availability in the warehouse and the relative price list. In addition, the progress of the order can be monitored at all times.


 **BIESSE**

in collaboration with  **accenture**

TECHNICAL SPECIFICATIONS


WORKING TABLE

		X1 milling	Y1 milling	X2 edgebanding	Y2 edgebanding	Z1 milling modules H74	Z2 milling modules H29
Rover A Edge 1632	mm	3228	1580	2300	1500	200	245
	inches	127,1	62,2	90,6	59,1	7,9	9,6
Rover A Edge 1643	mm	4320	1580	3300	1500	200	245
	inches	170,1	62,2	129,9	59,1	7,9	9,6
Rover A Edge 1659	mm	5920	1580	4900	1500	200	245
	inches	233,1	62,2	192,9	59,1	7,9	9,6

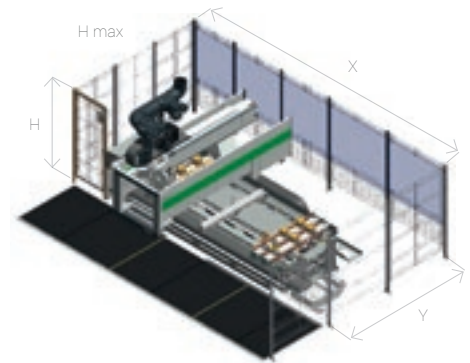

FOOT PRINT

CE	Loadable panel	X	X with outer edge magazine	Y	H	H max 4 axis	H max 5 axis
Rover A Edge 1632	belt operated 2100	7045	7884	5387	2000	2400	2700
	with bumper and photocells 2100	7045	7884	5437	2000	2400	2700
Rover A Edge 1643	belt operated 2100	8078	8917	5387	2000	2400	2700
	with bumper and photocells 2100	8078	8917	5437	2000	2400	2700
Rover A Edge 1659	belt operated 2100	9681	10520	5387	2000	2400	2700
	with bumper and photocells 2100	9681	10520	5437	2000	2400	2700

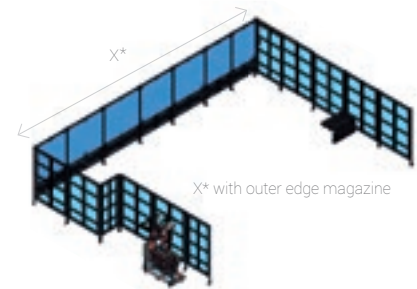

WORKING TABLE SYNCRO

Length	mm	500	2500
Width	mm	200	1350
Thickness	mm	16	60
Weight	Kg	-	100
Useful height of stack	mm	-	1000
Height of stack from ground (including 145 mm Europallet)	mm	-	1145

X / Y / Z axis speed	m/min	80 / 60 / 20
Vector speed	m/min	100

H mesh = 2000 mm H max = 2970 mm



The technical specifications and drawings are non-binding. Some photos may show machines equipped with optional features. Biesse Spa reserves the right to carry out modifications without prior notice.

A weighted sound pressure level (LpA) during machining for operator workstation on vane-pump machine Lpa=79dB(A) Lwa=96dB(A) A-weighted sound-pressure level (LpA) for operator workstation and sound power level (LwA) during machining on cam-pump machine Lwa=83dB(A) Lwa=100dB(A) K measurement uncertainty dB(A) 4.

The measurement was carried out in compliance with UNI EN 848-3:2007, UNI EN ISO 3746: 2009 (sound power) and UNI EN ISO 11202: 2009 (sound pressure levels at workstation) during panel machining. The noise levels shown are emission levels and do not necessarily correspond to safe operation levels. Despite the fact that there is a relationship between emission and exposure levels, this may not be used in a reliable manner to establish whether further measures need to be taken. The factors determining the exposure level for the workforce include length of exposure, work environment characteristics, other sources of dust and noise, etc. i.e. the number of other adjoining machines and processes. At any rate, the above information will enable the operator to better evaluate dangers and risks.

BIESSE CNC EDGBANDING RANGE

CNC - EDGEBANDING



ROVER A EDGE



ROVER B EDGE



ROVER C EDGE



ROVER EDGE LINE

MADE WITH BIESSE

THE BIESSE GROUP'S TECHNOLOGY SUPPORTS THE MANUFACTURING EFFICIENCY OF THE WORLD'S LARGEST FURNITURE MANUFACTURERS

"We were looking for a solution that would be so innovative that it would satisfy all our needs at the same time," states the manufacturing manager of one of the world's largest furniture manufacturers.

"Most of our production was already made using numerical control tools, but now everything that we produce is made with these technologies.

This is why it was necessary to increase our production capacity. Biesse offered a solution that we liked very much, a veritable range of processing centres and automatic magazines. Innovative, fascinating and decidedly powerful. With Biesse we defined a "turnkey" solution to be planned, built, tested, installed, inspected and commissioned within a precisely defined schedule".

Source: excerpt from an interview to the manufacturing manager of one of the world's largest furniture manufacturers.

BIESSE.COM

A photograph of a modern bedroom interior. The room features a bed with a patterned blanket, a desk with a chair, and a window with red curtains. The image is overlaid with a green gradient on the left side.

LIVE THE EXPERIENCE

BIESSEGROUP.COM



Interconnected technologies and advanced services that maximise efficiency and productivity, generating new skills to serve better our customer.

LIVE THE BIESSE GROUP EXPERIENCE AT OUR CAMPUSES ACROSS THE WORLD.



BIESSEGROUP

