



# BRANDT - Highflex 1660 vario

## Different configurations - constant quality

For all requirements the perfect configuration and therefore the best possible solution. The open space in the finishing area will be equipped with one out of four fix specified unit combinations.

One of the following described combinations must be mounted ex works.

Retrofitting is not possible!

The profile scraping unit, the multistage scraping unit, the tiltable grooving unit and a sanding unit are in different combinations available.




BRANDT Kantentechnik GmbH  
Weststraße 2  
32657 Lemgo  
info@brandt.de

[www.brandt.de](http://www.brandt.de)

## Configuration 1

- **2x # 5760 Scraping unit w. quick-change heads**
  - Sensing from top, bottom and laterally, for rounding off roughly trimmed PVC-edgings

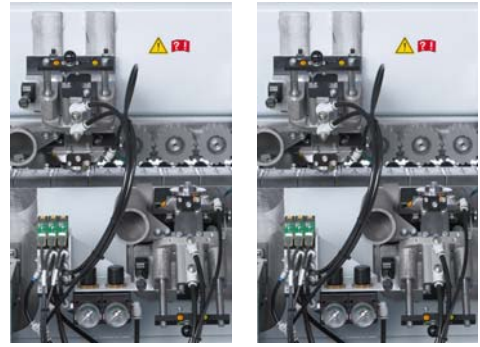

## Configuration 2

- **# 5744 Multistage scraping unit**
  - Automatic change over chamfer/radius.
  - Standard equipment with 2 profile scraping knives r1.2, r2, r3 mm and 15 degrees chamfer.



## Configuration 3

- **# 4587 Grooving unit tiltable**
  - for continuous grooving work of the workpiece from underneath or face side, synchronously, without sensing
  - Max. grooving depth is 12 mm
  - Max grooving cross section 80 mm
- **2x # 5760 Scraping unit w. quick-change heads**
  - Sensing from top, bottom and laterally, for rounding off roughly trimmed PVC-edgings



## Configuration 4

- **2x # 5760 Scraping unit w. quick-change heads**
  - Sensing from top, bottom and laterally, for rounding off roughly trimmed PVC-edgings
- **# 5060 Belt sanding unit**
  - for sanding of straight wood edges
  - Belt speed 12/24 m/s

