



Art. 2207
Universal chain mortiser - Mod. "OMM.250"



Art. 2208
Universal chain mortiser - Mod. "OM MINOR"



Technical data

"OMM 250"

Max. dept of the mortise useful	180 mm.	150	mm.
Max. mortising length	200		mm.
Transversal stroke useful	110 mm.	80	mm.
Two-direction rotation of the longitudinal carriage on the table	45°		
Vertical stroke of the table	950		mm.
Table two-directions rotation	45°		
Special motor	2,5		HP

Standard equipment:

Chain grinding attachment
 Service spanner


Technical data

"OM MINOR"

Max. mortising dept useful	180 mm.	160	mm.
Max. mortising length	180		mm.
Transversal stroke useful	80 mm.	80	mm.
Two-direction rotation of the longitudinal carriage on the table	45°		
Table two-directions rotation	45°		
Special motor in cast iron, externally ventilated, universal voltage, with terminal board	2 HP		2800 rpm
Cast iron frame, approximate weight	170		Kg.

Standard equipment:

Chain grinding attachment.
 Pump T.L.2 for chain lubrication.
 Service spanner.

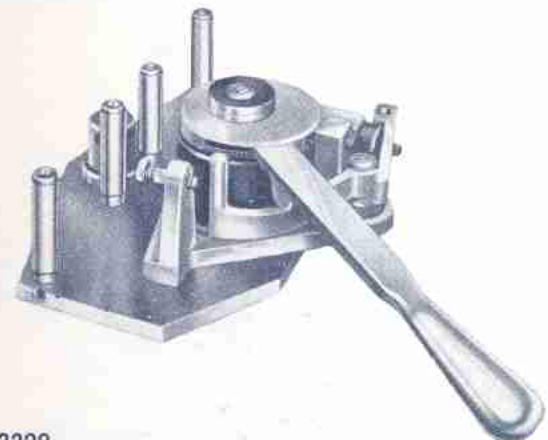

Art. 2209
Semiautomatic apparatus for shutter mortise (Can be applied on the all chain mortiser)