

# Opera 5

finishing centre



When competitiveness  
means cutting-edge  
technology and  
ultimate ease  
of use



Made **In** Biesse

## The market requires

a change in manufacturing processes that enables users to perform **complex processing operations** quantities, for small and medium-size production lots, achieving **best-in class performance** with a **modest investment**.

## Viet responds with

**technology solutions** that can be customised to depending on manufacturing requirements and deliver high quality finishes and productivity.

**Opera 5** is the new finishing centre designed to satisfy the needs of small and medium-sized enterprises that require versatility with a high technology content.

- ▶ **Simple, functional cutting-edge technology.**
- ▶ **Ultimate machine customisation.**
- ▶ **High tech solutions available for any processing operation requirement.**
- ▶ **Minimal footprint.**



High performance  
with a modest  
investment



Opera 5  
finishing centre





Opera 5


# Simple, functional cutting-edge technology



Max. standard work height  
200 mm  
(7.8 inches).

Standard fixed worktable  
900 mm  
(35.4 inches).

Opera 5 is equipped with a substantial, wear-resistant steel **worktable** which guarantees precision and sturdiness for any type of processing operation. The worktable is positioned at 900 mm from the ground, thus ensuring ease of panel loading and unloading. This solution makes it possible to incorporate Opera 5 into automatic production lines.

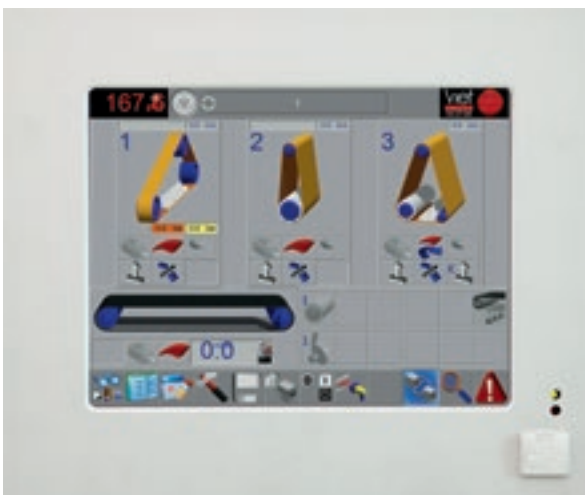

**Intuitive, text-free user interface: icons facilitate the operator's task.**

**IPC** is the range of **Control Systems** which are integrated into the machine using a Touch Screen monitor. This control system supports the management of all machine parameters, providing the operator with timely and intuitive information. The industrial PC processor provides control and feedback information to the machine in real time, making it extremely user-friendly.

The control system is an industrial PC with 8" or 15" touch-screen display. The interface is available in 18 different language versions. The software version can be configured for right and left-handed operation. There is also a tablet supported remote control.

# Ultimate machine customisation

A comprehensive range of units can be combined and duplicated within the 4 position head, delivering a quality finish for any type of panel which is vastly superior to the usual market standard.



Brite Roller.

Abrasive brush.

Structuring  
Brush.

Cleaning brush.



SpinBrush.



Win units.



HPG knife planner.



Superfinishing pad.



Pad.



Roller.



Compact cross unit.



Combined.



# High-tech solutions available for any processing operation requirement

## Solutions for calibration and bulk removal.

For calibration operations, the machine can be equipped with 190 or 240 mm stainless steel or 90 SH rubber roller fitted with 30 Hp motors.


The HPG knife unit is available for extreme removal operations. Together with other working units, it ensures maximum material removal and a perfectly flat surface.



The **Roller unit** is extremely precise and effective. Depending on the hardness of the rubber used and the roller's cross-section, the unit can be used to calibrate, sand or satin-finish.

Diameters::

- 190 mm
- 240 mm
- 300 mm.

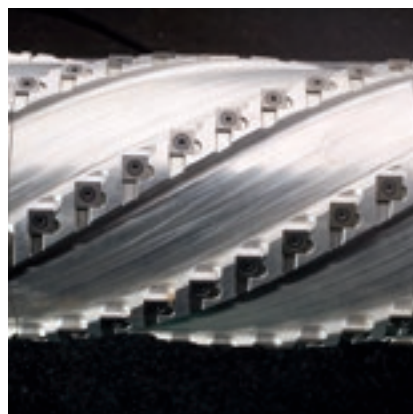

The **HPG unit** is recommended for the calibration of blockboard panels and supports the removal of several millimetres of material in a single run.



Solutions for high-quality finishes.



Opera 5, available with 2 to 4 working units and equipped with cross units, pad units, superfinishing pad units and/or sanding brushes in any positioning order, is configured as a genuine finishing centre.




The same machine can be configured to combine calibration units and soft rubber sanding rollers with a 300 mm cross-section and/or superfinishing pad units makes Opera 5 a multi-functional sanding centre that can respond to the most diverse processing needs.

# High-technology to enhance machine performance

**Viet 0 5 is built using the same technology of higher-range machines. Optimal quality, less waste and significant cost reduction.**

The **sectioned electronic pad** enables users to perform high-quality sanding operations which to the electro-pneumatic sectors that are only actioned on the panel's surface. The vast range of possible adjustments offers specific functionalities for different types of processing operations.



The **electronic pad equipped with HP (High Performance) technology** enhances processing results for both surface finish and flatness.

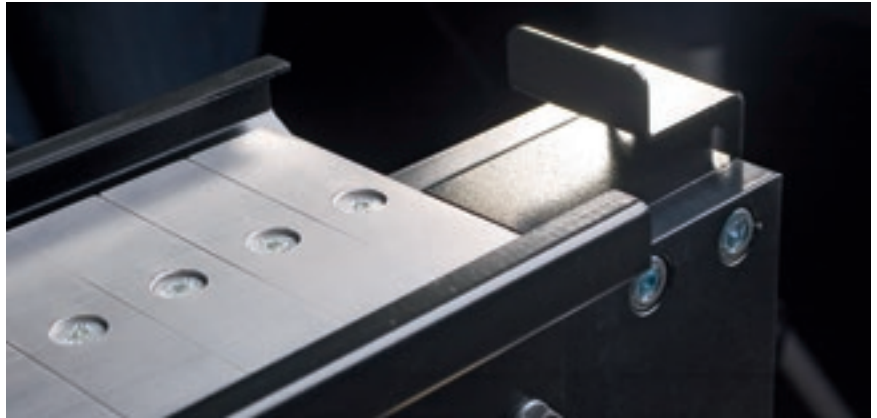

- ▶ +30% greater belt life expectancy.
- ▶ -30% lower electricity consumption.
- ▶ Higher finish grade.
- ▶ Even surface.
- ▶ -20% less dust.
- ▶ No excessive sanding.

## Save corner.


All electric pads, with IPC controls, are fitted with the exclusive, patented Save Corner Function. The system limits the sanding time on the corners of the panel, thus preserving the most delicate portions of the panel's surface.

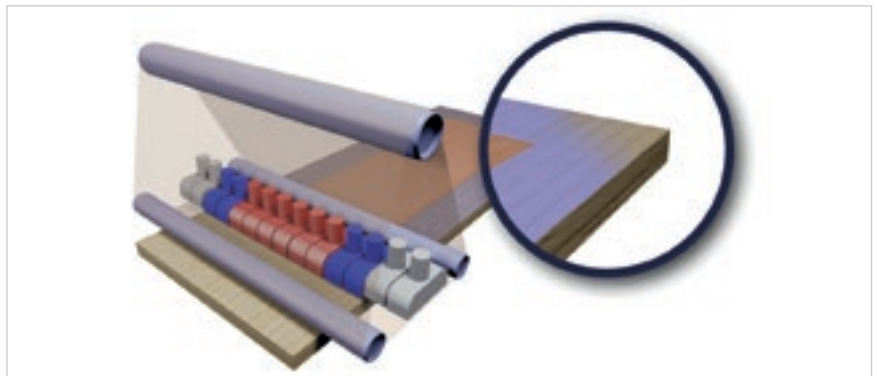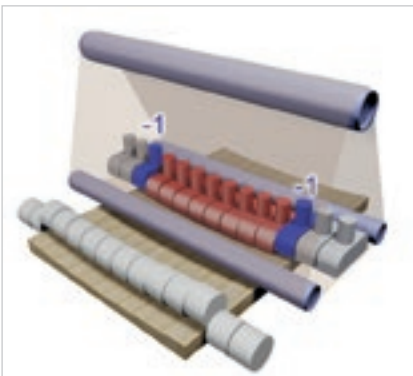



The **unit with vertical win brushes** is a vertical rotating-brush sanding system. The unit enables customers to sand - via a brushing action - the profiles and side surfaces, ensuring an even finish. Individual units, equipped

with large cross-section brushes (300 mm), can be adjusted independently as far as side position, angle (-10° +35°) and height.

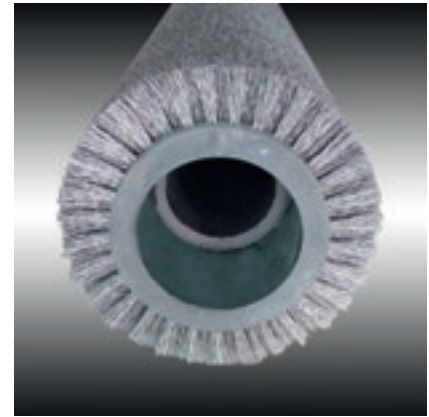

The **brushing unit brush** enables the customer to highlight the wood grain of processed panels.



The **Spinbrush unit** is the ideal solution for sanding components manufactured with types of woods with different grains: soft material is removed from the wood's grain in a uniform way, also thanks to the tool's oscillating motion, which ensures an extraordinarily even processing finish. The SpinBrush unit's

functions include corner-rounding of painted panels, which eliminates any issues linked to manual handling with the resulting uneven production and system slowdowns.



Sturdy and reliable, the **longitudinal brush** is equipped with a cross-sectional oscillation system to provide a uniform finish quality for the end piece, as well as with electronic interference adjustment managed from the control panel. Abrasive strips can be replaced quickly and without the need to remove the unit from the machine. 300 or 400 mm cross-section abrasive brush.



# Perfect surfaces


The High Performance technology of electronic PAD and rollers on Viet sanding machines, maintains the same sanding pressure, adapting to different surface thicknesses whilst applying a constant abrasive action to ensure optimum surface flatness.

## HIGH PERFORMANCE


The minimum pressure means 100% quality on sanded components. The perfect combination of a Biesse finish and Italian genius.



# Optimal panel cleaning with a great price/ performance ratio

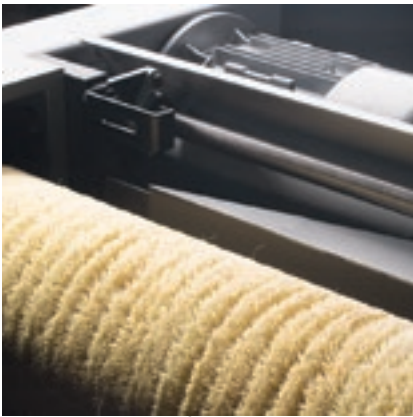

The **panel cleaning brush** can be fitted with bristles of different materials to respond to the most stringent cleaning requirements for processed panels.

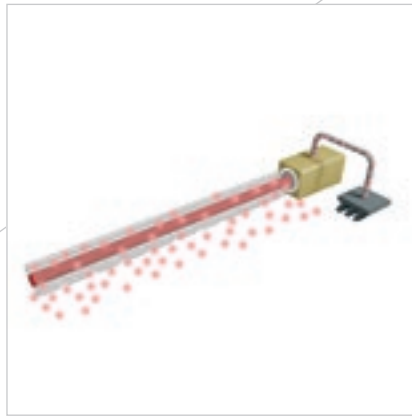

The **anti-static bar** eliminates electrostatic charges on painted panels.



The **rotating blower**, positioned downstream of the machine, enables the optimal cleaning of the panel's surface at the end of the sanding cycle.

The **linear blower** is used to finish cleaning the panel's edges. Ideally, it should be coupled with the rotating blower.



**ESS**  
VIET ENERGY SAVING SYSTEM


VIET - Energy Saving System.  
Viet, always focussed on energy conservation, provides the E.S.S. Energy Saving System within its product range i.e. a series of accessories aimed at reducing energy consumption.



# Technical specifications



20% smaller footprint. Motors and cooling fans housed within the machine.

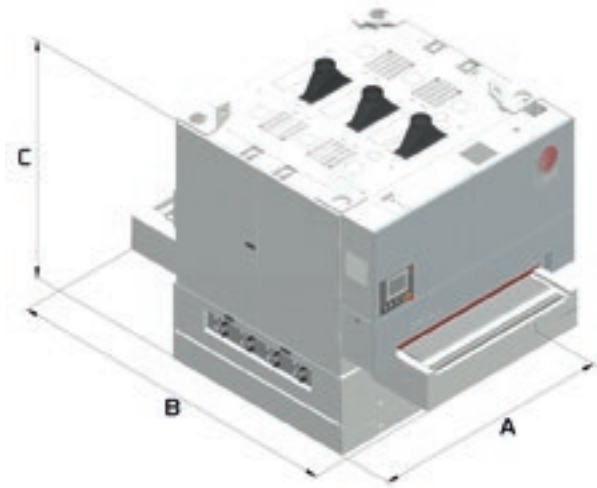

|                                    | OPERA 5-2             | OPERA 5-3             | OPERA 5-4             |
|------------------------------------|-----------------------|-----------------------|-----------------------|
|                                    | (mm / inch)           | (mm / inch)           | (mm / inch)           |
| A                                  | 2175/86               | 2175/86               | 2175/86               |
| B                                  | 2580/102              | 3057/121              | 3515/139              |
| C                                  | 2438-2635/96-104      | 2438-2635/96-104      | 2438-2635/96-104      |
| Working units length               | 1350/53.1             | 1350/53.1             | 1350/53.1             |
| Min-max processing thickness       | 3-200/0.12-7.9        | 3-200/0.12-7.9        | 3-200/0.12-7.9        |
| Size of longitudinal sanding belts | 1380x2620/54.3x 103.1 | 1380x2620/54.3x 103.1 | 1380x2620/54.3x 103.1 |
| Size of cross sanding belts        | 150x5520/5.9x 217.3   | 150x5520/5.9x 217.3   | 150x5520/5.9x 217.3   |
| Forward speed m/min                | 3 - 16                | 3 - 16                | 3 - 16                |
| Operating pressure bar             | 6                     | 6                     | 6                     |
| Mass Kg                            | 3950                  | 4700                  | 5450                  |
| Motor power up to Kw (HP)          | 22 (30)               | 22 (30)               | 22 (30)               |

The technical specifications and drawings are non-binding. Some photos may show machines equipped with optional features. Biesse Spa reserves the right to carry out modifications without prior notice.

Weighted sound pressure levels at the machine entry operator station: 75.0 dB(A) without load, 76.0 dB(A) with load. Weighted sound pressure levels at the machine exit operator station: 70.5 dB(A) without load, 71.0 dB(A) with load.

Viet Srl. designed the machine to reduce airborne noise emission at source to the lowest possible level, in accordance with the requirements of Community Directive 2006/42/EC, and commissioned a test to determine the sound pressure emission level at the operator station for the smoothing/sanding machine.

Standards: The measurement was carried out in compliance with UNI EN ISO 19085-8:2018, UNI EN ISO 11202:2010. The noise levels shown are emission levels and do not necessarily correspond to safe operation levels. Even though there is a relation between emission levels and exposure levels, this cannot be used reliably to establish whether further precautions are necessary. The factors determining the noise levels to which the operative personnel are exposed include the length of exposure, the characteristics of the work area, as well as other sources of dust and noise, etc. (i.e. the number of machines and processes concurrently operating in the vicinity). In any case, the information supplied will help the user of the machine to better assess the danger and risks involved.

# Service & Parts

Direct, seamless co-ordination of service requests between Service and Parts. Support for Key Customers by dedicated Biesse personnel, either in-house and/or at the customer's site.

## Biesse Service

- ▶ Machine and system installation and commissioning.
- ▶ Training centre dedicated to Biesse Field engineers, subsidiary and dealer personnel; client training directly at client's site.
- ▶ Overhaul, upgrade, repair and maintenance.
- ▶ Remote troubleshooting and diagnostics.
- ▶ Software upgrade.

500 / Biesse Field engineers in Italy and worldwide.

50 / Biesse engineers manning a Teleservice Centre.

550 / certified Dealer engineers.

120 / training courses in a variety of languages every year.


The Biesse Group promotes, nurtures and develops close and constructive relationships with customers in order to better understand their needs and improve its products and after-sales service through two dedicated areas: Biesse Service and Biesse Parts.


With its global network and highly specialised team, it offers technical service and machine/component spares anywhere in the world on-site and 24/7 on-line.




## Biesse Parts

- ▶ Original Biesse spares and spare kits customised for different machine models.
- ▶ Spare part identification support.
- ▶ Offices of DHL, UPS and GLS logistics partners located within the Biesse spare part warehouse, with multiple daily pick-ups.
- ▶ Order fulfilment time optimised thanks to a global distribution network with de-localised, automated warehouses.

92%  of downtime machine orders fulfilled within 24 hours.

96%  of orders delivered in full on time.

100  spare part staff in Italy and worldwide.

500  orders processed every day.



# Made **With** Biesse

**Craftsmanship and cutting-edge technology to make the sweet music of success.**

Over 80,000 instruments installed in over 80 countries for Allen Organ, the largest organ manufacturer in the world. Headquartered in Macungie, PA, in the USA, and founded by Jerome Markowitz in 1937, Allen Organ boasts 200 employees and manufacturing facilities with a surface of 225,000 m<sup>2</sup>. "Allen" states Dan Hummel, Manufacturing Director, "has a high degree of vertical integration, which requires the company to have the utmost quality control and the flexibility to make changes in relatively quick time scales, depending on customer needs. We have some very peculiar requirements as far as production and planning of creative solutions are concerned. Our customers demand both customised products

and classic organs that are standard stock items. However, even standard organs are often modified to respond to specific needs". Allen organs are built by combining veneered panels with solid wood. "Everybody works very closely with suppliers to guarantee the best quality solid woods and panels", adds Hummel. The raw material is processed using high-tech machinery during the various production phases, to get to the end product. During the last step, the processed wood is sanded using a Biesse finishing centre. The touch-screen operated sanding centre has a combined roller/roller and sectioned pad unit for the sanding of veneered panels and solid wood.

*Source: Custom Woodworking Business Jan. 2013 Woodworking Network/Vance Publications.*

*Allen Organ is the leader in the manufacturing of superior-quality digital organs and similar instruments. Quality, craftsmanship and cutting-edge technology.*



<http://www.allenorgan.com>



# Biesse Group

In

1 industrial group, 4 divisions  
and 12 production sites.

How

€ 14 million p/a in R&D  
and 200 patents registered.

Where

39 branches and 300  
agents/selected dealers.

With

Customers in 120 countries (manufacturers of furniture,  
design items and door/window frames, producers of ele-  
ments for the building, nautical and aerospace industries).

We

4,200 employees throughout the world.

**Biesse Group** is a multinational leader in the  
technology for processing wood, glass, stone,  
plastic and metal.

Founded in Pesaro in 1969, by Giancarlo Selci,  
the company has been listed on the STAR sector  
of Borsa Italiana since June 2001 and is currently  
a constituent of the FTSE IT Mid Cap index.

 **BIESSEGROUP**

 **BIESSE**

 **INTERMAC**

 **DIAMUT**

**MECHATRONICS**

