


# HOLYTEK Offer More Professional

## High Precision & Accuracy Machinery

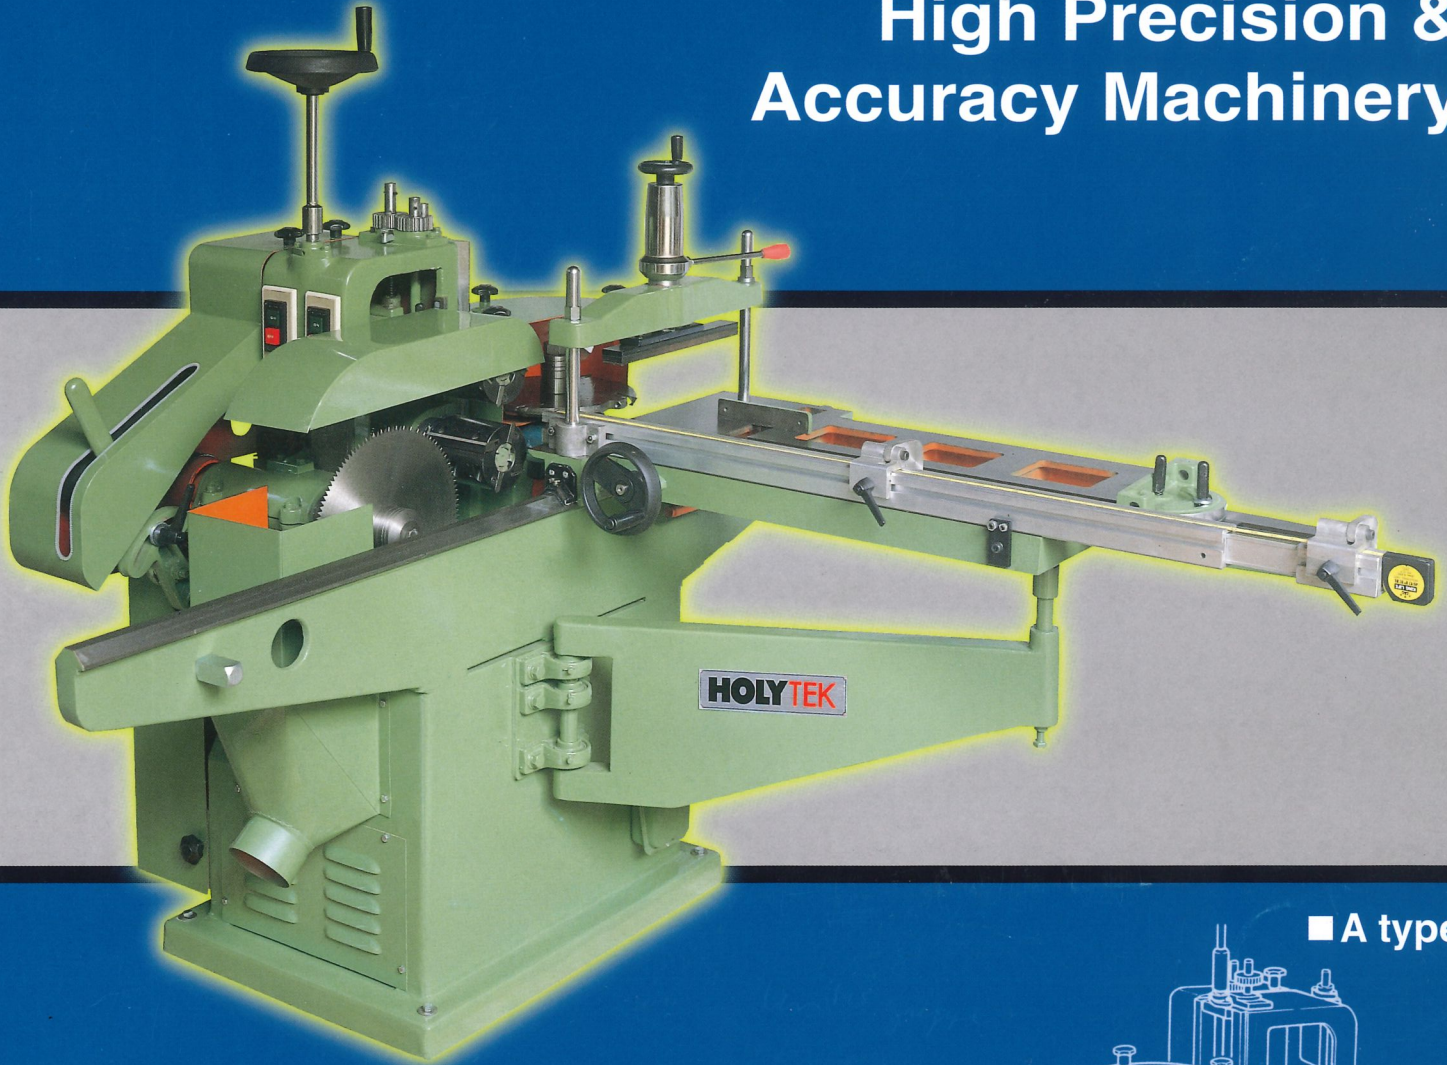


### SINGLE END TENONER


MODEL		ST-120A	ST-120B	ST-152A	ST-152B
Maximum tenon cut	Length	120mm	120mm	152mm	152mm
	Width	370mm	370mm	370mm	370mm
	Thickness	112mm	112mm	127mm	127mm
Max. tenoning cutterhead size		φ 105mm (dia.) 120mm (long)	φ 105mm (dia.) 120mm (long)	φ 110mm (dia.) 152mm (long)	φ 110mm (dia.) 152mm (long)
Max. shaping cutter size		φ 10"	φ 6 <sup>3</sup> / <sub>8</sub> "	φ 10"	φ 6 <sup>3</sup> / <sub>8</sub> "
Max. sawblade diameter		φ 12"	φ 12"	φ 12"	φ 12"
Spindle Diameter	Tenon spindle	φ 1"	φ 1"	φ 1 <sup>1</sup> / <sub>4</sub> "	φ 1 <sup>1</sup> / <sub>4</sub> "
	Cope spindle	φ 1"	φ 30mm	φ 1"	φ 30mm
	Saw blade	φ 1"	φ 1"	φ 1 <sup>1</sup> / <sub>4</sub> "	φ 1 <sup>1</sup> / <sub>2</sub> "
Cope spindle speed		3600RPM	6000RPM	3600RPM	6000RPM
Motor Horsepower	Saw & tenon head	3HP	3HP	5HP	5HP
	Cope head	2HP	5HP	3HP	5HP
Sliding table area		1280x450mm	1280x450mm	1280x450mm	1280x450mm
N.W. / G.W.		500kgs / 620kgs	550kgs / 670kgs	530kgs / 650kgs	600kgs / 720kgs
Packing dimensions (LxWxH)		1730x900x1300mm	1730x900x1300mm	1730x900x1300mm	1730x900x1300mm

■ All specifications and design characteristics shown in this catalogue are subject to change without notice.

■ A type

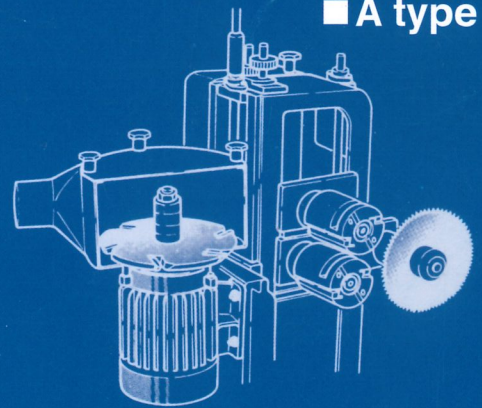




■ B type

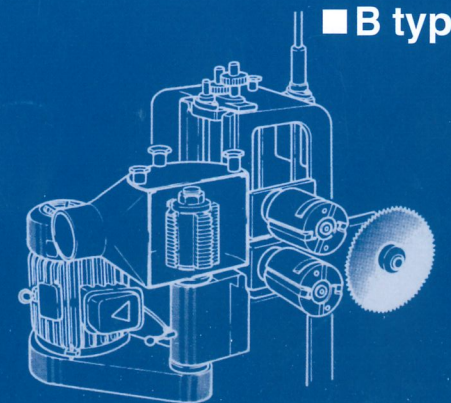

# T HE TERRITORY OF HIGH QUALITY

Now, you can choose from a complete range of and dowel manufacturing equipment, including: Rod Milling; Rod Sanding; Dower Milling; Dowel Cutting....

All of these choices come to from **HOLYTEK**-the pionner in rod and dowel production.

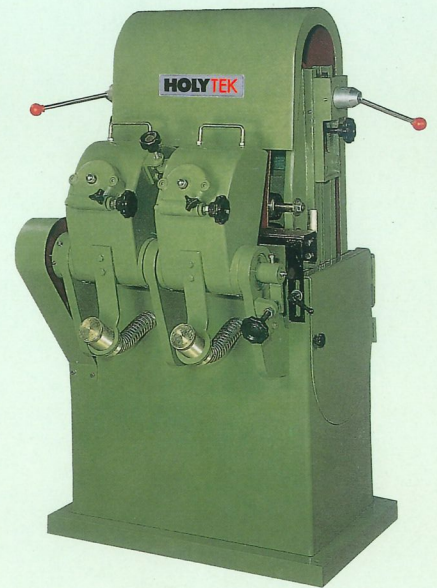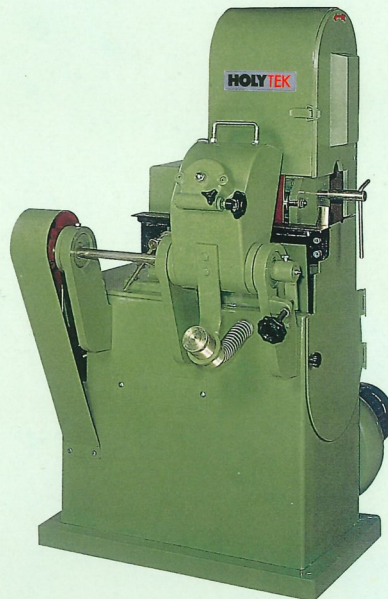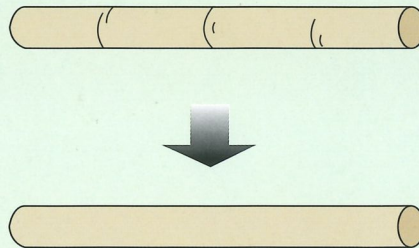


## FS-60 AUTO. ROUND ROD MILLING MACHINE

MODEL	FS-60
Working diameters (mm)	10-60
Minimum working length (mm)	300
Cutter motor (HP)	5
Feed motor (HP)	2
Cutter head speed (RPM)	3000
Feed speeds (m/min)	6,9,13,16
Machine dimensions (cm)	92x76x100
Net weight (kg)	300


## FS-80B2 AUTO. ROUND ROD SANDER (DOUBLE BELT)



MODEL	FS-80B2
Working diameters (mm)	5-80
Sanding belt size (mm)	125x1860
Feed speed (m/min)	1-20
Sanding belt motor (HP)	5
Dust extraction motor (HP)	1/2
Sanding belt speed (m/min)	1080
Machine dimensions (mm)	105x85x130
Net weight (kg)	420

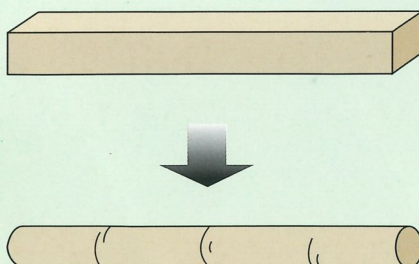

## FS-80B AUTO. ROUND ROD SANDER (SINGLE BELT)

MODEL	FS-80B
Working diameters (mm)	5-80
Sanding belt size (mm)	125x1860
Feed speed (m/min)	1-20
Sanding belt motor (HP)	3
Dust extraction motor (HP)	1/2
Sanding belt speed (m/min)	900
Machine dimensions (mm)	75x100x135
Net weight (kg)	250

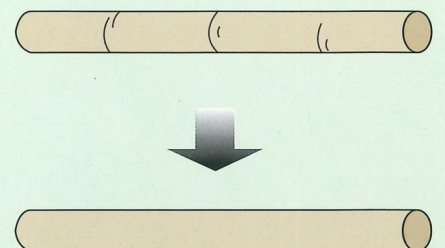

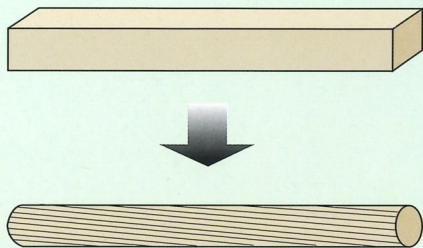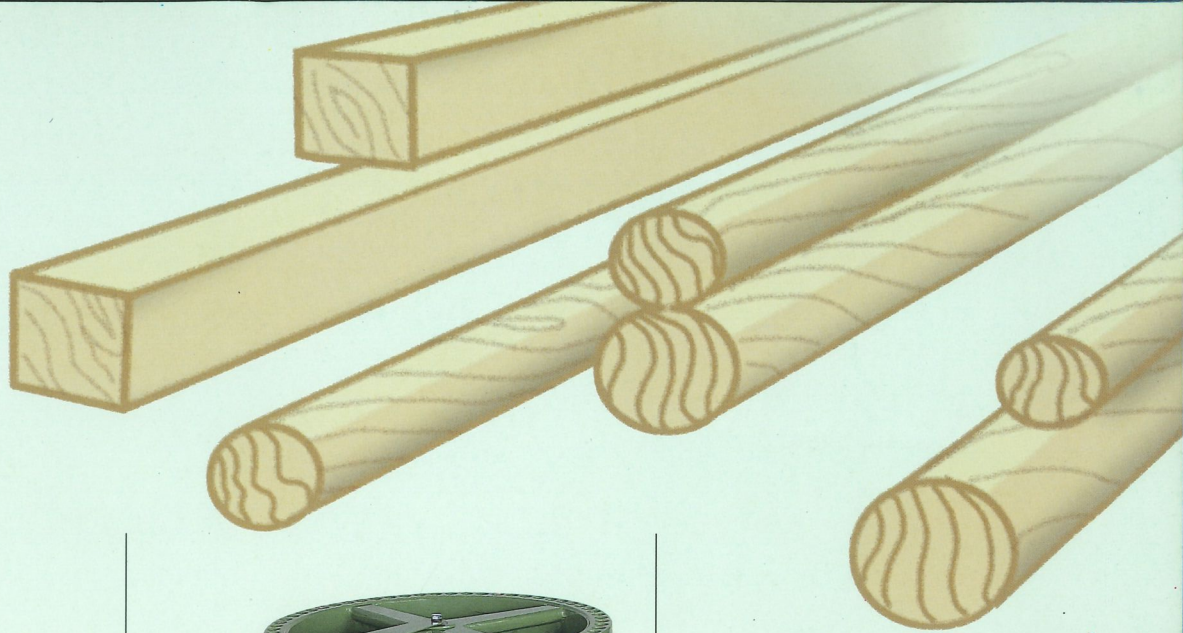


### FS-18 DOWEL MILLING MACHINE

MODEL	FS-18
Working diameters (mm)	6-18
Minimum working length (mm)	220
Cutter head motor (HP)	1
Feed speed (m/min)	8
Machine dimensions (cm)	60x44x26
Net weight (kg)	60



### FS-36 DOWEL CROSS-CUT AND CHAMFERING MACHINE

MODEL	FS-36
Working diameters (mm)	6-18
Minimum working length (mm)	20
Maximum working length (mm)	150
Motor power (HP)	1/2
Cutting speed (pieces/min)	36
Machine dimensions (cm)	56x50x58
Net weight (kg)	80

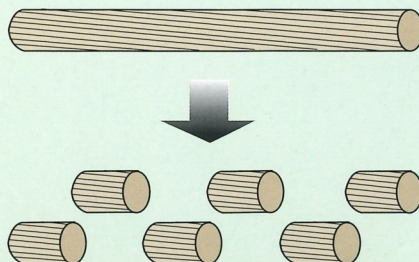

### FS-208.108 JIG SAW

MODEL	FS-208	FS-108
Motor (HP)	3/4(w/brake)	1/2
Thickness of cut (mm)	100	100
Blade length (mm)	310	310
Speed (RPM)	1500	1500
Table tilts	35°	35°
Table size (mm)	485x500	376x485
Overall dimension (HxLxW)	1220x1050x650	1116x1030x525
Net weight (kg)	280	180

# Top In Quality-HOLYTEK

Top In Performance




## HP-820.824 AUTO. PLANER

MODEL	HP-820	HP-824
Table size (mm)	711x552	787x654
Cutter head dia. (mm)	80	80
Cutter motor (HP)	5	7.5
Cutter speed (R.P.M.)	5400	5400
Feed motor (optional)	2 HP(two speed)	2 HP(two speed)
Table raising (optional)	1/2 HP	1/2 HP
No. of knives	3	3
Feed speed (m/min)	One speed:7	two speed:7-14
Max. working width (mm)	20" (508)	24" (609)
Max. cutting depth (mm)	9	9
Planing thickness range (mm)	3.2-184	3.2-184
Optional thickness range (mm)	3.2-230	3.2-230
N./ G. weighth (kgs)	560/660	660/760
Packing size (mm)	1016x864x1270	1118x965x1320

## HJ-512.514.516 HAND JOINTER

MODEL	HJ-512	HJ-514	HJ-516
Table size (mm)	12"x72" (305x1829)	14"x80" (356x2032)	16"x84" (406x2134)
Cutter head dia. (mm)	100	100	100
Motor (HP)	3	3	5
Cutter speed (R.P.M.)	5200	5200	5200
No. of knives	3	3	3
Max. working width (mm)	12" (305)	14" (356)	16" (406)
Max. cutting depth (mm)	19	19	19
N./ G. weighth (kgs)	410/480	480/550	530/630
Packing size (mm)	1930x686x1016	2170x710x1020	2235x762x1066
Fence size (mm)	1055x115	1055x115	1055x115

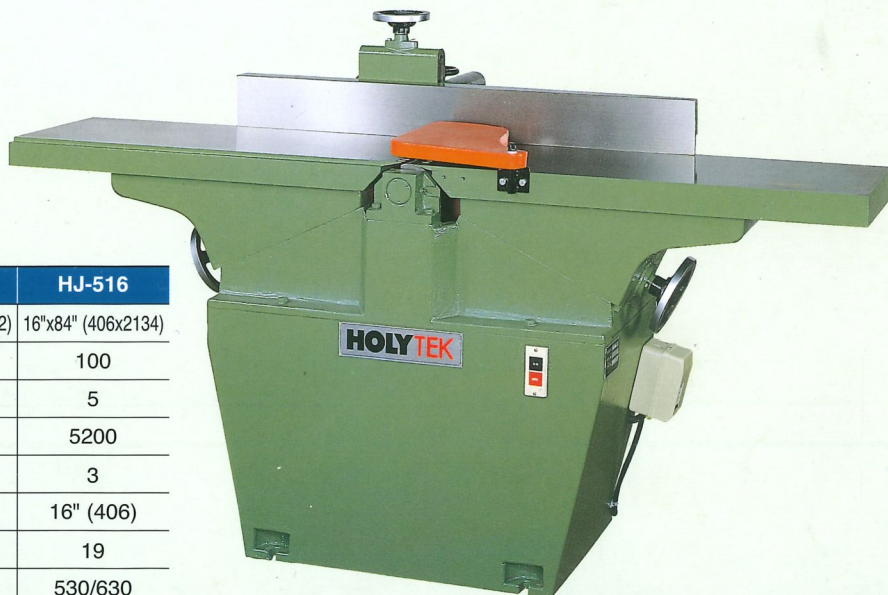

# HOLYTEK

**HOLYTEK INDUSTRIAL CORP.**

9F-1, NO. 400, SEC. 1, CHANG PING RD., TAICHUNG, TAIWAN, R.O.C.  
TEL: 886-4-2452818 (REP.) FAX: 886-4-2436928

© HT-97009