




**CALIBRATING
CONTACT WIDE BELT SANDER WITH
CALIBRATING ROLLER AND FINISHING PAD**

rte. 1000



SAC

rte. 1000

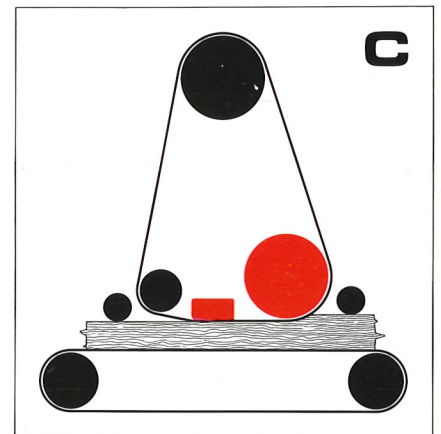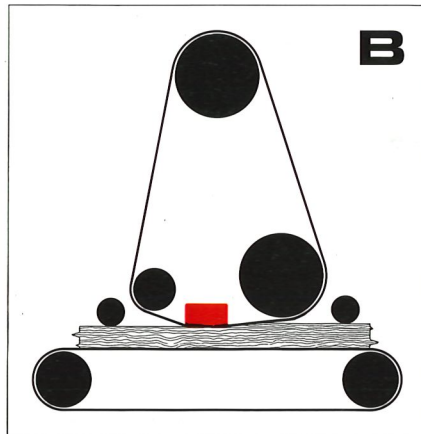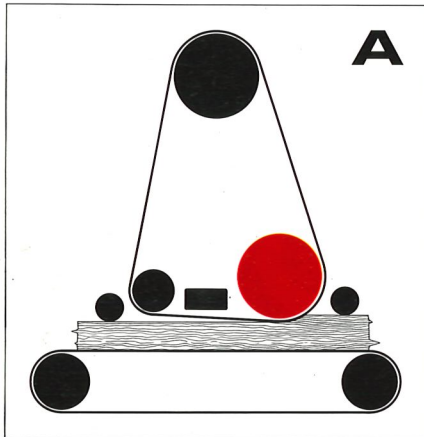

Working capacity	40"
Max. working piece thickness	6 3/4"
Min. working piece thickness	1/8"
Abrasive belt speed	73 ft/sec.
Abrasive belt width	40 1/2"
Abrasive belt length	75"
Calibrating roller - rubber hardness	90° shore
Main motor	10 HP
Feeding motor	1,1/1,5 HP
Table adjustment motor	0,5 HP
Feeding speed	18/36 ft/sec.
Required pressure	6 atu
Air consume	100 nl/1'
Shaving hood diameter	7 3/4"
Suction system capacity	1500 c.mt/h
Net weight	38 cwt

EXECUTION FOR MASSIVE WOOD/VENEERED PANELS

Abrasive belt speed	73/36 ft/sec.
Main motor	10/12 HP
Flexible bar for pad	
Electronic equipment for automatic pad adjustment	

EXTRA EXECUTION

Main motor	15 HP
Main motor	20 HP
Main motor	12/15 HP
Rear polishing roller	
Satinizing roller (type Scotch Brite)	
Air suction table	
Abrasive belt cleaner	
Automatic carpet centering	
Electronic device for position control of table	
Motor converter for infinitely variable feeding speed	
Motor converter for infinitely variable speed for abrasive belt	
Sectioned pad with membranes	
Electronic control for membranes sectioned pad	
Back table extension	
Dust exhaust plant	
Rubber of calibrating roller- different from 90° shore	

Technical data are not binding and may be altered during construction for improvements.