
Perfect Sanding

UniSander

 $2.3.0.0 - 5^{\circ}$



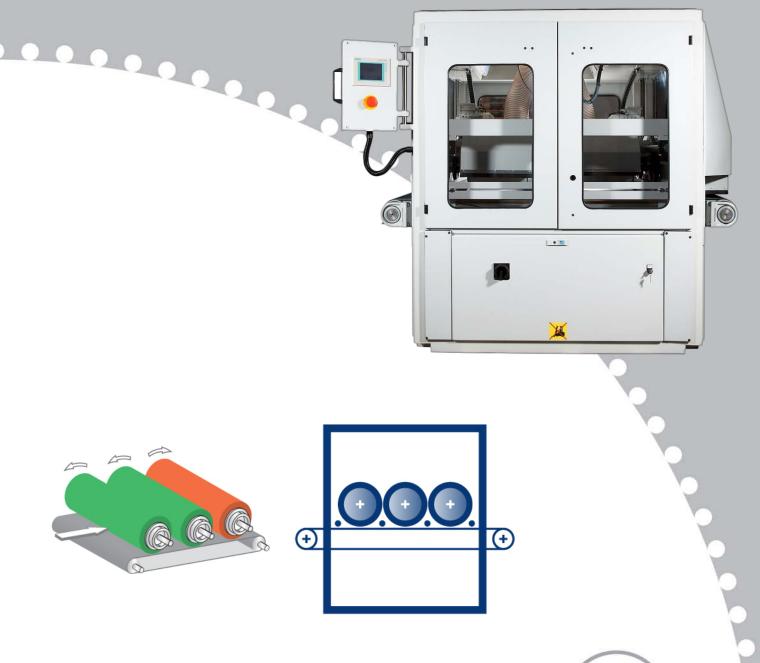

UniSander

2.3.0.

3 Sanding heads: 2 running with /

1 running against

Feed speed: 3-12 meter / min. Speed sanding heads: 50 - 450 Rpm

Operation side: Right / Left Voltage: 3 * 400 V, 50 Hz +N+PE

Safety: 32 A

Sucking out: 3000 m³/hour - 25 m/sec

Prepared for line installation.

Item size:

Length: min 100 mm

Height: min 5 mm - max 150 mm
Width: 1300 mm up to 2100 mm
The vacuum table can fix 100 x 100 mm

Dimension of the machine:

Length: 2185 mm Height: 2000 mm Width: 2000 mm

Turbo Blower + Cleaning brushes

Roller table with pressure rollers Vacuum table with pressure rollers Vacuum table without pressure rollers Super grip belt with pressure rollers

Color RAL 7035

Perfect Sanding

Production/analysis Product/analysis Partners & Customers Experience/test Cross Line Coorperations Flexible solutions Sale Service **Training** Support

UniSanding Always the best solutions

Use:

- Surface sanding
- More aggressive sanding.
- High line speed.

Finish wood sanding – All types of materials.

Lacquer sanding – All types of lacquer / primer



UniSanding A/S • Gemsevej 11 • DK-7800 Skive www.unisanding.com • info@unisanding.com T: +45 96 14 28 00