


Tilting Arbor Saw



HEAVY CUTTING, RIPPING for SOLID WOOD, SMOOTHLY SLIDING SAWING for PANEL
We handles the big jobs fast, easily and accurately at economical prices. Heavy duty construction w/large cast iron table, overload protection and emergency stop switch, precision aluminium alloy fence guides are standard, industrial safety protection with riving knife and suva guard are optional.

HOLYTEK

HOLYTEK

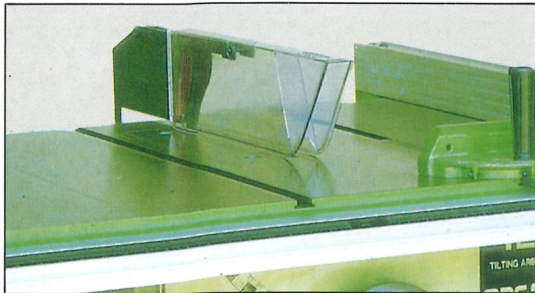


STANDARD ANTI-KICKBACK SAFETY GUARD

DESIGN FEATURES

- * Saw guard is made of plastic and with splitter and antikickback paws are standard.
- * European style riving knife w/safety guard also on request. Special suva guard for big panel sawing are optional.
- * T-slot miter gauge for miter cutting from 30°-90°.
- * New accurate aluminum rip fence smoothly moving by plastic roller. Single clamp handle locks fences aligns itself parallel to the saw blade.

OPTIONAL EQUIPMENT

- * New sliding table attachment
- * Arbor extension for dato & dato insert
- * Riving knife and safety suva guard
- * Electric brake, star delta switch
- * Clamping system for sliding table

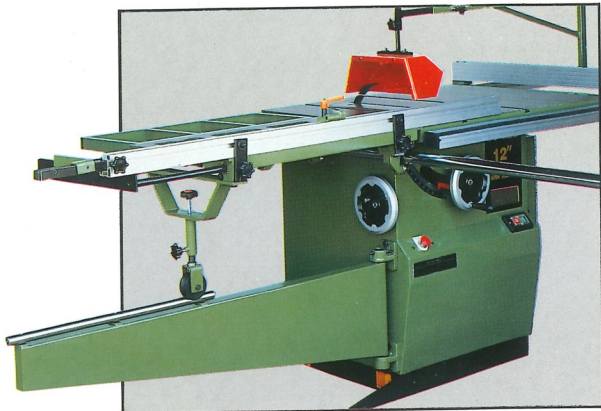

SPECIALLY DESIGNED SLIDING TABLE ATTACHMENT

- Sliding table carriage travels on V mounted ball bearings mounted on precision ground steel bar for a smooth operation.
- Cross cut fence has a built-in scale to use in conjunction with the stops provided for panel sizing also included a hand down clamp and short length stop.
- 4 feet × 8 feet or 3 feet × 6 feet capacity upon request.

SPECIFICATION

MODEL	BS-400	BS-350	BS-300	BS-250
Diameter saw blade	16" (405mm)	14" (350mm)	12" (305mm)	10" (250mm)
Max. depth of cut at 90°	6" (152mm)	5" (125mm)	4" (101.6mm)	3" (76mm)
Max. depth of cut at 45°	4 1/4" (108mm)	3 1/2" (88mm)	2 3/4" (70mm)	2" (54mm)
Arbor diameter	1" (* 30m/m)	1" or 30mm	1" or 30mm	1" or 30mm
Arbor speed	3750 rpm	3750 rpm	3850 rpm	4200 rpm
Main table size	48" × 38" (1220 × 965mm)	48" × 38" (1220 × 965mm)	48" × 30" (1220 × 762mm)	36" × 27" (915 × 685mm)
Table height	34 1/4" (857mm)	34 1/4" (857mm)	34 1/4" (857mm)	34 1/4" (857mm)
Sliding table size	30" × 26" (760 × 660mm)	30" × 26" (760 × 660mm)	30" × 26" (760 × 660mm)	30" × 18" (760 × 460mm)
Sliding table stroke	60" (1525mm)	60" (1525mm)	60" (1525mm)	44" (1118mm)
Sliding table capacity	4' × 8' (1220 × 2440mm)	4' × 8' (1220 × 2440mm)	4' × 8' (1220 × 2440mm)	3' × 6' (914 × 1828mm)
Max. rip to right of blade	49" (1245mm)	49" (1245mm)	38" (965mm)	25" (635mm)
Motor	7.5HP standard 10HP optional	5HP standard 7 1/2 HP optional	3HP standard 5HP optional	2HP standard 3HP, 5HP optional
Net weight	869 lb (395 kgs)	847 lb (385 kg)	572 lb (260 kg)	364 lb (165 kg)
Gross weight	1034 lb (470 kgs)	1012 lb (460 kg)	704 lb (320 kg)	495 lb (225 kg)
Packing size	37" × 44" × 42" h	37" × 44" × 42" h	32" × 36" × 42" h	29" × 36" × 42" h

* All specifications dimensions and design characteristics in this catalogue are subject to change without notice.