



RIEPE GmbH & Co. KG  
Theodor-Rosenbaum-Str. 30  
32257 Bünde

Tel. +49 (0)5223 60990  
Fax +49 (0)5223 63959  
www.riepe.eu  
info@riepe.eu



**100% RIEPE Products**  
**100% Quality Control**  
**Unlimited guarantee on Riepe spraying systems**  
*when used only with Riepe products.*

# Original RIEPE® release and cleaning agents for spraying units

## Special buffing wheels for your edge processing


- Fabric-Sisal-Lamellar wheels 3:1 ratio
- Fabric buffing wheels



### Available sizes (in mm):

Outer diameter:	120	140	160	160	190
Width:	11/20	25	25	25	20
Boreholes:	19	11	40	40/50/55	40/50
	(hexagonal)		special sizes on request		

Polishing wheels

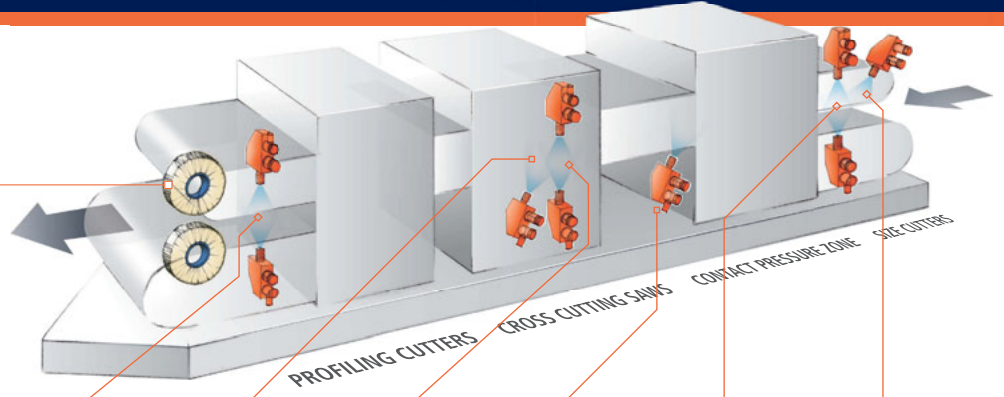

#### Cleaning agent

**LP163/93®**  
Electronically controlled cleaning agent spraying unit

#### Release agent

**NFLY®**  
Electronically controlled spraying unit for edging material and protective film

#### Antistatic-Coolant

**LP289/99®**  
Electronically controlled antistatic-coolant-spraying unit

#### Release agent

**NFLY®**  
Electronically controlled spraying unit for contact pressure roller and sliding shoes

#### Release agent

**LPZ/II® or TH97®**  
*(highly heat resistant)*  
Electronically controlled release agent spraying unit

#### Release agent

**LP113/03®**  
Electronically controlled spraying unit for edging material for corner joints

## RELEASE AGENT LPZ/II®



**Range of application: machine infeed**  
**Container: 30 litres / 200 litres**

Application of the special agent to the upper and lower surface prevents emerging glue residue from adhering to the work piece.

## CLEANING AGENT LP163/93®



**Range of application: in front of buffing wheels**  
**Container: 30 litres / 200 litres**

By the application of the cleaning agent in front of the buffing wheels, the previously applied release agent will be removed, together with any excess glue residue. The edge and the glue joint are also cooled. The edging material radius is polished to regain its sheen and match the colour of the surface. Result: An absolutely clean edge.

## RELEASE AGENT NFLY®



**Range of application: pressure roller, sliding shoes, tools, edging, protective film**

**Container: 30 litres / 200 litres / 500 ml Spray**

Application of this release agent onto the pressure roller prevents glue from adhering to it. The release agent is then transferred to the edging and carried to the sliding shoes. It can also be applied to other tooling to prevent glue residue adhering. The NFLY release agent can be sprayed directly onto the edging material to avoid damage to the material surface (Acrylic/Aluminium). In addition, it will also prevent any damage to the protective film on the edging material.

## ANTISTATIC-COOLANT LP289/99®



**Range of application: following the edge, band application**  
**Container: 30 litres / 200 litres**

The edge banding material is statically discharged by the application of the antistatic-coolant, and the glue joint cooled at the same time. Tracer rollers and work pieces remain free from milling ships. The glue cures more quickly. Glue build-up on the tools is considerably reduced.

## More RIEPE® quality-products on request

The spraying units will only operate maintenance free and ensure the success of your production if these original fluids are used. This is underlined by our experience. Consumption per fine nozzle: less than 1 litre for 5,000 running meters. Lacquers can be used without problem on surfaces treated with our products (water based paints on enquiry).

The leading machine manufacturers recommend and use **original Riepe products!**

