

**SIERRA CIRCULAR MULTIPLE
AUTOMATICA PARA TABLEROS.**

**SCIE CIRCULAIRE MULTIPLE
AUTOMATIQUE POUR PANNEAUX.**

**PARALLEL AUTOMATIC MULTIPLE
CIRCULAR SAW FOR BOARDS.**

**AUTOMATISCHE MEHRZWECK-
KREISSÄGEMASCHINE FÜR TAFELN.**




**Mod. SCMA-1250
Mod. SCMA-2050
Mod. SCMA-2500**




FERMIN ELOLA, S.L.




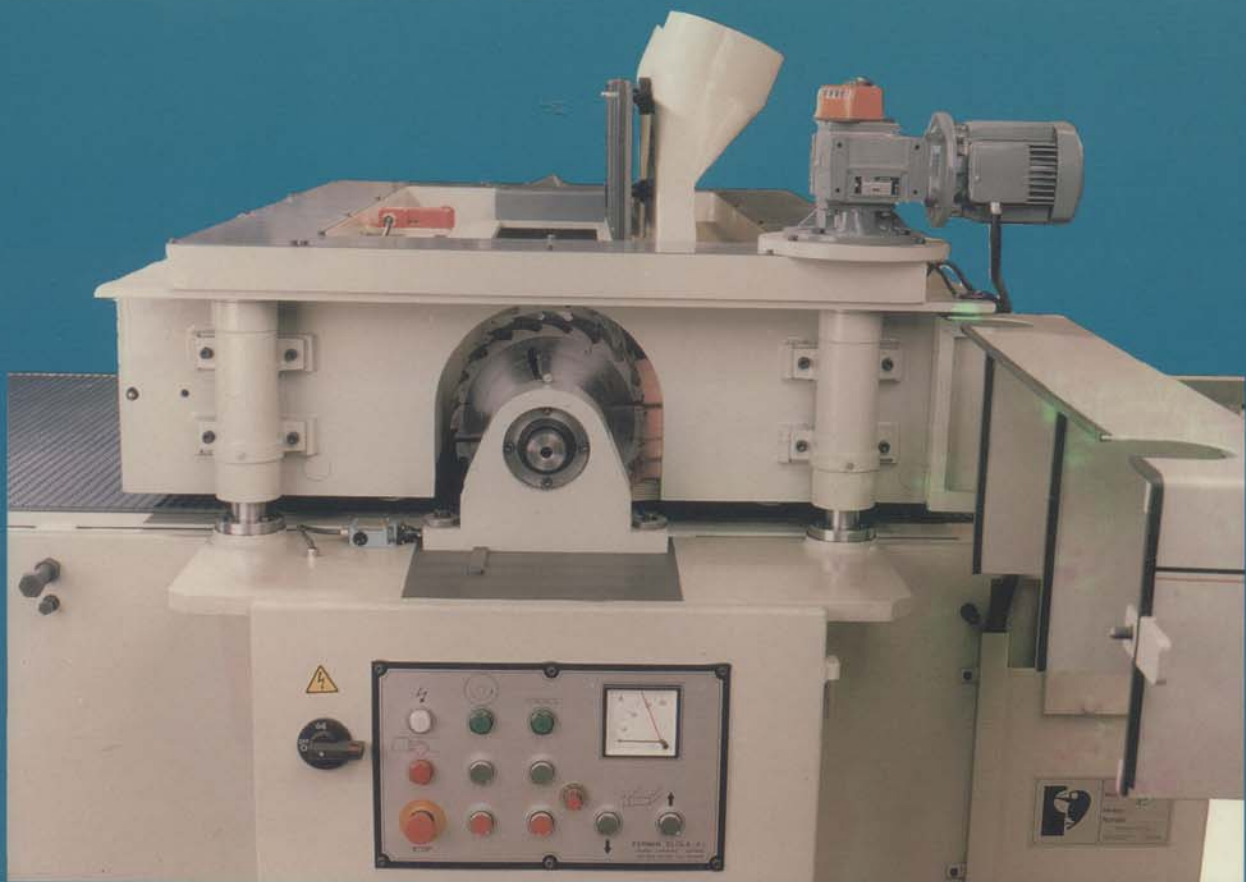


**PUERTA DE ACCESO A SIERRAS
PORTE D'ACCÈS AUX SCIES
ACCES DOOR TO SAWS
ZUGANGSTÜR ZU SÄGEN**

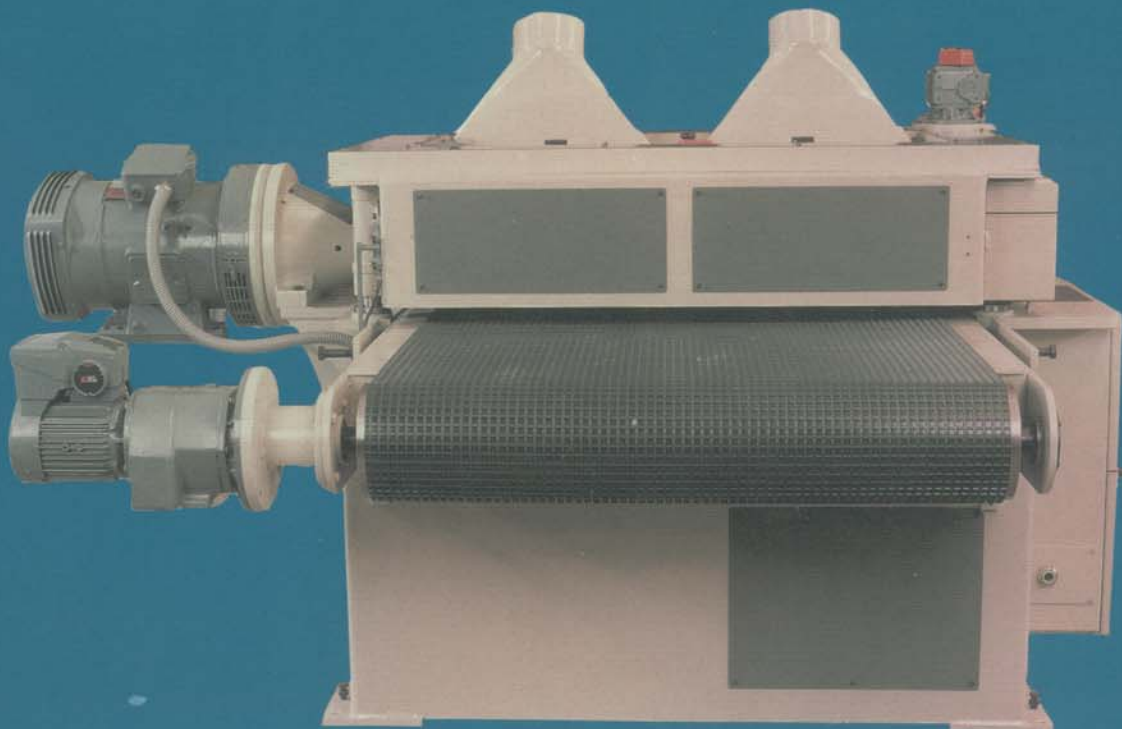

**VISTA SALIDA DE MAQUINA
VUE DE LA SORTIE DE LA MACHINE
VIEW OF MACHINE EXIT
ANSICHT MASCHINENAUSGANG**

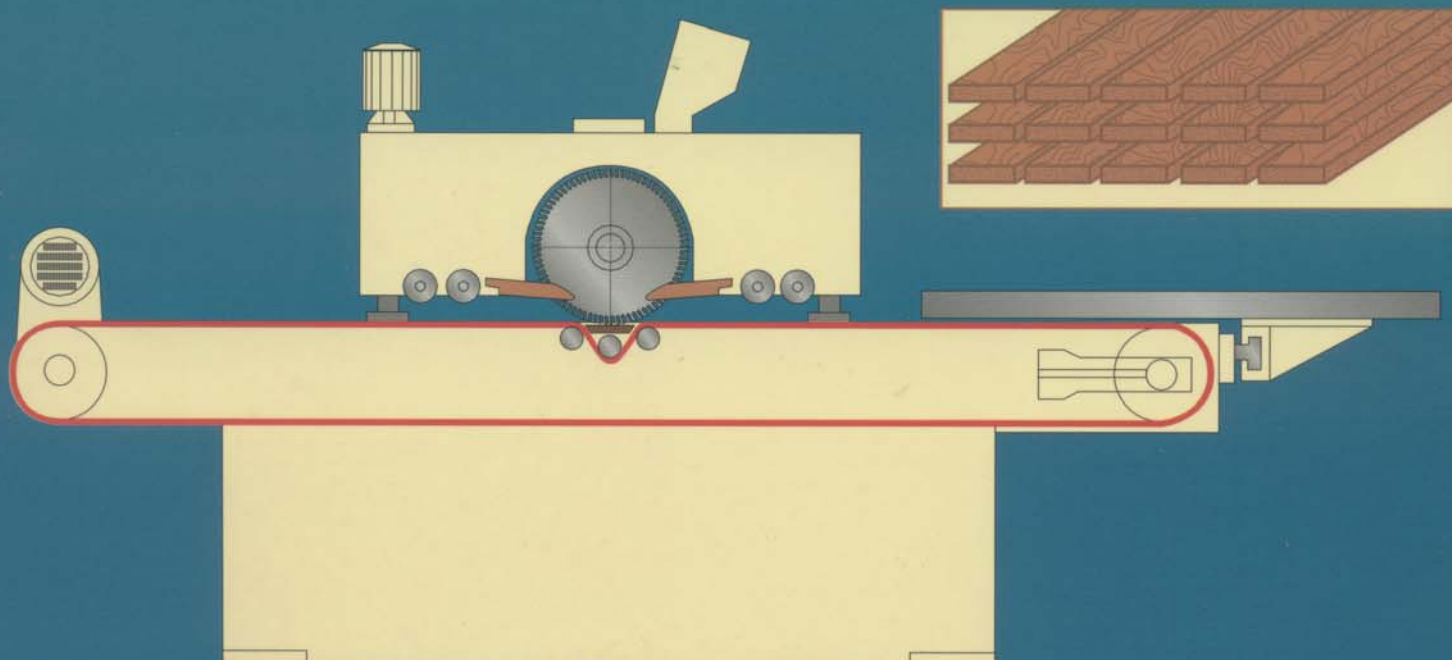

MESA DE ALTURA FIJA PARA CORTE DE TABLEROS
TABLE D'HAUTEUR FIXE POUR COUPER DES PANNEAUX
TABLE OF FIXED HEIGHT FOR BOARD CUTTING
TISCH MIT FESTER HÖHE ZUM SCHNEIDEN VON PLATTEN

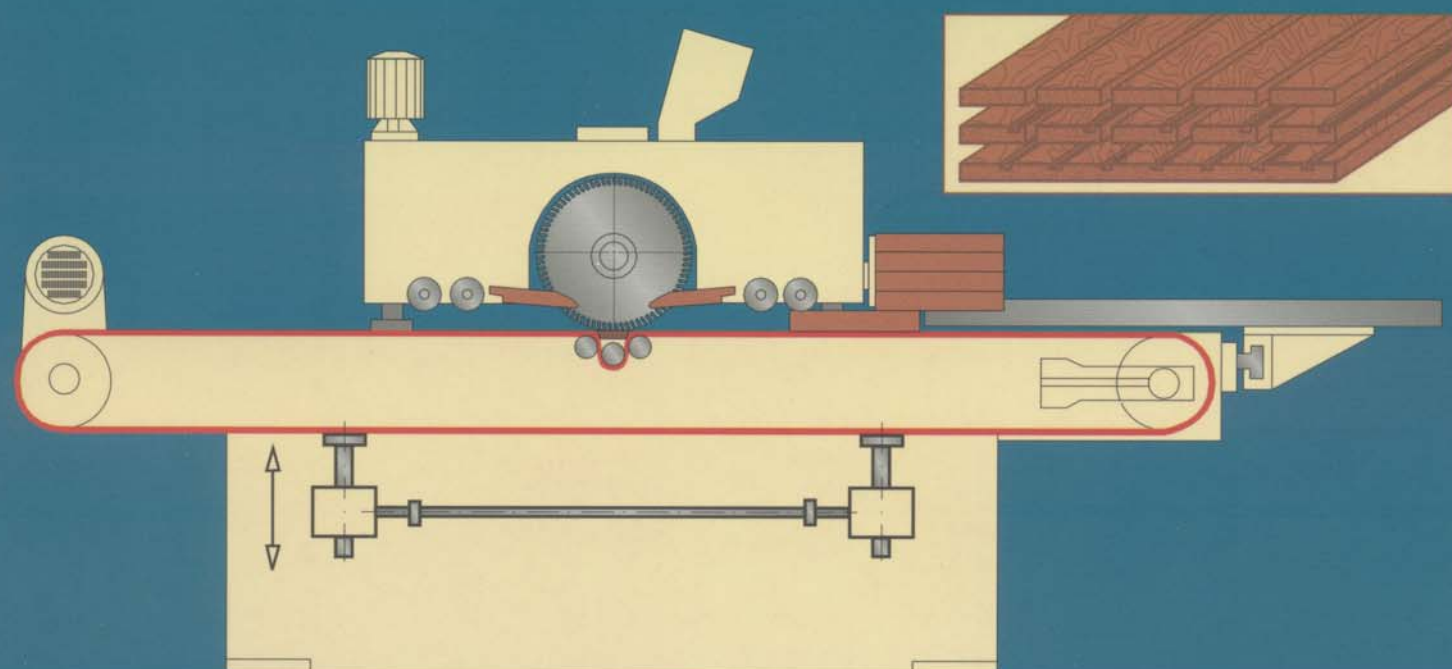

MESA DE ALTURA REGULABLE PARA RANURADO Y CORTE DE TABLEROS
TABLE D'HAUTEUR RÉGLABLE POUR RAINURER ET COUPER DES PANNEAUX
TABLE ADJUSTABLE IN HEIGHT FOR SLOTTING AND CUTTING BOARDS
HÖHENVERSTELLBARER TISCH ZUM NUTEN UND SCHNEIDEN VON PLATTEN

CARACTERISTICAS / CARACTÉRISTIQUES / CHARACTERISTICS / TECHNISCHE DATEN

	Mod. 1250	Mod. 2050	Mod. 2500
Altura máxima de la madera Hauteur maximum de la planche Maximum height of wood Max. Höhe des Holzes	100 m.m.	100 m.m.	100 m.m.
Longitud mínima de la madera Logueur minimum de la planche Minimum length of the woden board Min. Länge des Holzes	500 m.m.	500 m.m.	500 m.m.
Diámetro de las sierras Diamètre de la scie Saw diameter Sägeblätter-Durchmesser	400 m.m.	400 m.m.	400 m.m.
Diámetro del eje de las sierras Diamètre scie Saw diameter Durchmesser der Achse	70 m.m.	100 m.m.	100 m.m.
Longitud útil de la boquilla porta-sierras Longueur utile du manchon porte-scie Saw socket-length Nützliche Länge der Sägeangeltülle	1.250 m.m.	2.050 m.m.	2.500 m.m.
Anchura de la cadena de avance Largeur de la chaine d'avance Carrying chain width Breite der Vorschubkette	1.250 m.m.	2.050 m.m.	2.500 m.m.
Altura del suelo a la mesa Hauteur du sol à la table Floor to bench heigth Höhe, vom Bodem bis zum Tisch	880 m.m.	880 m.m.	880 m.m.
Potencia del motor de las sierras Puissance du moteur des scies Power of the saw engine Leistung des Sägemotors	20 a 60 H.P.	40 a 75 H.P.	40 a 100 H.P.
Potencia del motor de avance Puissance du moteur d'avance Power of the carrying engine Leistung des Vorschubmotors	3 H.P.	4 H.P.	5.5 H.P.
Velocidad del giro del eje Vitesse de tournege de l'arbre Arbor speed Geschwindigkeit der Achsendrehung	3000 r.p.m.	1500/3000 r.p.m.	1500/3000 r.p.m.
Velocidad de la banda transportadora Vitesse du conveyeur Conveyor speed Geschwindigkeit des Fördesbandes	5-25 m/min	5-25 m/min	5-25 m/min
Diámetro de las boquillas de aspiración Diamètre de la bouche d'aspiration Diameter of the suction mouth Durchmesser der Saugdüse	2x200 m.m.	3x200 m.m.	3x200 m.m.
Peso neto aproximado Poids net approximatif Aproximate net weight Nettogewicht ca	2.500 kgr	3300 kgr	3600 kgr
Dimensiones Dimensions Dimensions Abmessungen	3200x1920x1600 m.m.	3200x3720x1600 m.m.	3200x4220x1600 m.m.



FERMIN ELOLA, S.L.
Apartado 9 - Telf. 943 13 07 20 - Fax 943 13 09 66
20800 ZARAUTZ - ESPAÑA

