


# QuickWood System

## Compact Single Drum/Brush Sander

Model CS1-600

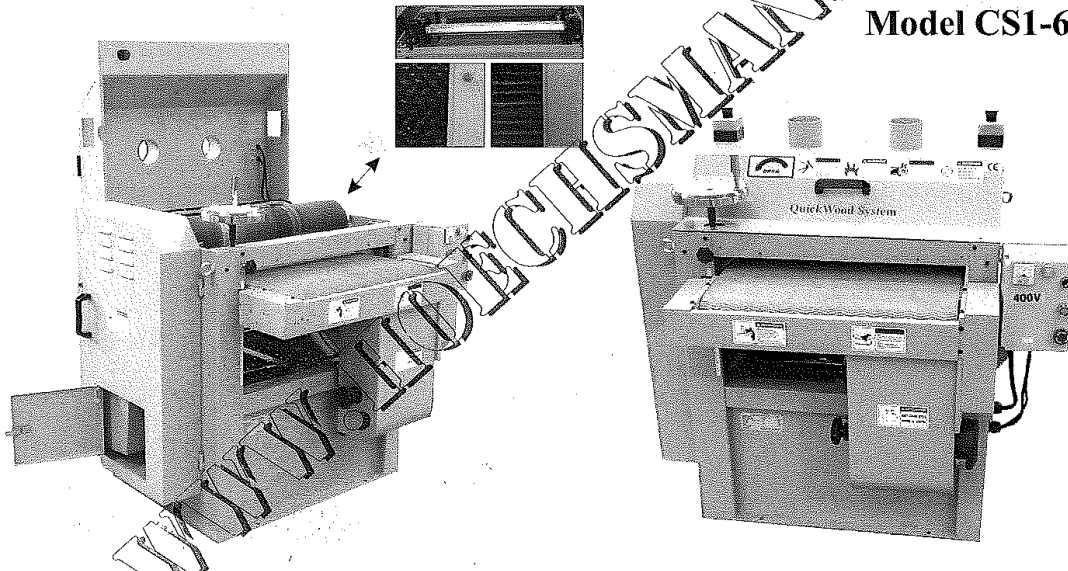

### Drum/Brush sander CS1-600

- Rigid construction throughout assures maximum stability and high quality components assure years of reliability and trouble-free performance
- Compact drum sander with changeable brush spindle - makes two machines in one
- CS1-600 is designed to perform flat parts sanding and profile parts sanding for maximum cost savings
- The machine is compact, takes up minimum floor space
- High efficiency dust system
- Heavy gauge conveyor table for durability with 0,19 kW feed motor
- Thickness limit control insures operation safety
- Variable feed speeds of 1,2-3,7 m/min. Slip-Free industrial grade conveyor belt
- 150 mm steel drum allowing for exact sizing - Steel drum will not warp like aluminum
- Specially wound abrasive belt guarantees no folding or breaking during operation
- Hexagonal spindle changeable with the steel drum for brushes till 300 mm
- Variable spindle speed 340 - 2292 UPM

### Technical Specifications:

Spindle HX/Drum, fast change	1
Drum sander, UPM	1018-2292
Brush sander, UPM	340-1720
Drum sander, mm	ø 150
Brush sander, mm	ø 300
Working width, mm	635
Working high, mm	100
Table dimension, mm	635 x 646
Main motor, kW	2,25
Belt motor, kW	0,19
Feeding speed, m/min.	1,2-3,7
Overall dimensions, mm	940 x 812 x 1092
Packing dimensions, mm	1041 x 864 x 1143
Net weight, kg	200
Gross weight, kg	240

### QuickWood ApS

Tinvej 4  
P.O. Box 180  
DK-3060 Espergaerde - Denmark

Tel.: +45 49 131948 • Fax.: +45 49 133191

E-mail: [qw@quickwood.dk](mailto:qw@quickwood.dk) • [www.quickwood.com](http://www.quickwood.com)

# QuickWood

