



4L

**Hot platens hydraulic presses
Pressa idrauliche a piani caldi**






FORTUNA

Light duty press.
Downstroke or upstroke
model for easy handling;
quality at very affordable
prices.



Pressa con pressioni specifiche limitate. Modelli con piano mobile superiore od inferiore. Investimento contenuto per un modello funzionale e semplice da utilizzare.

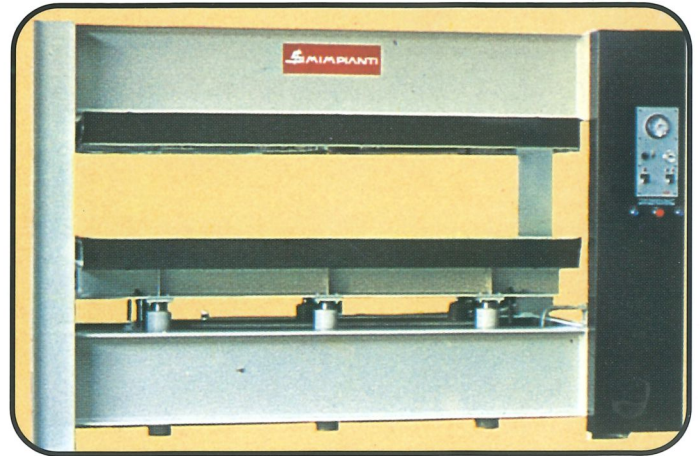

4L

Single daylight or multiopening presses to meet different customer requirements. Range of presses with specific pressures from 1,5 kg/cm² up to 10 kg/cm². Possibility of hydraulic disconnecting devices for partial use of pressing area.

Presses monovano e multivano con pressioni specifiche da 1,5 kg/cm² sino a 10 kg/cm². Possibilità di esclusione dei cilindri di spinta laterale per parziale utilizzo del piano pressante. A richiesta struttura pantografata per impegni gravosi.

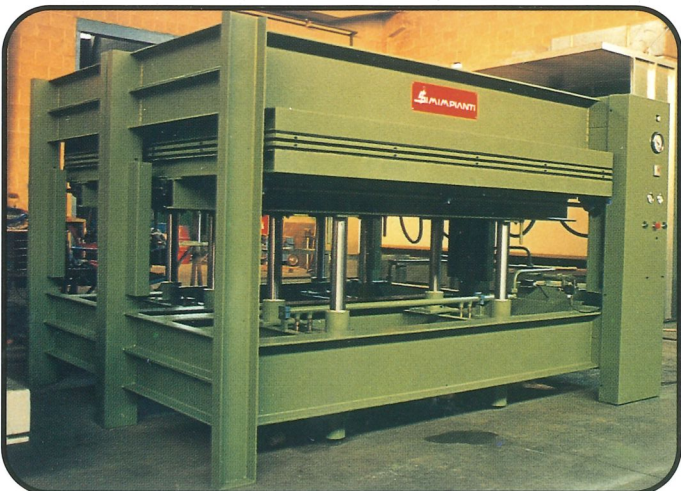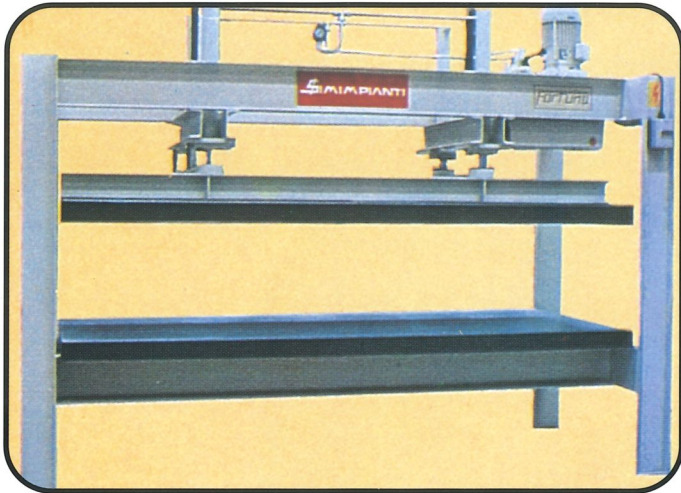



4L

Prefabricated platens, electrically heated platens, solid steel drilled platens.

Heating by circulation of hot water or diathermic oil. Electric boiler, fuel boiler, woodwaste boiler.


Piani assemblati o piani massicci. Riscaldamento dei piani ottenuto a mezzo boiler elettrico con circolazione di acqua calda od olio diatermico. Caldaie a legna o combustibile. Piani riscaldati elettricamente.





Model	Thrust	Platens dimensions		Number of rams	Stroke opening		Specific pressure 80%	
		tons	mm.		inches	mm	inches	kg/cmq
4L 5.25.13	50	2500x1300	99"x51"	4	450	17"	1.91	27
4L 8.25.13	80	2500x1300	99"x51"	4	450	17"	3.07	44
4L 12.25.13	120	2500x1300	99"x51"	6	450	17"	4.61	65
4L 16.25.13	160	2500x1300	99"x51"	8	450	17"	6.15	87
4L 8.30.13	80	3000x1300	118"x51"	4	450	17"	2.56	36
4L 12.30.13	120	3000x1300	118"x51"	6	450	17"	3.83	55
4L 16.30.13	160	3000x1300	118"x51"	8	450	17"	5.12	73
4L 20.30.13	200	3000x1300	118"x51"	10	450	17"	6.41	90

Model	Thrust	Platens dimensions		Number of rams	Stroke opening		Specific pressure 80%	
		tons	mm.		inches	mm	inches	kg/cmq
4L 12.33.13	120	3300x1300	130"x51"	6	450	17"	3.48	50
4L 16.33.13	160	3300x1300	130"x51"	8	450	17"	4.65	66
4L 20.33.13	200	3300x1300	130"x51"	10	450	17"	5.82	83
4L 24.33.13	240	3300x1300	130"x51"	12	450	17"	6.99	99
4L 12.35.13	120	3500x1300	138"x51"	6	450	17"	3.28	47
4L 16.35.13	160	3500x1300	138"x51"	8	450	17"	4.38	62
4L 20.35.13	200	3500x1300	138"x51"	10	450	17"	5.48	78
4L 24.35.13	240	3500x1300	138"x51"	12	450	17"	6.58	94

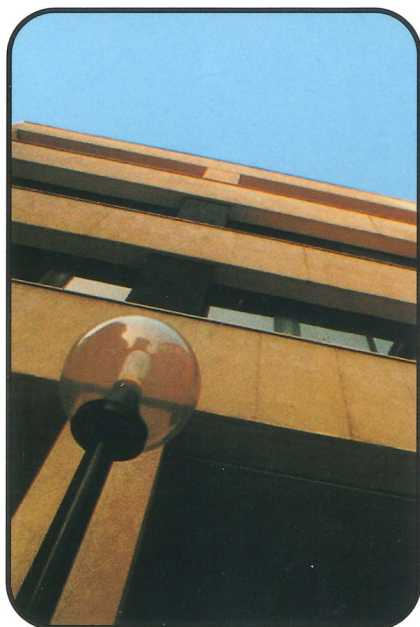

Main offices and SIMIMPIANTI factories



SIMIMPIANTI

20139 Milano ITALY - via Romilli 31
 Tel. ++39 02 55 213 741 r.a. - Fax ++39 02 53 95 305
 E-Mail: simimpianti@simimpianti.it
<http://www.simimpianti.it>

Simimpianti will not assume any liability for injuries or damages arising from, or caused by the removal of any safety device from any of its products. Because of the constant improvement of products, all specifications are subject to change without notice. I dati riportati sul presente catalogo non sono impegnativi.