


Paint mist exhaust wall – SUPERMAX



Compact extraction for you and the environment

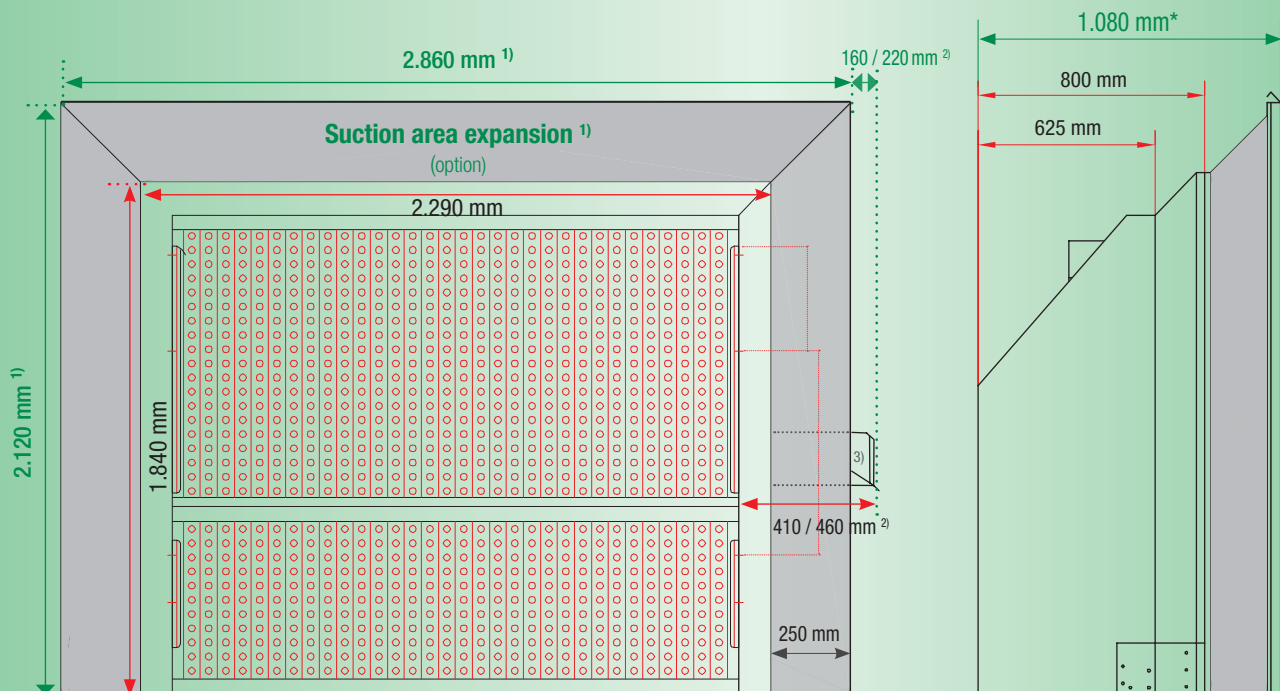

Compact extraction for you and the environment

Legal regulations are getting stricter and we are becoming more and more sensitive regarding our environment. A paint shop without contamination and working conditions that do not harm the people who work there, should be today's standard.

SUPERMAX developed by Schuko is a paint mist exhaust wall, available at a sensational price. Due to its solid and compact design with low depth, the **SUPERMAX** is the perfect solution for small and mid-sized enterprises and suitable for direct installation on the wall.

For special applications, such as a heat exchanger or extended exhaust air ducts, we offer the **SUPERMAX II** with a **stronger drive motor**².

The Schuko effect

The installation of the extension element* (option Art. No. 519770 gray area), increases the extracted work area considerably.

With little effort, a cost-effective, larger exhaust area is at your service.

* Extension of exhaust area for „SUPERMAX“, 3 sides, 45°, width 350mm, Art. No. 519770

³) The fan is mounted to the right side of the extraction wall (left side installation optional). Please note the leave space between the wall and the electric motor, to ensure sufficient ventilation.

High quality made by Schuko

Not only the price of the Schuko **SUPERMAX** is worth mentioning. Despite the excellent price you also benefit from the high Schuko product quality.

Even if you only occasionally carry out paint jobs, there is no longer any need to go without an ink mist exhaust wall due to high costs or the lack of space.

Schuko **SUPERMAX**
with **water pan** Art.-No. 517400
ramp for water basins Art.-No. 517410



Clean work has never been so economical!



Schuko SUPERMAX – in solid and compact design with low depth – the perfect solution for small rooms and shops, even suitable for direct installation on the wall.



Easy access ensures quick, trouble-free replacement of the inexpensive filter material.



Sideview Schuko SUPERMAX

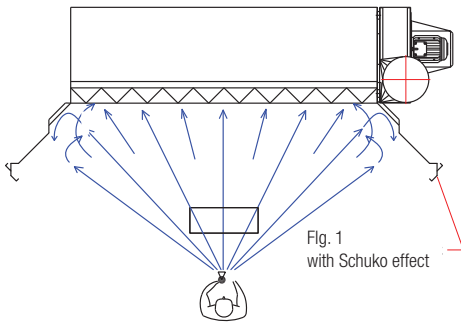


Fig. 1 with Schuko effect

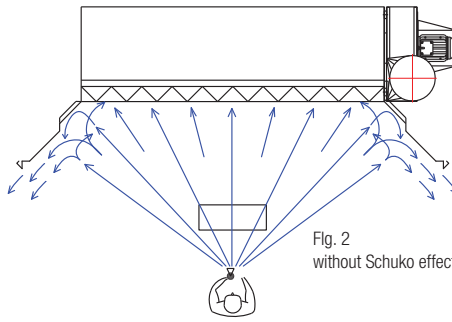


Fig. 2 without Schuko effect

Technical data	SUPERMAX Art.-No. 519700	SUPERMAX II ²⁾ Art.-No. 519780
Dimensions L/W/H:	2,700 x 800 x 1,840 mm 2,750 x 800 x 1,840 mm
Motor speed:	2,830 rpm (single-stage) identical
Protection class:	Zo Zone 1 / G / ATEX 3046 ZoZone 1 / G / ATEX 3281
Power consumption: ...	2.0 kW 3.3 kW
Weight:	195 203
Mains voltage:	3 Ph ≈ 400 V, 50 Hz identical
Nominal volume flow rate:	5,500 m ³ /h 6,400 m ³ /h
Max. volume flow rate:	7,650 m ³ /h (free blowing) identical
baffle surface:	3.2 m ² identical
Covered surface L/H: .	2,230 x 1,830 mm identical
Exhaust air pipe:	350 mm Ø 350 mm Ø
Top edge of the fan:	1,600 mm identical
accessories:	Cardboard filter mat (baffle surface): 2,000 x 1,700 x 65 mm	
Art.-No. 519710	(1 set = 10 running meters 1,000 mm and 700 mm high), self-extinguishing DIN 4102-1 B2	
Art.-No. 527750	Filter mat (interior): 2,300 x 1,500 mm M5 (1 piece)	
Art.-No. 517120	Filter mat (interior): 2,300 x 1,500 x 50 mm thick (1 piece)	
Art.-No. 517400	Water trough with grating: 2,760 x 2,020 x 50 mm L/W/H	
Art.-No. 517300	Spray stand height: 850 mm	
Art.-No. 519770	Suction area expansion 3 sides, 45°, width 350 mm	


All advantages at a glance

- ✓ Favourable purchase price
- ✓ Effective exhaust performance
- ✓ Integrated air regulating damper enables manual adjustment to local conditions and defuming operation
- ✓ Plug-in design, including 7 m of cable and motor circuit-breaker
- ✓ Easy access ensures quick, trouble-free replacement of the inexpensive filter material.
- ✓ High separation degree due to primary and secondary filters
- ✓ Low depth of only 800 mm
- ✓ Low-maintenance
- ✓ Simple assembly
- ✓ Using fire-retardant filter material according to DIN 4102-B2
- ✓ Preparation for connection of Schuko water troughs
- ✓ Comprehensive service for quick and qualified product support
- ✓ 3-fold filtration of over-spray, thus long service life of exhaust wall with maximum environmental protection

SUPERMAX – that is Schuko quality at a sensational price



Fascination of color - due to an excellent job!

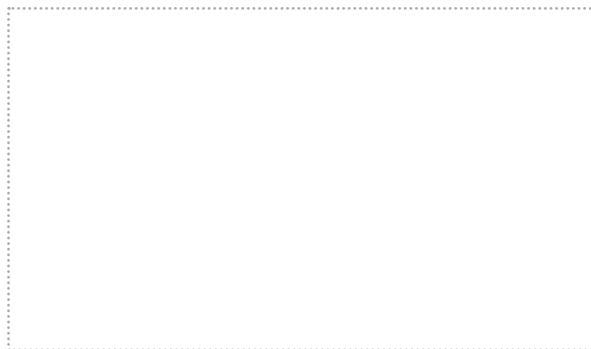

Schuko International GmbH & Co. KG
Heinrich-Schulte-Südhoff-Str. 1
14959 Trebbin, Germany

☎ +49 (0) 33731 / 77 77 94 or 95

📠 +49 (0) 33731 / 77 77 96

international@schuko.com
www.schuko.com