

# VISAGE

RANGE

*Profile*

*Grinders*



- High precision bearings
- Heavy duty arbor
- Safe and easy to use diamond dresser
- Quick adjusting stylus
- Powered head tilt (plus only)
- Variable speed (plus only)
- Template dial indicators (plus only)
- Washdown (plus only)
- Multi-stylus turret (plus only)
- Tungsten Carbide tool rest






# VISAGE

## RANGE

# THE FIRST STEP TOWARDS QUALITY OF FINISH

*The Visage range of profile grinders combines grinding technology with supreme accuracy to create a simple to use and highly productive grinder.*

*The ergonomic design creates a user friendly machine, with adjustable arm rests and all controls including the coolant tank accessible from the front of the machine*

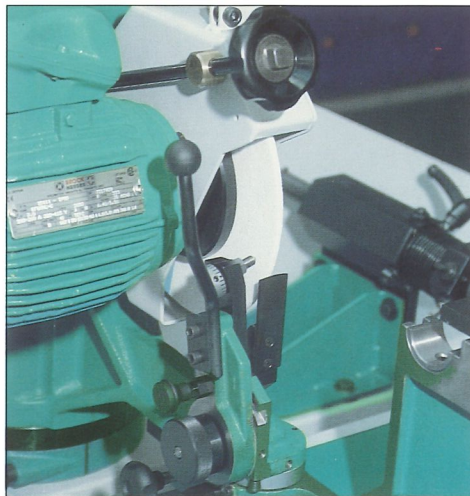

Safe and easy to use dresser.



Quick adjusting multi-stylus arrangement.

### Technical Information

Maximum cutterlength hydrolock  
Maximum cutterlength mechanical

### Visage

335mm (13")  
315mm (12½")

### Visage Plus

335mm (13")  
315mm (12½")

Cutting circle maximum (Profiling)  
Cutting circle maximum (Straight knife)

350mm (13¾")  
300mm (12")

350mm (13¾")  
300mm (12")

Cutting circle minimum

70mm (2¾")

70mm (2¾")

Depth of profile maximum

40mm (1½")

40mm (1½")

Worklamp

Halogen 20w

Halogen 20w

Spindle speed 50 Hz

3000rpm

Spindle speed 60 Hz

3600rpm

Variable speed (Profiling)

1500 – 3000rpm

Variable speed (Straight knife)

3000 – 6000rpm

Motor outputs

Grinding spindle

1.5kW (2 HP)

1.5kW (2 HP)

Coolant pump

0.15kW (0.2 HP)

0.15kW (0.2 HP)

Head tilt

0.025kW (0.03 HP)

Coolant system tank capacity

Maximum

36 litre (8 gallons)

36 litre (8 gallons)


Minimum

18 litre (4 gallons)

18 litre (4 gallons)

*As our policy is constantly to improve design, the details given in this leaflet are not to be regarded as binding. Certain models illustrated are of CE specification. Please ask your local Wadkin office or representative for details of specifications to suit your area.*

*Certain illustrations show guarding removed for clarity.*



Wadkin Ltd.

Green Lane Road, Leicester LE5 4PF, England  
Tel: +44 (0)116 2769111, Fax: +44 (0)116 2742310

